

THIS DOCUMENT SHOULD NOT BE USED TO  
DETERMINE COMPLIANCE WITH THE  
DANGEROUS GOODS REGULATIONS  
OR  
TO CREATE WORKER SAFETY DOCUMENTS  
FOR SPECIFIC CHEMICALS

**NOT FOR SALE**



**Gujarat State Disaster Management Authority**

Block No. 11, 5th Floor, Udyog Bhavan, Sector – 11,  
Gandhinagar – 382011. Gujarat, India.  
Tel: +91-79-23259283/23259246  
Fax: +91-79-23259275/23259302  
Email: info@gsdma.org



# 2012

## EMERGENCY RESPONSE GUIDEBOOK

A Guidebook for First  
Responders During  
the Initial Phase of a  
Dangerous Goods/  
Hazardous Materials  
Transportation Incident



**Gujarat State Disaster Management Authority**

## SHIPPING DOCUMENTS (PAPERS)

Shipping Documents (Papers) are synonymous and can be found as follows:

- Road – kept in the cab of a motor vehicle
- Rail – kept in possession of a crew member
- Aviation – kept in possession of the aircraft pilot
- Marine – kept in a holder on the bridge of a vessel

Shipping Documents (Papers) provide vital information regarding the hazardous materials/dangerous goods to initiate protective actions\*


Information provided:

- 4-Digit Identification Number, UN (go to Yellow Pages)
- Proper Shipping name (go to Blue Pages)
- Emergency Response Telephone Number
- Hazard Class or Division number of material
- Packing Group
- Information describing the hazards of the material (entered on or attached to shipping document)

<b>EMERGENCY CONTACT</b> 1-000-000-0000		<b>EXAMPLE OF EMERGENCY CONTACT TELEPHONE NUMBER</b>	
		<b>HAZARD CLASS OR DIVISION NO.</b>	
<b>NO. &amp; TYPE OF PACKAGES</b>		<b>QUANTITY</b>	
1 TANKTRUCK	UN1219	ISOPROPANOL	3 II 12 000 LITERS
	<b>ID NUMBER</b>	<b>SHIPPING NAME</b>	<b>PACKING GROUP</b>

### EXAMPLE OF PLACARD AND PANEL WITH ID NUMBER

The 4-digit ID Number may be shown on the diamond-shaped placard or on an adjacent orange panel displayed on the ends and sides of a cargo tank, vehicle or rail.car.

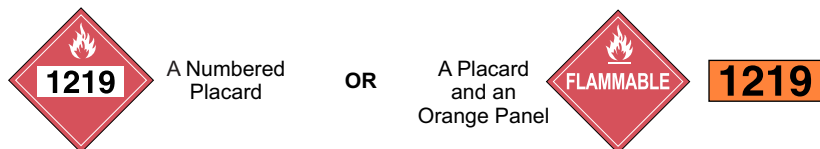

\* For the purposes of this guidebook, the terms hazardous materials/dangerous good are synonymous.

## HOW TO USE THIS GUIDEBOOK

### RESIST RUSHING IN !

**APPROACH INCIDENT FROM UPWIND, UPHILL OR UPSTREAM  
STAY CLEAR OF ALL SPILLS, VAPOURS, FUMES, SMOKE AND SUSPICIOUS SOURCES**

**STEP ONE: IDENTIFY THE MATERIAL** AND USE ANY OF THE FOLLOWING:

- **IDENTIFICATION NUMBER** (4-DIGIT ID AFTER UN) FROM A:
  - PLACARD
  - ORANGE PANEL
  - SHIPPING PAPER OR PACKAGE
- **NAME OF THE MATERIAL** FROM A:
  - SHIPPING DOCUMENT OR PACKAGE

**STEP TWO: IDENTIFY 3-DIGIT GUIDE NUMBER, USE:**

- ID NUMBER INDEX in yellow-bordered pages or
- NAME OF MATERIAL INDEX in blue-bordered pages

Guide number supplemented with the letter (P) indicates that the material may undergo violent polymerization if subjected to heat or contamination.

**INDEX ENTRIES HIGHLIGHTED IN GREEN** are a TIH (Toxic Inhalation Hazard) material, a chemicalwarfare agent or a Dangerous Water Reactive Material (produces toxic gas upon contact with water).

IDENTIFY ID NUMBER AND NAME OF MATERIAL IN TABLE 1 – INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES (the green-bordered pages).

IF NECESSARY, BEGIN PROTECTIVE ACTIONS IMMEDIATELY (see ProtectiveActions page 288). If no protective action required, use the information jointly with the 3-digit guide.

**IF A REFERENCE TO A GUIDE CANNOT BE FOUND AND THIS INCIDENT IS BELIEVED TO INVOLVE DANGEROUS GOODS:**

- Use **GUIDE 111**, UNTIL ADDITIONAL INFORMATION BECOMES AVAILABLE
- Use **GUIDE 112**, EXPLOSIVES (other than 1.4 and 1.6)
- Use **GUIDE 114**, EXPLOSIVES (1.4 and 1.6)

**STEP THREE: TURN TO THE NUMBERED GUIDE** (the orange-bordered pages) **READ CAREFULLY.**

**IF A PLACARD IS THE ONLY SOURCE OF INFORMATION**, turn to pages 6-7 and use the 3-digit guide next to the placard and Proceed to Numbered Guide in orange-bordered pages.

**AS A LAST RESORT:** IF ONLY THE CONTAINER CAN BE IDENTIFIED, CONSULT THE TABLE OF RAIL CAR AND ROAD TRAILER IDENTIFICATION CHART (page 11). INFORMATION ASSOCIATED WITH THESE CONTAINERS IS FOR WORST-CASE SCENARIOS.

**CALL THE EMERGENCY RESPONSE TELEPHONE NUMBER:**

- Listed on the shipping paper, if available.
- If shipping paper is not available, IMMEDIATELY CALL the appropriate emergency response agency telephone number listed on the inside back cover of this guidebook.
- Provide as much information as possible, such as the name of the carrier (trucking company or railroad) and vehicle number.

**BEFORE AN EMERGENCY – BECOME FAMILIAR WITH THIS GUIDEBOOK!**

First responders must be trained in the use of this guidebook.

## **SAFETY PRECAUTIONS**

### **RESIST RUSHING IN!**

#### **APPROACH CAUTIOUSLY FROM *UPWIND, UPHILL OR UPSTREAM*:**

- Stay clear of ***Vapour, Fumes, Smoke*** and ***Spills***
- Keep vehicle at a safe distance from the scene

#### **SECURE THE SCENE:**

- Isolate the area and protect yourself and others

#### **IDENTIFY THE HAZARDS USING ANY OF THE FOLLOWING:**

- Placards
- Container labels
- Shipping documents
- Rail Car and Road Trailer Identification Chart
- Material Safety Data Sheets (MSDS)
- Knowledge of persons on scene
- Consult applicable guide page

#### **ASSESS THE SITUATION:**

- Is there a fire, a spill or a leak?
- What are the weather conditions?
- What is the terrain like?
- Who/what is at risk: people, property or the environment?
- What actions should be taken – evacuation, shelter in-place or dike?
- What resources (human and equipment) are required?
- What can be done immediately?

#### **OBTAIN HELP:**

- Advise your headquarters to notify responsible agencies and call for assistance from qualified personnel

#### **RESPOND:**

- Enter only when wearing appropriate protective gear
- Rescue attempts and protecting property must be weighed against you becoming part of the problem
- Establish a command post and lines of communication
- Continually reassess the situation and modify response accordingly
- Consider safety of people in the immediate area first, including your own safety

**ABOVE ALL:** Do not assume that gases or vapours are harmless because of lack of a smell—odorless gases or vapours may be harmful. Use **CAUTION** when handling empty containers because they may still present hazards until they are cleaned and purged of all residues.

## **NOTIFICATION AND REQUEST FOR TECHNICAL INFORMATION**

Follow the steps outlined in your organization's standard operating procedures and/or local emergency response plan for obtaining qualified assistance. Generally, the notification sequence and requests for technical information beyond what is available in this guidebook should occur in the following order:

#### **1. NOTIFY YOUR ORGANIZATION/AGENCY**

- Based on information provided, this will set in motion a series of events
- Actions may range from dispatching additional trained personnel to the scene, to activating the local emergency response plan
- Ensure that local fire and police departments have been notified

#### **2. CALL THE EMERGENCY RESPONSE TELEPHONE NUMBER ON THE SHIPPING DOCUMENT**

- If shipping paper is not available, use guidance under next section “ASSISTANCE”

#### **3. ASSISTANCE**

- Contact the appropriate emergency response agency listed on the inside back cover of this guidebook
- Provide as much information about the hazardous material and the nature of the incident
- The agency will provide immediate advice on handling the early stages of the incident
- The agency will also contact the shipper or manufacturer of the material for more detailed information if necessary
- The agency will request on-scene assistance when necessary

#### **4. PROVIDE AS MUCH OF THE FOLLOWING INFORMATION AS POSSIBLE:**

- Your name, call-back telephone number, FAX number
- Location and nature of problem (spill, fire, etc.)
- Name and identification number of material(s) involved
- Shipper/consignee/point-of-origin
- Carrier name, rail car or truck number
- Container type and size
- Quantity of material transported/released
- Local conditions (weather, terrain)
- Proximity to schools, hospitals, waterways, etc.
- Injuries and exposures
- Local emergency services that have been notified

## HAZARD CLASSIFICATION SYSTEM

The hazard class of dangerous goods is indicated either by its class (or division) number or name. Placards are used to identify the class or division of a material. The hazard class or division number must be displayed in the lower corner of a placard and is required for both primary and subsidiary hazard classes and divisions, if applicable. For other than Class 7 or the OXYGEN placard, text indicating a hazard (for example, "CORROSIVE") is not required. Text is shown only in the U.S. The hazard class or division number and subsidiary hazard classes or division numbers placed in parentheses (when applicable), must appear on the shipping document after each proper shipping name.

### Class 1- Explosives

Division 1.1	Explosives with a mass explosion hazard
Division 1.2	Explosives with a projection hazard
Division 1.3	Explosives with predominantly a fire hazard
Division 1.4	Explosives with no significant blast hazard
Division 1.5	Very insensitive explosives with a mass explosion hazard
Division 1.6	Extremely insensitive articles

### Class 2- Gases

Division 2.1	Flammable gases
Division 2.2	Non-flammable, non-toxic* gases
Division 2.3	Toxic* gases

### Class 3- Flammable liquids (and Combustible liquids [U.S.])

### Class 4- Flammable solids; Spontaneously combustible materials; and Dangerous when wet materials/Water-reactive substances

Division 4.1	Flammable solids
Division 4.2	Spontaneously combustible materials
Division 4.3	Water-reactive substances/Dangerous when wet materials

### Class 5- Oxidizing substances and Organic peroxides

Division 5.1	Oxidizing substances
Division 5.2	Organic peroxides

### Class 6- Toxic\* substances and Infectious substances

Division 6.1	Toxic* substances
Division 6.2	Infectious substances

### Class 7 - Radioactive materials

### Class 8 - Corrosive substances

### Class 9 - Miscellaneous hazardous materials/Products, Substances or Organisms

\* The words "poison" or "poisonous" are synonymous with the word "toxic"

## INTRODUCTION TO THE TABLE OF PLACARDS

### USE THE TABLE OF PLACARDS ONLY WHEN THE ID NUMBER OR PROPER SHIPPING NAME IS NOT AVAILABLE.

The next two pages display the placards used on transport vehicles carrying dangerous goods with the applicable reference GUIDE circled. Follow these steps:

1. Approach scene from upwind, uphill or upstream at a safe distance to safely identify and/or read the placard or orange panel. Use binoculars if available.
2. Match the vehicle placard(s) with one of the placards displayed on the next two pages.
3. Consult the circled guide number associated with the placard. Use that guide information for now. For example:

- Use GUIDE 127 for a FLAMMABLE (Class 3) placard



- Use GUIDE 153 for a CORROSIVE (Class 8) placard




- Use GUIDE 111 when the DANGER/DANGEROUS placard is displayed or the nature of the spilled, leaking or burning material is not known. Also use this GUIDE when the presence of dangerous goods is suspected but no placards can be seen.

If multiple placards point to more than one guide, initially use the most conservative guide (i.e., the guide requiring the greatest degree of protective actions).

- 4 Guides associated with the placards provide the most significant risk and/or hazard information.
- 5 When specific information, such as ID number or proper shipping name, becomes available, the more specific Guide recommended for that material must be consulted.
- 6 Asterisks (\*) on orange placards represent explosives "Compatibility Group" letters; refer to the Glossary (page 375).
- 7 Double asterisks (\*\*) on orange placards represent the division of the explosive.


## TABLE OF PLACARDS AND INITIAL

USE THIS TABLE ONLY IF MATERIALS CANNOT BE SPECIFICALLY IDENTIFIED BY

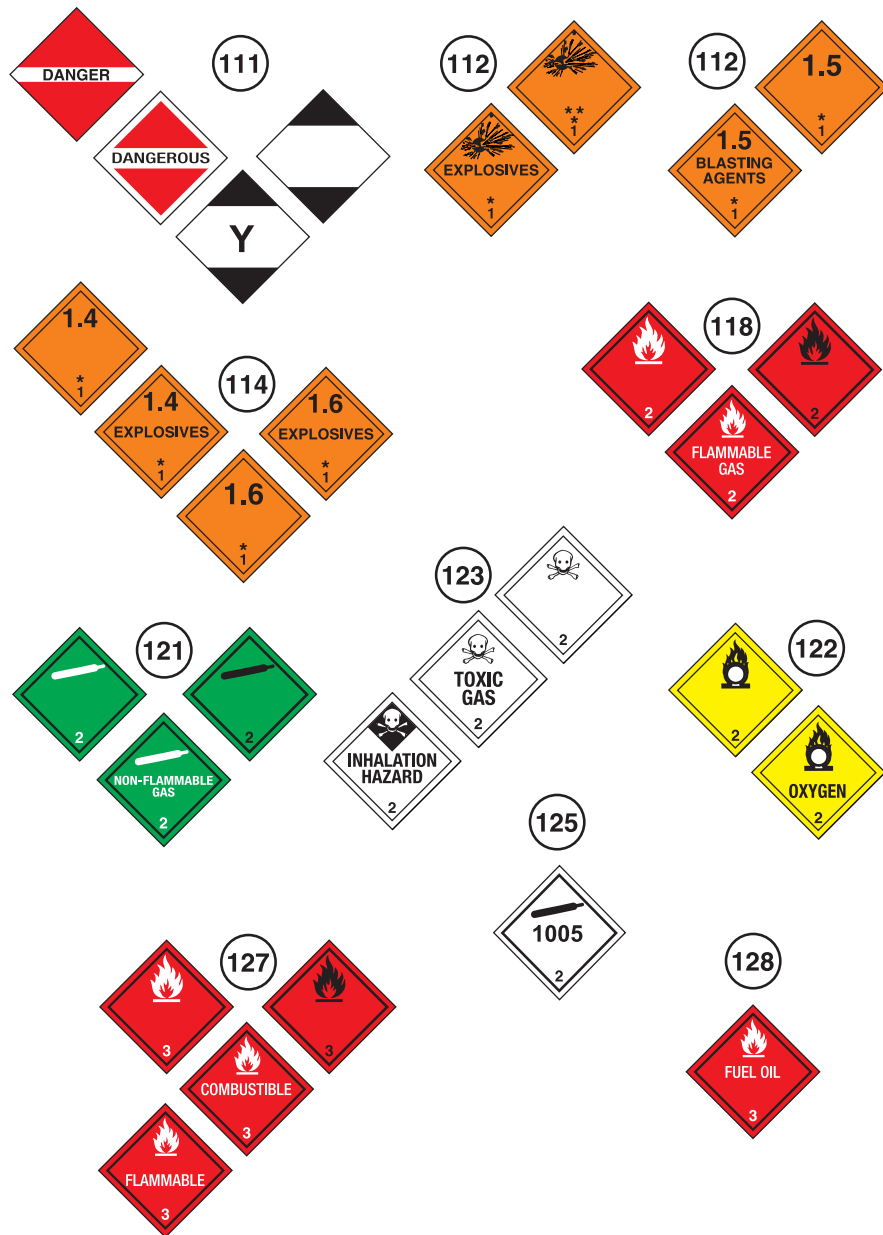

## RESPONSE GUIDE TO USE ON-SCENE

USING THE SHIPPING DOCUMENT, NUMBERED PLACARD, OR ORANGE PANEL NUMBER

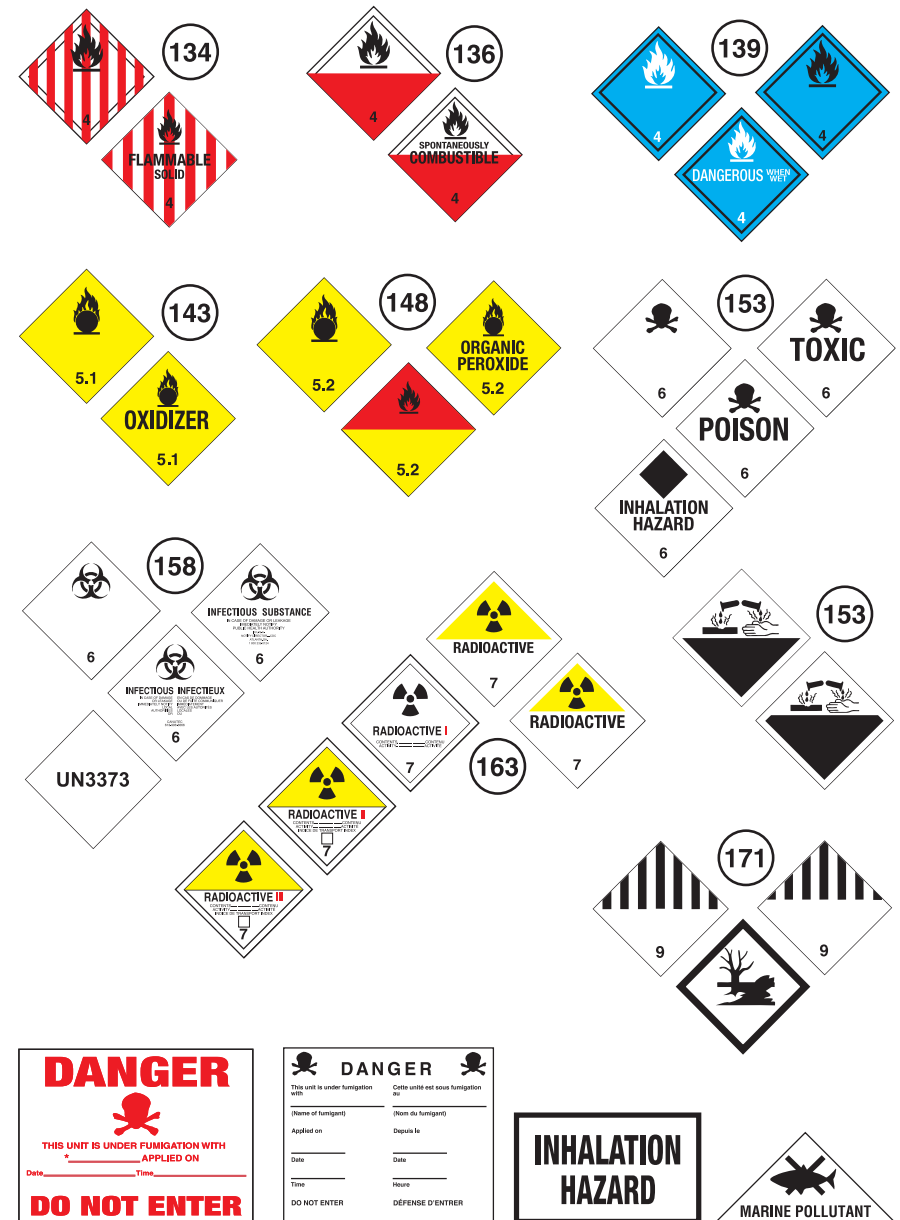


## EMERGENCY INFORMATION PANEL

In India, it is mandatory for the vehicles transporting hazardous chemicals to display Emergency Information Panel (EIP) with details and at places as specified under Rule 134 of the Central Motor Vehicles Rules, 1989 as shown in the next figure.


Every class label and emergency information panel (EIP) shall be marked on the goods carriage and shall be kept free and clean from obstruction at all times.

One practical problem encountered with the use of EIP is the selection of the substance identification number and the HAZCHEM code to be incorporated in the EIP when a tanker transports different chemicals in different compartments. The solution in such case is to incorporate the word "Multi-load" in the sections of EIP earmarked for "UN Number" and "HAZCHEM" and to label each compartment separately with the UN number and HAZCHEM code corresponding to the chemical in the compartment.

The emergency information panel (EIP) should have dimensions as shown in the next figure.

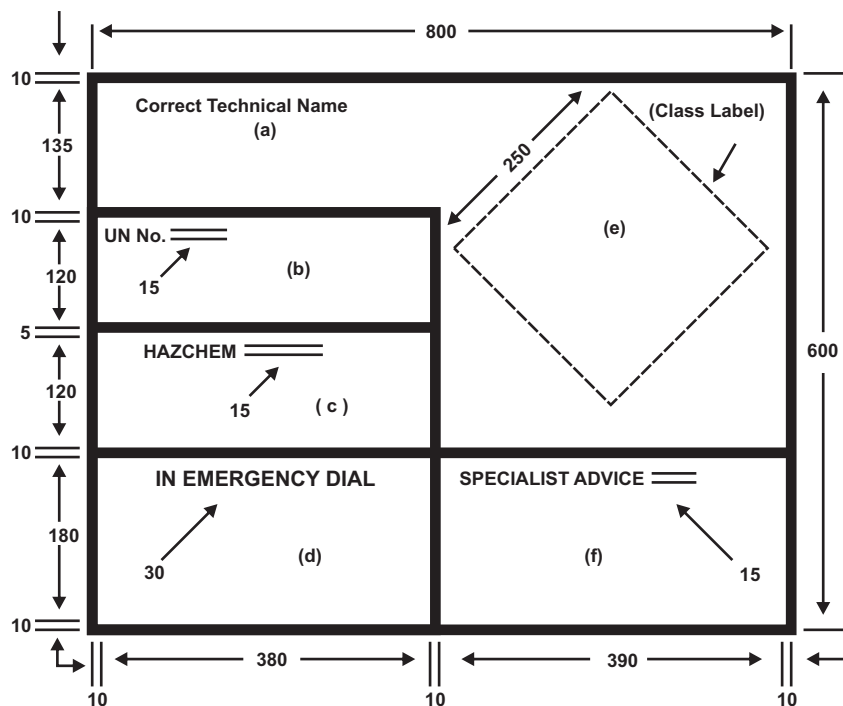


*(Having only one UN hazard class label)*

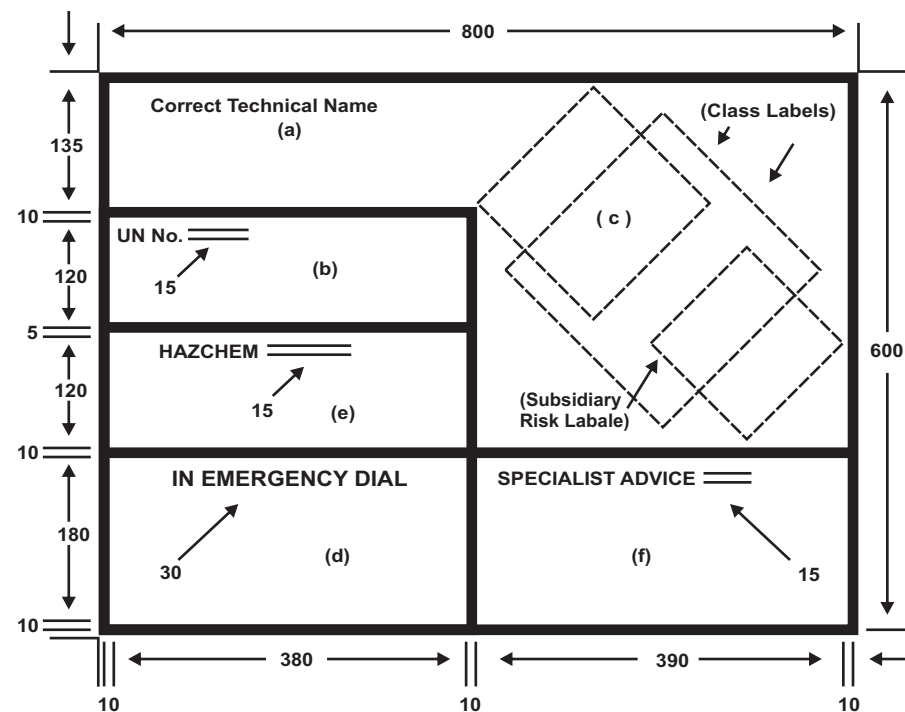

*(Having Subsidiary hazard class label)*

*(All dimensions are expressed in millimeters)*

<b>PETROLEUM PRODUCTS</b>		
UN No.	<b>1203</b>	
HAZCHEM	<b>3YE</b>	
IN EMERGENCY DIAL ooo, POLICE OR FIRE BRIGADE	Name _____ Phone _____	

*(Sample Emergency Information Panel)*

## EMERGENCY ACTION CODES (EAC)

The EAC provides information on:

- The fire extinguishing media to be used
- The level of PPE required
- Whether the spillage should be contained or may be diluted
- Whether there is a possibility of violent reaction
- Whether the substance poses a Public Safety Hazard


1 = Water Jet	2 = Fog	3 = Foam	4 = Dry Agent
---------------	---------	----------	---------------

P	V		DILUTE
R		Full	
S	V	BA	
S		BA for FIRE only	
T		BA	
T		BA for FIRE only	CONTAIN
W	V		
X		Full	
Y	V	BA	
Y		BA for FIRE only	
Z		BA	
Z		BA for FIRE only	

E	CONSIDER EVACUATION	
---	---------------------	--

K E Y	V	Can be violently or even explosively reactive
	Full	Full body protective clothing with B. A.
	BA	Breathing apparatus plus protective gloves
	DILUTE	Spillages may be washed to drains with large quantities of water. However, due care must be taken to avoid unnecessary pollution of watercourses.
	CONTAIN	Prevent the spillage from entering drains and watercourses using any means available.
	DRY AGENT	Water MUST NOT be allowed to come into contact with the substance.
	E	People should be warned to stay indoors with all doors and windows closed but evacuation may need to be considered. Consult Control, Police and product expert.
	FOG	In the absence of fog equipment a fire spray may be used.

## ROAD TRAILER IDENTIFICATION CHART

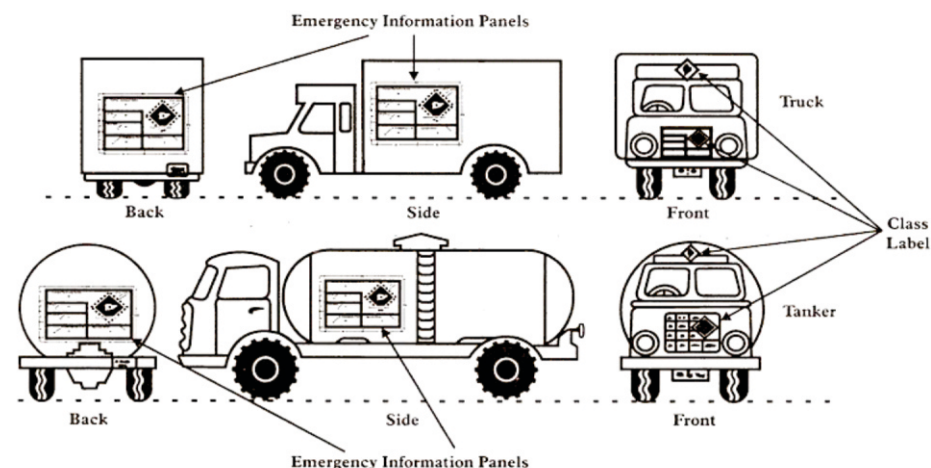

Every goods carriage used for transporting any dangerous or hazardous goods shall be legibly and conspicuously marked with an emergency information panel in each of the three places as specified, so that the emergency information panel faces to each side of the carriage and to its rear and such panel shall contain the following information viz.,

- The correct technical name of the dangerous or hazardous goods in letters not less than 50 mm high.
- The United Nations class number for the dangerous goods in letters not less than 100 mm high (Rule 137).
- The class label of the dangerous or hazardous goods in the size of not less than 250 mm square.
- The name and telephone number of the emergency services to be contacted in the event of fire or any other accident in letters and numerals that are not less than 50 mm high and the name and telephone number of the consignor of the dangerous or hazardous goods or of some other person from whom expert information and advice can be obtained concerning the measures that should be taken in the event of emergency.

**CAUTION:** This chart depicts only the most general shapes of road trailers. Emergency response personnel must be aware that there are many variations of road trailers, not illustrated above, that are used for shipping chemical products. The suggested guides are for the most hazardous products that may be transported in these trailer types.



## HAZARD IDENTIFICATION NUMBERS DISPLAYED ON SOME INTERMODAL CONTAINERS

Hazard identification numbers utilized under European and some South American regulations, may be found in the top half of an orange panel on some intermodal bulk containers. The United Nations 4-digit identification number is in the bottom half of the orange panel.



The hazard identification number in the top half of the orange panel consists of two or three digits. In general, the digits indicate the following hazards:

- 2** -Emission of gas due to pressure or chemical reaction
- 3** -Flammability of liquids (VAPOURS) and gases or self-heating liquid
- 4** -Flammability of solids or self-heating solid
- 5** -Oxidizing (fire-intensifying) effect
- 6** -Toxicity or risk of infection
- 7** -Radioactivity
- 8** -Corrosivity
- 9** -Risk of spontaneous violent reaction

**NOTE:** The risk of spontaneous violent reaction within the meaning of digit 9 include the possibility, due to the nature of a substance, of a risk of explosion, disintegration and polymerization reaction followed by the release of considerable heat or flammable and/or toxic gases.

- Doubling of a digit indicates an intensification of that particular hazard (i.e., 33, 66, 88).
- Where the hazard associated with a substance can be adequately indicated by a single digit, the digit is followed by a zero (i.e., 30, 40, 50).
- A hazard identification number prefixed by the letter "X" indicates that the substance will react dangerously with water (i.e., X88).

## HAZARD IDENTIFICATION NUMBERS DISPLAYED ON SOME INTERMODAL CONTAINERS

The hazard identification numbers listed below have the following meanings:

20	Asphyxiant gas
22	Refrigerated liquefied gas, asphyxiant
223	Refrigerated liquefied gas, flammable
225	Refrigerated liquefied gas, oxidizing (fire-intensifying)
23	Flammable gas
239	Flammable gas which can spontaneously lead to violent reaction
25	Oxidizing (fire-intensifying) gas
26	Toxic gas
263	Toxic gas, flammable
265	Toxic gas, oxidizing (fire-intensifying)
268	Toxic gas, corrosive
<hr/>	
30	Flammable liquid, or flammable liquid or solid in the molten state with a flash point above 60°C, heated to a temperature equal to or above its flash point, or self-heating liquid
323	Flammable liquid which reacts with water, emitting flammable gas
X323	Flammable liquid which reacts dangerously with water, emitting flammable gas
33	Highly flammable liquid
333	Pyrophoric liquid
X333	Pyrophoric liquid which reacts dangerously with water
336	Highly flammable liquid, toxic
338	Highly flammable liquid, corrosive
X338	Highly flammable liquid, corrosive, which reacts dangerously with water
339	Highly flammable liquid which can spontaneously lead to violent reaction
36	Flammable liquid, toxic, or self-heating liquid, toxic
362	Flammable liquid, toxic, which reacts with water, emitting flammable gas
X362	Flammable liquid, toxic, which reacts dangerously with water, emitting flammable gas
368	Flammable liquid, toxic, corrosive
38	Flammable liquid, corrosive or self-heating liquid, corrosive
382	Flammable liquid, corrosive, which reacts with water, emitting flammable gas
X382	Flammable liquid, corrosive, which reacts dangerously with water, emitting flammable gas
39	Flammable liquid which can spontaneously lead to violent reaction
<hr/>	
40	Flammable solid, or self-reactive substance, or self-heating substance
423	Solid which reacts with water, emitting flammable gas, or flammable solid which reacts with water, emitting flammable gas, or self-heating solid which reacts with water, emitting flammable gas



## HAZARD IDENTIFICATION NUMBERS DISPLAYED ON SOME INTERMODAL CONTAINERS

X423	Solid which reacts dangerously with water, emitting flammable gas, or flammable solid which reacts dangerously with water, emitting flammable gas, or self-heating solid which reacts dangerously with water, emitting flammable gas
43	Spontaneously flammable (pyrophoric) solid
X432	Spontaneously flammable (pyrophoric) solid which reacts dangerously with water, emitting flammable gas
44	Flammable solid, in the molten state at an elevated temperature
446	Flammable solid, toxic, in the molten state at an elevated temperature
46	Flammable solid, toxic, or self-heating solid, toxic
462	Toxic solid which reacts with water, emitting flammable gas
X462	Solid which reacts dangerously with water, emitting toxic gas
48	Flammable or self-heating solid, corrosive
482	Corrosive solid which reacts with water, emitting flammable gas
X482	Solid which reacts dangerously with water, emitting corrosive gas
50	Oxidizing (fire-intensifying) substance
539	Flammable organic peroxide
55	Strongly oxidizing (fire-intensifying) substance
556	Strongly oxidizing (fire-intensifying) substance, toxic
558	Strongly oxidizing (fire-intensifying) substance, corrosive
559	Strongly oxidizing (fire-intensifying) substance which can spontaneously lead to violent reaction
56	Oxidizing (fire-intensifying) substance, toxic
568	Oxidizing (fire-intensifying) substance, toxic, corrosive
58	Oxidizing (fire-intensifying) substance, corrosive
59	Oxidizing (fire intensifying) substance which can spontaneously lead to violent reaction
60	Toxic substance
606	Infectious substance
623	Toxic liquid which reacts with water, emitting flammable gas
63	Toxic substance, flammable
638	Toxic substance, flammable, corrosive
639	Toxic substance, flammable, which can spontaneously lead to violent reaction
64	Toxic solid, flammable or self-heating
642	Toxic solid which reacts with water, emitting flammable gas
65	Toxic substance, oxidizing (fire-intensifying)
66	Highly toxic substance
663	Highly toxic substance, flammable
664	Highly toxic solid, flammable or self-heating

## HAZARD IDENTIFICATION NUMBERS DISPLAYED ON SOME INTERMODAL CONTAINERS

665	Highly toxic substance, oxidizing (fire-intensifying)
668	Highly toxic substance, corrosive
X668	Highly toxic substance, corrosive, which reacts dangerously with water
669	Highly toxic substance which can spontaneously lead to violent reaction
68	Toxic substance, corrosive
69	Toxic substance which can spontaneously lead to violent reaction
70	Radioactive material
78	Radioactive material, corrosive
80	Corrosive substance
X80	Corrosive substance which reacts dangerously with water
823	Corrosive liquid which reacts with water, emitting flammable gas
83	Corrosive substance, flammable
X83	Corrosive substance, flammable, which reacts dangerously with water
839	Corrosive substance, flammable, which can spontaneously lead to violent reaction
X839	Corrosive substance, flammable, which can spontaneously lead to violent reaction and which reacts dangerously with water
84	Corrosive solid, flammable or self-heating
842	Corrosive solid which reacts with water, emitting flammable gas
85	Corrosive substance, oxidizing (fire-intensifying)
856	Corrosive substance, oxidizing (fire-intensifying) and toxic
86	Corrosive substance, toxic
88	Highly corrosive substance
X88	Highly corrosive substance which reacts dangerously with water
883	Highly corrosive substance, flammable
884	Highly corrosive solid, flammable or self-heating
885	Highly corrosive substance, oxidizing (fire-intensifying)
886	Highly corrosive substance, toxic
X886	Highly corrosive substance, toxic, which reacts dangerously with water
89	Corrosive substance which can spontaneously lead to violent reaction
90	Miscellaneous dangerous substance; environmentally hazardous substance
99	Miscellaneous dangerous substance transported at an elevated temperature

## PIPELINE TRANSPORTATION

In Gujarat, hazardous materials are transported through thousands of Kilometers of underground pipelines and related structures that can contain crude oil, natural gas, other refinery products and other commodities. Although pipelines are buried, there are above-ground structures and signs indicating the presence of underground transmission pipelines (see page 19 for Gujarat pipeline location information).

### Gas Pipelines

#### Natural Gas Transmission Pipelines

Large-diameter, steel pipelines transporting flammable, toxic and non-toxic natural gas at very high pressure.

**Structures:** Compressor Station Buildings, Valves, Metering Stations, and Aerial Patrol Markers.

**Markers:** "Warning, Caution, or Danger" appear at road, railroad, and water crossings, or may be posted at property boundaries and include operator's emergency Point-of-Contact (POC) and product transported.



#### Natural Gas Distribution Pipelines

Natural gas is delivered directly to customers via distribution pipelines--typically smaller-diameter, lower-pressure pipelines, and can be steel, plastic, or cast iron.

**Structures:** Regulator stations, customer meters and regulators, and valve box covers are the only above-ground indicators of gas distribution pipelines.

#### Gas Gathering and Gas Well Production Pipelines

Gas gathering/gas well production pipelines collect "raw" natural gas from wellheads and transport product to gas-processing and/or gas-treating plants. These gathering pipelines carry natural gas mixed with some level of gas liquids, water and, in some areas, contaminants such as hydrogen sulfide (H<sub>2</sub>S).

**Structures:** Compressor Station Buildings, Valves, Metering Stations, and Aerial Patrol Markers.

**Markers** – Often appear at road, railroad, and water crossings. Signs may be posted at property boundaries. Signs include operator's POC and product transported. Warning, Caution, or Danger will appear on signs.

**Note:** Pipelines transporting natural gas containing dangerous levels of H<sub>2</sub>S may have signs that say: "Sour Gas" or "Poison Gas".



### **For Natural Gas Pipeline Incidents**

#### **Two important things to remember:**

- Never attempt to extinguish a gas fire; this could prolong/worsen incident/cause another leak in the pipeline.
- Never attempt to operate pipeline valves; this could prolong/worsen incident/cause another leak in the pipeline.

#### **SIGNS OF GAS PIPELINE RUPTURE:**

- Loud roaring or explosive sound; OR
- Large flames and loud roaring noise.

#### **Follow these steps:**

- Immediately evacuate area;
- Move upwind, away from flames; prevent individuals from entering;
- If no flames present, do not start/turn off vehicles/electrical equipment (ex: cell phones, pagers, two-way radios, or lights) as this could cause spark/ignition;
- Abandon equipment used in/near area;
- If flames present, driving away from area is acceptable;
- Move far enough from noise to allow normal conversation;
- From safe location, call 108 or contact the local fire/law enforcement; and
- Notify pipeline operator.

### ANY ONE OF THESE COULD INDICATE A SUSPECTED GAS PIPELINE LEAK:

- Whistling/hissing sound;
- Distinctive, strong odor, similar to rotten eggs;
- Dense fog, mist, or white cloud;
- Bubbling in water, ponds, or creeks;
- Dust or dirt blowing up from ground; OR
- Discolored/dead vegetation above pipeline right-of-way.

### Follow these steps:

- Evacuate area to where you can no longer hear, see, or smell gas;
- Do not start/turn off vehicles/electrical equipment (ex: cell phones, pagers, two-way radios or lights) as this could cause spark/ignition;
- Abandon equipment used in/near the area;
- Avoid open flames;
- Prevent individuals from entering area;
- Call 108 or contact the local fire/law enforcement from a safe location; and
- Notify pipeline operator.

### Considerations for Establishing Protective Action Distance:

- Type of product (eg. sour vs sweet);
- Pressure and diameter of pipe;
- Timing of valve closure by utility (quickly for automated valves/longer for manually operated valves);
- Dissipation time of gas in pipe once valves are closed;
- Heat factor of natural gas;
- Local variables such as climate/weather, wind direction, topography, population density, demographics, and fire suppression methods available;
- Nearby building construction material/density;
- Wild land/urban interface; and
- Natural and manmade barriers (highway).

If you know the material involved, identify the three-digit guide number by looking up the name in the alphabetical list (blue-bordered pages), then using the three-digit guide number, consult the recommendations in the assigned guide.

## Liquids Pipelines

### Petroleum and Hazardous Liquids Pipelines

Crude oil, refined petroleum products, and hazardous liquids often are transported by pipelines and include gasoline, jet fuels, diesel fuel, home heating oils, carbon dioxide and anhydrous ammonia. Sometimes liquids pipelines transport natural gas liquids, which, like carbon dioxide and anhydrous ammonia, rapidly change from liquid to gaseous state when released from a pressurized pipeline.

**Structures** – Storage Tanks, Valves, Pump Stations, Aerial Patrol Markers

**Markers** – Often appear at road, railroad and water crossings, and may be posted at property boundaries. Signs include operator emergency POCs and product transported. Warning, Caution, or Danger appear on signs



### For Petroleum and Hazardous Liquids Pipeline Incidents

#### Two important things to remember:

- Never attempt to extinguish flame before shutting off supply, as this can cause formation of explosive mixtures, and
- Never attempt to operate pipeline valves. This could prolong/worsen incident—or cause another pipeline leak.

#### SIGNS OF LIQUIDS PIPELINE RUPTURE:

- Loud roaring, hissing, or explosive sound; OR
- Very large flames and loud roaring noise.

#### Follow these steps:

- Immediately evacuate area;
- Move upwind, far from flames, prevent individuals from entering area;
- If no flames present, do not start/turn off vehicles/electrical equipment (ex: cell phones, pagers, two-way radios, or lights) as this could cause spark/ignition;
- Abandon equipment used in/near the area;
- Keep traffic away; secure the area;

- If flames present, driving away from area is acceptable;
- Move far enough away from noise to allow normal conversation;
- From safe location, call 108 or contact the local fire/law enforcement; and
- From a safe area, call toll-free emergency number on right-of-way marker to notify pipeline operator.

**ANY ONE OF THESE COULD INDICATE SUSPECTED LIQUIDS PIPELINE LEAK:**

- Liquids bubbling up from ground;
- “Oil slick” on flowing/standing water;
- Flames appearing from ground;
- VAPOUR clouds;
- Discolored vegetation or snow; and
- Unusual petroleum, skunk or rotten-egg odor.

**Follow these steps:**

- Do not drive into VAPOUR cloud;
- Carefully evacuate the immediate area so you can no longer hear, see, smell odor;
- Avoid introducing sources of ignition--do not start/turn off vehicles/electrical equipment (ex: cell phones, pagers, two-way radios, or lights); as this could cause spark/ignition;
- Abandon equipment being used in/near area;
- Avoid open flames;
- Prevent individuals from entering area;
- Call 108 or contact the local fire/law enforcement from a safe location; and
- Notify pipeline operator.

**Considerations For Establishing Protective Action Distance:**

- Type of product (eg. sour vs sweet);
- Pressure/diameter of pipe;
- Timing of valve closure by utility (quickly for automated valves/longer for manually operated valves);
- Dissipation time of material in pipe once valves closed;
- Heat factor of product;
- Local variables such as climate/weather, wind direction, topography, population density, demographics and fire suppression methods available for use;

- Nearby building construction material/density;
- Wild land/urban interface; and
- Natural and man-made barriers (highway).

If you know the material involved, identify the three-digit guide number by looking up the name in the alphabetical list (blue-bordered pages), then using the three-digit guide number, consult the recommendations in the assigned guide.

**Gujarat Pipeline Location**

A Geo-Spatial Database prepared with data collated from all pipeline operators (private and public sector) in digital format. It shows all principal pipelines carrying Crude Oil, Natural Gas and refinery products categorized by Company in different districts of Gujarat. Emergency Responders / Companies can access the database during fire / other accidents (such as oil spillage) and respond effectively to ensure that it does not spread to nearby pipelines. Oil and Gas pipeline network link is available on GSDMA's Web Site: <http://gsdma.org/>

## GREEN HIGHLIGHTED ENTRIES IN YELLOW PAGES

For entries highlighted in green follow these steps:

- **IF THERE IS NO FIRE:**

- Go directly to **Table 1** (green bordered pages)
- Look up the ID number and name of material
- Identify initial isolation and protective action distances

- **IF THERE IS A FIRE or A FIRE IS INVOLVED:**

- Also consult the assigned orange guide
- If applicable, apply the evacuation information shown under

### PUBLIC SAFETY

**Note:** If the name in **Table 1** is shown with “**When Spilled In Water**”, these materials produce large amounts of Toxic Inhalation Hazard (TIH) gases when spilled in water. Some Water Reactive materials are also TIH materials themselves (e.g., Bromine trifluoride (1746), Thionyl chloride (1836), etc.). In these instances, two entries are provided in **Table 1** for land-based and water-based spills. If the Water Reactive material is **NOT** a TIH and this material is **NOT** spilled in water, **Table 1** and **Table 2** do not apply and safety distances will be found within the appropriate orange guide.

ID Guid Name of Material  
No. No.

---	112	Ammonium nitrate-fuel oil mixtures
---	158	Biological agents
---	112	Blasting agent, n.o.s.
---	112	Explosives, division 1.1, 1.2, 1.3 or 1.5
---	114	Explosives, division 1.4 or 1.6
---	153	Toxins
1001	116	Acetylene
1001	116	Acetylene, dissolved
1002	122	Air, compressed
1003	122	Air, refrigerated liquid (cryogenic liquid)
1003	122	Air, refrigerated liquid (cryogenic liquid), non - pressurized
1005	125	Ammonia, anhydrous
1005	125	Anhydrous ammonia
1006	121	Argon
1006	121	Argon, compressed
1008	125	Boron trifluoride
1008	125	Boron trifluoride, compressed
1009	126	Bromotrifluoromethane
1009	126	Refrigerant gas R-13B1
1010	116P	Butadienes, stabilized
1010	116P	Butadienes and hydro- carbon mixture, stabilized
1011	115	Butane
1011	115	Butane mixture
1012	115	Butylene
1013	120	Carbon dioxide
1013	120	Carbon dioxide, compressed
1014	122	Carbon dioxide and Oxygen mixture, compressed

ID Guid Name of Material  
No. No.

1014	122	Oxygen and Carbon dioxide mixture, compressed
1015	126	Carbon dioxide and Nitrous oxide mixture
1015	126	Nitrous oxide and Carbon dioxide mixture
1016	119	Carbon monoxide
1016	119	Carbon monoxide, compressed
1017	124	Chlorine
1018	126	Chlorodifluoromethane
1018	126	Refrigerant gas R-22
1020	126	Chloropentafluoroethane
1020	126	Refrigerant gas R-115
1021	126	1-Chloro-1,2,2,2 tetrafluoroethane
1021	126	Chlorotetrafluoroethane
1021	126	Refrigerant gas R-124
1022	126	Chlorotrifluoromethane
1022	126	Refrigerant gas R-13
1023	119	Coal gas
1023	119	Coal gas, compressed
1026	119	Cyanogen
1026	119	Cyanogen gas
1027	115	Cyclopropane
1028	126	Dichlorodifluoromethane
1028	126	Refrigerant gas R-12
1029	126	Dichlorofluoromethane
1029	126	Refrigerant gas R-21
1030	115	1,1-Difluoroethane
1030	115	Difluoroethane
1030	115	Refrigerant gas R-152a
1032	118	Dimethylamine, anhydrous
1033	115	Dimethyl ether

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1035	115	Ethane	1050	125	Hydrogen chloride, anhydrous	1066	121	Nitrogen, compressed	1079	125	Sulfur dioxide
1035	115	Ethane, compressed	1051	117	AC	1067	124	Dinitrogen tetroxide	1079	125	Sulphur dioxide
1036	118	Ethylamine	1051	117	Hydrocyanic acid, aqueous solutions, with more than 20% Hydrogen cyanide	1067	124	Nitrogen dioxide	1080	126	Sulfur hexafluoride
1037	115	Ethyl chloride	1051	117	Hydrogen cyanide, anhydrous, stabilized	1069	125	Nitrosyl chloride	1080	126	Sulphur hexafluoride
1038	115	Ethylene, refrigerated liquid (cryogenic liquid)	1051	117	Hydrogen cyanide, stabilized	1070	122	Nitrous oxide	1081	116P	Tetrafluoroethylene, stabilized
1039	115	Ethyl methyl ether	1051	117	Hydrogen cyanide, stabilized	1070	122	Nitrous oxide, compressed	1082	119P	Trifluorochloroethylene, stabilized
1039	115	Methyl ethyl ether	1052	125	Hydrogen fluoride, anhydrous	1071	119	Oil gas	1083	118	Trimethylamine, anhydrous
1040	119P	Ethylene oxide	1053	117	Hydrogen sulfide	1071	119	Oil gas, compressed	1085	116P	Vinyl bromide, stabilized
1040	119P	Ethylene oxide with Nitrogen	1053	117	Hydrogen sulphide	1072	122	Oxygen	1086	116P	Vinyl chloride, stabilized
1041	115	Carbon dioxide and Ethylene oxide mixture, with more than 9% but not more than 87% Ethylene oxide	1055	115	Isobutylene	1072	122	Oxygen, compressed	1087	116P	Vinyl methyl ether, stabilized
1041	115	Carbon dioxide and Ethylene oxide mixtures, with more than 6% Ethylene oxide	1056	121	Krypton	1073	122	Oxygen, refrigerated liquid (cryogenic liquid)	1088	127	Acetal
1041	115	Ethylene oxide and Carbon dioxide mixture, with more than 9% but not more than 87% Ethylene oxide	1056	121	Krypton, compressed	1075	115	Butane	1089	129	Acetaldehyde
1041	115	Ethylene oxide and Carbon dioxide mixtures, with more than 6 % Ethylene oxide	1057	115	Lighter refills (cigarettes) (flammable gas)	1075	115	Butane mixture	1090	127	Acetone
1041	115	Ethylene oxide and Carbon dioxide mixtures, with more than 6 % Ethylene oxide	1057	115	Lighters (cigarettes) (flammable gas)	1075	115	Butylene	1091	127	Acetone oils
1041	115	Ethylene oxide and Carbon dioxide mixtures, with more than 6 % Ethylene oxide	1058	120	Liquefied gases, nonflammable, charged with Nitrogen, Carbon dioxide or Air	1075	115	Isobutane	1092	131P	Acrolein, stabilized
1043	125	Fertilizer, ammoniating solution, with free Ammonia	1060	116P	Methylacetylene and Propadiene mixture, stabilized	1075	115	Isobutane mixture	1093	131P	Acrylonitrile, stabilized
1044	126	Fire extinguishers with compressed gas	1060	116P	Propadiene and Methylacetylene mixture, stabilized	1075	115	Isobutylene	1098	131	Allyl alcohol
1044	126	Fire extinguishers with liquefied gas	1061	118	Methylamine, anhydrous	1075	115	Liquefied petroleum gas	1099	131	Allyl bromide
1045	124	Fluorine	1062	123	Methyl bromide	1075	115	LPG	1100	131	Allyl chloride
1045	124	Fluorine, compressed	1063	115	Methyl chloride	1075	115	Petroleum gases, liquefied	1104	129	Amyl acetates
1046	121	Helium	1063	115	Refrigerant gas R-40	1075	115	Propane	1105	129	Amyl alcohols
1046	121	Helium, compressed	1064	117	Methyl mercaptan	1075	115	Propane mixture	1105	129	Pentanol
1048	125	Hydrogen bromide, anhydrous	1065	121	Neon	1075	115	Propylene	1106	132	Amylamines
1049	115	Hydrogen	1065	121	Neon, compressed	1076	125	CG	1107	129	Amyl chloride
1049	115	Hydrogen, compressed	1066	121	Nitrogen	1076	125	Diphosgene	1108	128	n-Amylene
						1076	125	DP	1108	128	1-Pentene
						1076	125	Phosgene	1109	129	Amyl formates
						1077	115	Propylene	1110	127	n-Amyl methyl ketone
						1078	126	Dispersant gas, n.o.s.	1110	127	Amyl methyl ketone
						1078	126	Refrigerant gas, n.o.s.	1110	127	Methyl amyl ketone



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1111	130	Amyl mercaptan	1150	130P	1,2-Dichloroethylene	1173	129	Ethyl acetate	1199	132P	Furfural
1112	140	Amyl nitrate	1150	130P	Dichloroethylene	1175	130	Ethylbenzene	1199	132P	Furfuraldehydes
1113	129	Amyl nitrite	1152	130	Dichloropentanes	1176	129	Ethyl borate	1201	127	Fusel oil
1114	130	Benzene	1153	127	Ethylene glycol diethyl ether	1177	130	2-Ethylbutyl acetate	1202	128	Diesel fuel
1120	129	Butanols	1154	132	Diethylamine	1177	130	Ethylbutyl acetate	1202	128	Fuel oil
1123	129	Butyl acetates	1155	127	Diethyl ether	1178	130	2-Ethylbutyraldehyde	1202	128	Fuel oil, no. 1,2,4,5,6
1125	132	n-Butylamine	1155	127	Ethyl ether	1179	127	Ethyl butyl ether	1202	128	Gas oil
1126	130	1-Bromobutane	1156	127	Diethyl ketone	1180	130	Ethyl butyrate	1202	128	Heating oil, light
1126	130	n-Butyl bromide	1157	128	Diisobutyl ketone	1181	155	Ethyl chloroacetate	1203	128	Gasohol
1127	130	Butyl chloride	1158	132	Diisopropylamine	1182	155	Ethyl chloroformate	1203	128	Gasoline
1127	130	Chlorobutanes	1159	127	Diisopropyl ether	1183	139	Ethyl dichlorosilane	1203	128	Motor spirit
1128	129	n-Butyl formate	1160	132	Dimethylamine, aqueous solution	1184	131	Ethylene dichloride	1203	128	Petrol
1129	129	Butyraldehyde	1160	132	Dimethylamine, solution	1185	131P	Ethyleneimine, stabilized	1204	127	Nitroglycerin, solution in alcohol, with not more than 1% Nitroglycerin
1130	128	Camphor oil	1161	129	Dimethyl carbonate	1188	127	Ethylene glycol monomethyl ether	1206	128	Heptanes
1131	131	Carbon bisulfide	1162	155	Dimethyldichlorosilane	1189	129	Ethylene glycol monomethyl ether acetate	1207	130	Hexaldehyde
1131	131	Carbon bisulphide	1163	131	1,1-Dimethylhydrazine	1190	129	Ethyl formate	1208	128	Hexanes
1131	131	Carbon disulfide	1163	131	Dimethylhydrazine, unsymmetrical	1191	129	Ethylhexaldehydes	1208	128	Neohexane
1131	131	Carbon disulphide	1164	130	Dimethyl sulfide	1191	129	Octyl aldehydes	1210	129	Ink, printer's, flammable
1133	128	Adhesives (flammable)	1164	130	Dimethyl sulphide	1192	129	Ethyl lactate	1210	129	Printing ink, flammable
1134	130	Chlorobenzene	1165	127	Dioxane	1193	127	Ethyl methyl ketone	1210	129	Printing ink related material
1135	131	Ethylene chlorohydrin	1166	127	Dioxolane	1193	127	Methyl ethyl ketone	1212	129	Isobutanol
1136	128	Coal tar distillates, flammable	1167	128P	Divinyl ether, stabilized	1194	131	Ethyl nitrite, solution	1212	129	Isobutyl alcohol
1139	127	Coating solution	1169	127	Extracts, aromatic, liquid	1195	129	Ethyl propionate	1213	129	Isobutyl acetate
1143	131P	Crotonaldehyde	1170	127	Ethanol	1196	155	Ethyltrichlorosilane	1214	132	Isobutylamine
1143	131P	Crotonaldehyde, stabilized	1170	127	Ethanol, solution	1197	127	Extracts, flavoring, liquid	1216	128	Isooctenes
1144	128	Crotonylene	1170	127	Ethyl alcohol	1197	127	Extracts, flavouring, liquid	1218	130P	Isoprene, stabilized
1145	128	Cyclohexane	1170	127	Ethyl alcohol, solution	1198	132	Formaldehyde, solution, flammable	1219	129	Isopropanol
1146	128	Cyclopentane	1171	127	Ethylene glycol monoethyl ether	1198	132	Formaldehyde, solutions (Formalin)	1219	129	Isopropyl alcohol
1147	130	Decahydronaphthalene	1172	129	Ethylene glycol monoethyl ether acetate	1199	132P	Furaldehydes	1220	129	Isopropyl acetate
1148	129	Diacetone alcohol							1221	132	Isopropylamine
1149	128	Butyl ethers							1222	130	Isopropyl nitrate
1149	128	Dibutyl ethers									



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1223	128	Kerosene	1262	128	Isooctane	1287	127	Rubber solution	1318	133	Cobalt resinate, precipitated
1224	127	Ketones, liquid, n.o.s.	1262	128	Octanes	1288	128	Shale oil	1320	113	Dinitrophenol, wetted with not less than 15% water
1228	131	Mercaptan mixture, liquid, flammable, poisonous, n.o.s.	1263	128	Paint (flammable)	1289	132	Sodium methylate, solution in alcohol	1321	113	Dinitrophenolates, wetted with not less than 15% water
1228	131	Mercaptan mixture, liquid, flammable, toxic, n.o.s.	1263	128	Paint related material (flammable)	1292	129	Ethyl silicate	1322	113	Dinitroresorcinol, wetted with not less than 15% water
1228	131	Mercaptans, liquid, flammable, poisonous, n.o.s.	1264	129	Paraldehyde	1292	129	Tetraethyl silicate	1323	170	Ferrocium
1228	131	Mercaptans, liquid, flammable, toxic, n.o.s.	1265	128	Isopentane	1293	127	Tinctures, medicinal	1324	133	Films, nitrocellulose base
1229	129	Mesityl oxide	1265	128	n-Pentane	1294	130	Toluene	1325	133	Flammable solid, n.o.s.
1230	131	Methanol	1265	128	Pentanes	1295	139	Trichlorosilane	1325	133	Flammable solid, organic, n.o.s.
1230	131	Methyl alcohol	1266	127	Perfumery products, with flammable solvents	1296	132	Triethylamine	1325	133	Fusee (rail or highway)
1231	129	Methyl acetate	1267	128	Petroleum crude oil	1297	132	Trimethylamine, aqueous solution	1326	170	Hafnium powder, wetted with not less than 25% water
1233	130	Methylamyl acetate	1268	128	Petroleum distillates, n.o.s.	1298	155	Trimethylchlorosilane	1327	133	Bhusa, wet, damp or contaminated with oil
1234	127	Methylal	1268	128	Petroleum products, n.o.s.	1299	128	Turpentine	1327	133	Hay, wet, damp or contaminated with oil
1235	132	Methylamine, aqueous solution	1270	128	Oil, petroleum	1300	128	Turpentine substitute	1327	133	Straw, wet, damp or contaminated with oil
1237	129	Methyl butyrate	1270	128	Petroleum oil	1301	129P	Vinyl acetate, stabilized	1328	133	Hexamethylenetetramine
1238	155	Methyl chloroformate	1272	129	Pine oil	1302	127P	Vinyl ethyl ether, stabilized	1328	133	Hexamine
1239	131	Methyl chloromethyl ether	1274	129	n-Propanol	1303	130P	Vinylidene chloride, stabilized	1330	133	Manganese resinate
1242	139	Methyldichlorosilane	1274	129	normal Propyl alcohol	1304	127P	Vinyl isobutyl ether, stabilized	1331	133	Matches, "strike anywhere"
1243	129	Methyl formate	1274	129	Propyl alcohol, normal	1305	155P	Vinyltrichlorosilane	1332	133	Metaldehyde
1244	131	Methylhydrazine	1275	129	Propionaldehyde	1305	155P	Vinyltrichlorosilane, stabilized	1333	170	Cerium, slabs, ingots or rods
1245	127	Methyl isobutyl ketone	1276	129	n-Propyl acetate	1306	129	Wood preservatives, liquid	1334	133	Naphthalene, crude
1246	127P	Methyl isopropenyl ketone, stabilized	1277	132	Monopropylamine	1307	130	Xylenes	1334	133	Naphthalene, refined
1247	129P	Methyl methacrylate monomer, stabilized	1277	132	Propylamine	1308	170	Zirconium metal, liquid suspension	1336	113	Nitroguanidine (Picrite), wetted with not less than 20% water
1248	129	Methyl propionate	1278	129	1-Chloropropane	1308	170	Zirconium suspended in a flammable liquid	1336	113	Nitroguanidine, wetted with not less than 20% water
1249	127	Methyl propyl ketone	1278	129	Propyl chloride	1309	170	Zirconium suspended in a liquid (flammable)	1337	113	Picrite, wetted
1250	155	Methyltrichlorosilane	1279	130	1,2-Dichloropropane	1310	113	Ammonium picrate, wetted with not less than 10% water			
1251	131P	Methyl vinyl ketone, stabilized	1279	130	Dichloropropane	1312	133	Borneol			
1259	131	Nickel carbonyl	1279	130	Propylene dichloride	1313	133	Calcium resinate			
1261	129	Nitromethane	1280	127P	Propylene oxide	1314	133	Calcium resinate, fused			
			1281	129	Propyl formates						
			1282	129	Pyridine						
			1286	127	Rosin oil						

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1337	113	Nitrostarch, wetted with not less than 30% solvent	1348	113	Sodium dinitro-o-cresolate, wetted with not less than 15% water	1364	133	Cotton waste, oily	1382	135	Potassium sulfide, anhydrous
1338	133	Phosphorus, amorphous	1348	113	Sodium dinitro-ortho-cresolate, wetted	1365	133	Cotton	1382	135	Potassium sulfide, with less than 30% water of crystallization
1338	133	Phosphorus, amorphous, red	1349	113	Sodium picramate, wetted with not less than 20% water	1365	133	Cotton, wet	1382	135	Potassium sulfide, with less than 30% water of hydration
1338	133	Red phosphorus	1350	133	Sulfur	1366	135	Diethylzinc	1382	135	Potassium sulphide, anhydrous
1338	133	Red phosphorus, amorphous	1350	133	Sulphur	1369	135	p-Nitrosodimethylaniline	1382	135	Potassium sulphide, with less than 30% water of crystallization
1339	139	Phosphorus heptasulfide, free from yellow and white Phosphorus	1352	170	Titanium powder, wetted with not less than 25% water	1370	135	Dimethylzinc	1382	135	Potassium sulphide, with less than 30% water of hydration
1339	139	Phosphorus heptasulphide, free from yellow and white Phosphorus	1353	133	Fabrics impregnated with weakly nitrated Nitrocellulose, n.o.s.	1372	133	Fiber, animal or vegetable, n.o.s., burnt, wet or damp	1382	135	Potassium sulphide, with less than 30% water of crystallization
1340	139	Phosphorus pentasulfide, free from yellow and white Phosphorus	1353	133	Fibers impregnated with weakly nitrated Nitrocellulose, n.o.s.	1372	133	Fibers, animal or vegetable, burnt, wet or damp	1382	135	Potassium sulphide, with less than 30% water of hydration
1340	139	Phosphorus pentasulphide, free from yellow and white Phosphorus	1353	133	Fibres impregnated with weakly nitrated Nitrocellulose, n.o.s.	1373	133	Fabrics, animal or vegetable or synthetic, n.o.s. with oil	1383	135	Aluminum powder, pyrophoric
1341	139	Phosphorus sesquisulfide, free from yellow and white Phosphorus	1353	133	Toe puffs, nitrocellulose base	1373	133	Fibers, animal or vegetable or synthetic, n.o.s. with oil	1383	135	Pyrophoric alloy, n.o.s.
1341	139	Phosphorus sesquisulphide, free from yellow and white Phosphorus	1354	113	Trinitrobenzene, wetted with not less than 30% water	1373	133	Fibres, animal or vegetable or synthetic, n.o.s. with oil	1383	135	Pyrophoric metal, n.o.s.
1343	139	Phosphorus trisulfide, free from yellow and white Phosphorus	1355	113	Trinitrobenzoic acid, wetted with not less than 30% water	1374	133	Fish meal, unstabilized	1384	135	Sodium dithionite
1343	139	Phosphorus trisulphide, free from yellow and white Phosphorus	1356	113	TNT, wetted with not less than 30% water	1374	133	Fish scrap, unstabilized	1384	135	Sodium hydrosulfite
1344	113	Picric acid, wetted with not less than 30% water	1356	113	Trinitrotoluene, wetted with not less than 30% water	1376	135	Iron oxide, spent	1384	135	Sodium hydrosulphite
1344	113	Trinitrophenol, wetted with not less than 30% water	1357	113	Urea nitrate, wetted with not less than 20% water	1376	135	Iron sponge, spent	1385	135	Sodium sulfide, anhydrous
1345	133	Rubber scrap, powdered or granulated	1358	170	Zirconium metal, powder, wet	1378	170	Metal catalyst, wetted	1385	135	Sodium sulfide, with less than 30% water of crystallization
1345	133	Rubber shoddy, powdered or granulated	1358	170	Zirconium powder, wetted with not less than 25% water	1379	133	Paper, unsaturated oil treated	1385	135	Sodium sulphide, anhydrous
1346	170	Silicon powder, amorphous	1360	139	Calcium phosphide	1380	135	Pentaborane	1385	135	Sodium sulphide, with less than 30% water of crystallization
1347	113	Silver picrate, wetted with not less than 30% water	1361	133	Carbon, animal or vegetable origin	1381	136	Phosphorus, white, dry or under water or in solution	1386	135	Seed cake, with more than 1.5% oil and not more than 11% moisture
			1361	133	Charcoal	1381	136	Phosphorus, yellow, dry or under water or in solution	1387	133	Wool waste, wet
			1362	133	Carbon, activated	1381	136	White phosphorus, dry	1389	138	Alkali metal amalgam
			1363	135	Copra	1381	136	White phosphorus, in solution	1389	138	Alkali metal amalgam, liquid
						1381	136	White phosphorus, under water	1389	138	Alkali metal amalgam, solid
						1381	136	Yellow phosphorus, dry	1390	139	Alkali metal amides
						1381	136	Yellow phosphorus, in solution	1391	138	Alkali metal dispersion
						1381	136	Yellow phosphorus, under water	1391	138	Alkaline earth metal dispersion
									1392	138	Alkaline earth metal amalga

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1392	138	Alkaline earth metal amalgam, liquid	1420	138	Potassium, metal alloys, liquid	1448	141	Barium permanganate	1471	140	Lithium hypochlorite mixtures, dry
1393	138	Alkaline earth metal alloy, n.o.s.	1421	138	Alkali metal alloy, liquid, n.o.s.	1449	141	Barium peroxide	1472	143	Lithium peroxide
1394	138	Aluminum carbide	1422	138	Potassium sodium alloys	1450	141	Bromates, inorganic, n.o.s.	1473	140	Magnesium bromate
1395	139	Aluminum ferrosilicon powder	1422	138	Potassium sodium alloys, liquid	1451	140	Caesium nitrate	1474	140	Magnesium nitrate
1396	138	Aluminum powder, uncoated	1422	138	Sodium potassium alloys	1451	140	Cesium nitrate	1475	140	Magnesium perchlorate
1397	139	Aluminum phosphide	1422	138	Sodium potassium alloys, liquid	1452	140	Calcium chlorate	1476	140	Magnesium peroxide
1398	138	Aluminum silicon powder, uncoated	1423	138	Rubidium	1453	140	Calcium chlorite	1477	140	Nitrates, inorganic, n.o.s.
1400	138	Barium	1423	138	Rubidium metal	1454	140	Calcium nitrate	1479	140	Oxidizing solid, n.o.s.
1401	138	Calcium	1426	138	Sodium borohydride	1455	140	Calcium perchlorate	1481	140	Perchlorates, inorganic, n.o.s.
1402	138	Calcium carbide	1427	138	Sodium hydride	1456	140	Calcium permanganate	1482	140	Permanganates, inorganic, n.o.s.
1403	138	Calcium cyanamide, with more than 0.1% Calcium carbide	1428	138	Sodium	1457	140	Calcium peroxide	1483	140	Peroxides, inorganic, n.o.s.
1404	138	Calcium hydride	1431	138	Sodium methylate	1458	140	Borate and Chlorate mixtures	1484	140	Potassium bromate
1405	138	Calcium silicide	1431	138	Sodium methylate, dry	1458	140	Chlorate and Borate mixtures	1485	140	Potassium chlorate
1407	138	Caesium	1432	139	Sodium phosphide	1459	140	Chlorate and Magnesium chloride mixture	1486	140	Potassium nitrate
1407	138	Cesium	1433	139	Stannic phosphides	1459	140	Chlorate and Magnesium chloride mixture, solid	1487	140	Potassium nitrate and Sodium nitrite mixture
1408	139	Ferrosilicon	1435	138	Zinc ashes	1459	140	Magnesium chloride and Chlorate mixture	1487	140	Sodium nitrite and Potassium nitrate mixture
1409	138	Hydrides, metal, n.o.s.	1435	138	Zinc dross	1459	140	Magnesium chloride and Chlorate mixture, solid	1488	140	Potassium nitrite
1409	138	Metal hydrides, water-reactive, n.o.s.	1435	138	Zinc residue	1461	140	Chlorates, inorganic, n.o.s.	1489	140	Potassium perchlorate
1410	138	Lithium aluminum hydride	1435	138	Zinc skimmings	1462	143	Chlorites, inorganic, n.o.s.	1490	140	Potassium permanganate
1411	138	Lithium aluminum hydride, ethereal	1436	138	Zinc dust	1463	141	Chromium trioxide, anhydrous	1491	144	Potassium peroxide
1413	138	Lithium borohydride	1436	138	Zinc powder	1465	140	Didymium nitrate	1492	140	Potassium persulfate
1414	138	Lithium hydride	1437	138	Zirconium hydride	1466	140	Ferric nitrate	1492	140	Potassium persulphate
1415	138	Lithium	1438	140	Aluminum nitrate	1467	143	Guanidine nitrate	1493	140	Silver nitrate
1417	138	Lithium silicon	1439	141	Ammonium dichromate	1469	141	Lead nitrate	1494	141	Sodium bromate
1418	138	Magnesium alloys powder	1442	143	Ammonium perchlorate	1470	141	Lead perchlorate	1495	140	Sodium chlorate
1418	138	Magnesium powder	1444	140	Ammonium persulfate	1470	141	Lead perchlorate, solid	1496	143	Sodium chlorite
1419	139	Magnesium aluminum phosphide	1444	140	Ammonium persulphate	1470	141	Lead perchlorate, solution	1498	140	Sodium nitrate
1420	138	Potassium, metal alloys	1445	141	Barium chlorate	1471	140	Lithium hypochlorite, dry	1499	140	Potassium nitrate and Sodium nitrate mixture
			1445	141	Barium chlorate, solid	1471	140	Lithium hypochlorite mixture			
			1446	141	Barium nitrate						
			1447	141	Barium perchlorate						
			1447	141	Barium perchlorate, solid						

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1499	140	Sodium nitrate and Potassium nitrate mixture	1549	157	Antimony compound, inorganic, solid, n.o.s.	1574	151	Calcium arsenate and Calcium arsenite mixture, solid	1590	153	Dichloroanilines, liquid
1500	140	Sodium nitrite	1550	151	Antimony lactate	1574	151	Calcium arsenite and Calcium arsenate mixture, solid	1590	153	Dichloroanilines, solid
1502	140	Sodium perchlorate	1551	151	Antimony potassium tartrate	1575	157	Calcium cyanide	1591	152	o-Dichlorobenzene
1503	140	Sodium permanganate	1553	154	Arsenic acid, liquid	1577	153	Chlorodinitrobenzenes	1593	160	Dichloromethane
1504	144	Sodium peroxide	1554	154	Arsenic acid, solid	1577	153	Chlorodinitrobenzenes, liquid	1593	160	Methylene chloride
1505	140	Sodium persulfate	1555	151	Arsenic bromide	1577	153	Chlorodinitrobenzenes, solid	1594	152	Diethyl sulfate
1505	140	Sodium persulphate	1556	152	Arsenic compound, liquid, n.o.s.	1577	153	Dinitrochlorobenzenes	1594	152	Diethyl sulphate
1506	143	Strontium chlorate	1556	152	Arsenic compound, liquid, n.o.s., inorganic	1578	152	Chloronitrobenzenes	1595	156	Dimethyl sulfate
1506	143	Strontium chlorate, solid	1556	152	MD	1578	152	Chloronitrobenzenes, liquid	1595	156	Dimethyl sulphate
1506	143	Strontium chlorate, solution	1556	152	Methyldichloroarsine	1578	152	Chloronitrobenzenes, solid	1596	153	Dinitroanilines
1507	140	Strontium nitrate	1556	152	PD	1579	153	4-Chloro-o-toluidine hydrochloride	1597	152	Dinitrobenzenes
1508	140	Strontium perchlorate	1557	152	Arsenic compound, solid, n.o.s.	1579	153	4-Chloro-o-toluidine hydrochloride, solid	1597	152	Dinitrobenzenes, liquid
1509	143	Strontium peroxide	1557	152	Arsenic compound, solid, n.o.s., inorganic	1580	154	Chloropicrin	1597	152	Dinitrobenzenes, solid
1510	143	Tetranitromethane	1558	152	Arsenic	1581	123	Chloropicrin and Methyl bromide mixture	1598	153	Dinitro-o-cresol
1511	140	Urea hydrogen peroxide	1559	151	Arsenic pentoxide	1581	123	Methyl bromide and Chloropicrin mixture	1599	153	Dinitrophenol, solution
1512	140	Zinc ammonium nitrite	1560	157	Arsenic chloride	1582	119	Chloropicrin and Methyl chloride mixture	1600	152	Dinitrotoluenes, molten
1513	140	Zinc chlorate	1560	157	Arsenic trichloride	1582	119	Methyl chloride and Chloropicrin mixture	1601	151	Disinfectant, solid, poisonous, n.o.s.
1514	140	Zinc nitrate	1561	151	Arsenic trioxide	1583	154	Chloropicrin mixture, n.o.s.	1601	151	Disinfectant, solid, toxic, n.o.s.
1515	140	Zinc permanganate	1562	152	Arsenical dust	1585	151	Copper acetoarsenite	1601	151	Disinfectants, solid, n.o.s. (poisonous)
1516	143	Zinc peroxide	1564	154	Barium compound, n.o.s.	1586	151	Copper arsenite	1602	151	Dye, liquid, poisonous, n.o.s.
1517	113	Zirconium picramate, wetted with not less than 20% water	1565	157	Barium cyanide	1587	151	Copper cyanide	1602	151	Dye, liquid, toxic, n.o.s.
1541	155	Acetone cyanohydrin, stabilized	1566	154	Beryllium compound, n.o.s.	1588	157	Cyanides, inorganic, n.o.s.	1602	151	Dye intermediate, liquid, poisonous, n.o.s.
1544	151	Alkaloids, solid, n.o.s. (poisonous)	1567	134	Beryllium powder	1588	157	Cyanides, inorganic, solid, n.o.s.	1602	151	Dye intermediate, liquid, toxic, n.o.s.
1544	151	Alkaloid salts, solid, n.o.s. (poisonous)	1569	131	Bromoacetone	1589	125	CK	1603	155	Ethyl bromoacetate
1545	155	Allyl isothiocyanate, stabilized	1570	152	Brucine	1589	125	Cyanogen chloride, stabilized	1604	132	Ethylenediamine
1546	151	Ammonium arsenate	1571	113	Barium azide, wetted with not less than 50% water	1590	153	Dichloroanilines	1605	154	Ethylene dibromide
1547	153	Aniline	1572	151	Cacodylic acid				1606	151	Ferric arsenate
1548	153	Aniline hydrochloride	1573	151	Calcium arsenate				1607	151	Ferric arsenite
1549	157	Antimony compound, inorganic, n.o.s.							1608	151	Ferrous arsenate

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1611	151	Hexaethyl tetraphosphate	1636	154	Mercury cyanide	1655	151	Nicotine preparation, solid, n.o.s.	1680	157	Potassium cyanide
1611	151	Hexaethyl tetraphosphate, liquid	1637	151	Mercury gluconate	1656	151	Nicotine hydrochloride	1680	157	Potassium cyanide, solid
1611	151	Hexaethyl tetraphosphate, solid	1638	151	Mercury iodide	1656	151	Nicotine hydrochloride, liquid	1683	151	Silver arsenite
1612	123	Hexaethyl tetraphosphate and compressed gas mixture	1639	151	Mercury nucleate	1656	151	Nicotine hydrochloride, solid	1684	151	Silver cyanide
1613	154	Hydrocyanic acid, aqueous solution, with less than 5% Hydrogen cyanide	1640	151	Mercury oleate	1656	151	Nicotine hydrochloride, solution	1685	151	Sodium arsenate
1613	154	Hydrocyanic acid, aqueous solution, with not more than 20% Hydrogen cyanide	1641	151	Mercury oxide	1657	151	Nicotine salicylate	1686	154	Sodium arsenite, aqueous solution
1613	154	Hydrogen cyanide, aqueous solution, with not more than 20% Hydrogen cyanide	1642	151	Mercuric oxycyanide	1658	151	Nicotine sulfate, solid	1687	153	Sodium azide
1613	154	Hydrogen cyanide, aqueous solution, with not more than 20% Hydrogen cyanide	1642	151	Mercury oxycyanide, desensitized	1658	151	Nicotine sulfate, solution	1688	152	Sodium cacodylate
1614	152	Hydrogen cyanide, stabilized (absorbed)	1643	151	Mercury potassium iodide	1658	151	Nicotine sulphate, solid	1689	157	Sodium cyanide
1616	151	Lead acetate	1644	151	Mercury salicylate	1658	151	Nicotine sulphate, solution	1689	157	Sodium cyanide, solid
1617	151	Lead arsenates	1645	151	Mercuric sulfate	1659	151	Nicotine tartrate	1690	154	Sodium fluoride
1618	151	Lead arsenites	1645	151	Mercuric sulphate	1660	124	Nitric oxide	1690	154	Sodium fluoride, solid
1620	151	Lead cyanide	1645	151	Mercury sulfate	1660	124	Nitric oxide, compressed	1691	151	Strontium arsenite
1621	151	London purple	1645	151	Mercury sulphate	1661	153	Nitroanilines	1692	151	Strychnine
1622	151	Magnesium arsenate	1646	151	Mercury thiocyanate	1662	152	Nitrobenzene	1692	151	Strychnine salts
1623	151	Mercuric arsenate	1647	151	Ethylene dibromide and Methyl bromide mixture, liquid	1663	153	Nitrophenols	1693	159	Tear gas devices
1624	154	Mercuric chloride	1647	151	Methyl bromide and Ethylene dibromide mixture, liquid	1664	152	Nitrotoluenes	1693	159	Tear gas substance, liquid, n.o.s.
1625	141	Mercuric nitrate	1648	127	Acetonitrile	1664	152	Nitrotoluenes, liquid	1693	159	Tear gas substance, solid, n.o.s.
1626	157	Mercuric potassium cyanide	1648	127	Methyl cyanide	1664	152	Nitrotoluenes, solid	1694	159	Bromobenzyl cyanides
1627	141	Mercurous nitrate	1649	131	Motor fuel anti-knock mixture	1665	152	Nitroxylenes	1694	159	Bromobenzyl cyanides, liquid
1629	151	Mercury acetate	1650	153	beta-Naphthylamine	1665	152	Nitroxylenes, liquid	1694	159	Bromobenzyl cyanides, solid
1630	151	Mercury ammonium chloride	1650	153	beta-Naphthylamine, solid	1669	151	Nitroxylenes, solid	1694	159	CA
1631	154	Mercury benzoate	1650	153	Naphthylamine (beta)	1670	157	Perchloromethyl mercaptan	1695	131	Chloroacetone, stabilized
1634	154	Mercuric bromide	1650	153	Naphthylamine (beta), solid	1671	153	Phenol, solid	1697	153	Chloroacetophenone
1634	154	Mercurous bromide	1651	153	Naphthylthiourea	1672	151	Phenylcarbylamine chloride	1697	153	Chloroacetophenone, liquid
1634	154	Mercury bromides	1652	153	Naphthylurea	1673	153	Phenylenediamines	1697	153	Chloroacetophenone, solid
1636	154	Mercuric cyanide	1653	151	Nickel cyanide	1674	151	Phenylmercuric acetate	1697	153	CN
			1654	151	Nicotine	1677	151	Potassium arsenate	1698	154	Adamsite
			1655	151	Nicotine compound, solid, n.o.s.	1678	154	Potassium arsenite	1698	154	Diphenylamine chloroarsine
						1679	157	Potassium cuprocyanide			



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1698	154	DM	1715	137	Acetic anhydride	1740	154	Hydrogendifluorides, solid, n.o.s.	1754	137	Chlorosulphonic acid and Sulphur trioxide mixture
1699	151	DA	1716	156	Acetyl bromide	1741	125	Boron trichloride	1754	137	Sulfur trioxide and Chlorosulfonic acid mixture
1699	151	Diphenylchloroarsine	1717	155	Acetyl chloride	1742	157	Boron trifluoride acetic acid complex	1754	137	Sulphur trioxide and Chlorosulphonic acid mixture
1699	151	Diphenylchloroarsine, liquid	1718	153	Acid butyl phosphate	1742	157	Boron trifluoride acetic acid complex, liquid	1755	154	Chromic acid, solution
1699	151	Diphenylchloroarsine, solid	1718	153	Butyl acid phosphate	1743	157	Boron trifluoride propionic acid complex	1756	154	Chromic fluoride, solid
1700	159	Tear gas candles	1719	154	Caustic alkali liquid, n.o.s.	1743	157	Boron trifluoride propionic acid complex, liquid	1757	154	Chromic fluoride, solution
1700	159	Tear gas grenades	1722	155	Allyl chlorocarbonate	1744	154	Bromine	1758	137	Chromium oxychloride
1701	152	Xylol bromide	1722	155	Allyl chloroformate	1744	154	Bromine, solution	1759	154	Corrosive solid, n.o.s.
1701	152	Xylol bromide, liquid	1723	132	Allyl iodide	1744	154	Bromine, solution (Inhalation Hazard Zone A)	1759	154	Ferrous chloride, solid
1702	151	1,1,2,2-Tetrachloroethane	1724	155	Allyltrichlorosilane, stabilized	1744	154	Bromine, solution (Inhalation Hazard Zone B)	1760	154	Chemical kit
1702	151	Tetrachloroethane	1725	137	Aluminum bromide, anhydrous	1744	154	Bromine, solution (Inhalation Hazard Zone B)	1760	154	Compound, cleaning liquid (corrosive)
1704	153	Tetraethyl dithiopyrophosphate	1726	137	Aluminum chloride, anhydrous	1745	144	Bromine pentafluoride	1760	154	Compound, tree or weed killing, liquid (corrosive)
1704	153	Tetraethyl dithiopyrophosphate, mixture, dry or liquid	1727	154	Ammonium bifluoride, solid	1746	144	Bromine trifluoride	1760	154	Corrosive liquid, n.o.s.
1707	151	Thallium compound, n.o.s.	1727	154	Ammonium hydrogendifluoride, solid	1747	155	Butyltrichlorosilane	1760	154	Ferrous chloride, solution
1708	153	Toluidines	1727	154	Ammonium hydrogen fluoride, solid	1748	140	Calcium hypochlorite, dry	1761	154	Cupriethylenediamine, solution
1708	153	Toluidines, liquid	1728	155	Amyltrichlorosilane	1748	140	Calcium hypochlorite mixture, dry, with more than 39% available Chlorine (8.8% available Oxygen)	1762	156	Cyclohexenyltrichlorosilane
1708	153	Toluidines, solid	1729	156	Anisoyl chloride	1749	124	Chlorine trifluoride	1763	156	Cyclohexyltrichlorosilane
1709	151	2,4-Toluenediamine	1730	157	Antimony pentachloride, liquid	1750	153	Chloroacetic acid, liquid	1764	153	Dichloroacetic acid
1709	151	2,4-Toluylenediamine	1731	157	Antimony pentachloride, solution	1750	153	Chloroacetic acid, solution	1765	156	Dichloroacetyl chloride
1709	151	2,4-Toluylenediamine, solid	1732	157	Antimony pentafluoride	1751	153	Chloroacetic acid, solid	1766	156	Dichlorophenyltrichlorosilane
1710	160	Trichloroethylene	1733	157	Antimony trichloride	1752	156	Chloroacetyl chloride	1767	155	Diethyldichlorosilane
1711	153	Xylidines	1733	157	Antimony trichloride, liquid	1753	156	Chlorophenyltrichlorosilane	1768	154	Difluorophosphoric acid, anhydrous
1711	153	Xylidines, liquid	1733	157	Antimony trichloride, solid	1754	137	Chlorosulfonic acid	1769	156	Diphenyldichlorosilane
1711	153	Xylidines, solid	1733	157	Antimony trichloride, solution	1754	137	Chlorosulfonic acid and Sulfur trioxide mixture	1770	153	Diphenylmethyl bromide
1712	151	Zinc arsenate	1736	137	Benzoyl chloride	1754	137	Chlorosulphonic acid	1771	156	Dodecyltrichlorosilane
1712	151	Zinc arsenate and Zinc arsenite mixture	1737	156	Benzyl bromide	1754	137	Chlorosulphonic acid	1773	157	Ferric chloride
1712	151	Zinc arsenite	1738	156	Benzyl chloride	1754	137	Chlorosulphonic acid	1773	157	Ferric chloride, anhydrous
1712	151	Zinc arsenite and Zinc arsenate mixture	1739	137	Benzyl chloroformate						
1713	151	Zinc cyanide	1740	154	Hydrogendifluorides, n.o.s.						
1714	139	Zinc phosphide									

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1774	154	Fire extinguisher charges, corrosive liquid	1790	157	Hydrofluoric acid	1810	137	Phosphorus oxychloride	1826	157	Nitrating acid mixture, spent, with more than 50% nitric acid
1775	154	Fluoboric acid	1790	157	Hydrofluoric acid, solution	1811	154	Potassium hydrogendifluoride	1826	157	Nitrating acid mixture, spent, with not more than 50% nitric acid
1775	154	Fluoroboric acid	1791	154	Hypochlorite solution	1811	154	Potassium hydrogen difluoride, solid	1827	137	Stannic chloride, anhydrous
1776	154	Fluorophosphoric acid, anhydrous	1791	154	Hypochlorite solution, with more than 5% available Chlorine	1812	154	Potassium fluoride	1827	137	Tin tetrachloride
1777	137	Fluorosulfonic acid	1792	157	Iodine monochloride, solid	1812	154	Potassium fluoride, solid	1828	137	Sulfur chlorides
1777	137	Fluorosulphonic acid	1793	153	Isopropyl acid phosphate	1813	154	Caustic potash, dry, solid	1828	137	Sulphur chlorides
1778	154	Fluorosilicic acid	1794	154	Lead sulfate, with more than 3% free acid	1813	154	Potassium hydroxide, dry, solid	1829	137	Sulfur trioxide, stabilized
1778	154	Fluosilicic acid	1794	154	Lead sulphate, with more than 3% free acid	1813	154	Potassium hydroxide, flake	1829	137	Sulphur trioxide, stabilized
1778	154	Hydrofluorosilicic acid	1796	157	Nitrating acid mixture with more than 50% nitric acid	1814	154	Caustic potash, liquid	1830	137	Sulfuric acid
1779	153	Formic acid	1796	157	Ni t rat ing acid mi x ture wi th not more than 50% nitric acid	1814	154	Caustic potash, solution	1830	137	Sulfuric acid, with more than 51% acid
1779	153	Formic acid, with more than 85% acid	1796	157	Ni t rat ing acid mi x ture wi th not more than 50% nitric acid	1814	154	Potassium hydroxide, solution	1830	137	Sulphuric acid
1780	156	Fumaryl chloride	1798	157	Aqua regia	1815	132	Propionyl chloride	1830	137	Sulphuric acid, with more than 51% acid
1781	156	Hexadecyltrichlorosilane	1798	157	Nitrohydrochloric acid	1816	155	Propyltrichlorosilane	1831	137	Sulfuric acid, fuming
1782	154	Hexafluorophosphoric acid	1798	157	Nitrohydrochloric acid	1817	137	Pyrosulfuryl chloride	1831	137	Sulfuric acid, fuming, with less than 30% free Sulfur trioxide
1783	153	Hexamethylenediamine, solution	1799	156	Nonyltrichlorosilane	1817	137	Pyrosulphuryl chloride	1831	137	Sulfuric acid, fuming, with not less than 30% free Sulfur trioxide
1784	156	Hexyltrichlorosilane	1800	156	Octadecyltrichlorosilane	1818	157	Silicon tetrachloride	1831	137	Sulphuric acid, fuming
1786	157	Hydrofluoric acid and Sulfuric acid mixture	1801	156	Octyltrichlorosilane	1819	154	Sodium aluminate, solution	1831	137	Sulphuric acid, fuming, with less than 30% free Sulphur trioxide
1786	157	Hydrofluoric acid and Sulphuric acid mixture	1802	140	Perchloric acid, with not more than 50% acid	1823	154	Caustic soda, bead	1831	137	Sulphuric acid, fuming, with not less than 30% free Sulphur trioxide
1786	157	Sulfuric acid and Hydrofluoric acid mixture	1803	153	Phenolsulfonic acid, liquid	1823	154	Caustic soda, flake	1832	137	Sulfuric acid, spent
1786	157	Sulphuric acid and Hydrofluoric acid mixture	1803	153	Phenolsulphonic acid, liquid	1823	154	Caustic soda, granular	1832	137	Sulphuric acid, spent
1786	157	Sulphuric acid and Hydrofluoric acid mixture	1804	156	Phenyltrichlorosilane	1823	154	Caustic soda, solid	1833	154	Sulfurous acid
1787	154	Hydriodic acid	1805	154	Phosphoric acid	1823	154	Sodium hydroxide, bead	1833	154	Sulphurous acid
1787	154	Hydriodic acid, solution	1805	154	Phosphoric acid, liquid	1823	154	Sodium hydroxide, dry	1834	137	Sulfuryl chloride
1788	154	Hydrobromic acid	1805	154	Phosphoric acid, solid	1823	154	Sodium hydroxide, flake	1834	137	Sulphuryl chloride
1788	154	Hydrobromic acid, solution	1805	154	Phosphoric acid, solution	1823	154	Sodium hydroxide, granular			
1789	157	Hydrochloric acid	1806	137	Phosphorus pentachloride	1823	154	Sodium hydroxide, solid			
1789	157	Hydrochloric acid, solution	1807	137	Phosphorus pentoxide	1824	154	Caustic soda, solution			
1789	157	Muriatic acid	1808	137	Phosphorus tribromide	1825	157	Sodium monoxide			
			1809	137	Phosphorus trichloride						



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1835	153	Tetramethylammonium hydroxide	1851	151	Medicine, liquid, toxic, n.o.s.	1886	156	Benzylidene chloride	1912	115	Methylene chloride and Methyl chloride mixture
1835	153	Tetramethylammonium hydroxide, solution	1854	135	Barium alloys, pyrophoric	1887	160	Bromochloromethane	1913	120	Neon, refrigerated liquid (cryogenic liquid)
1836	137	Thionyl chloride	1855	135	Calcium, metal and alloys, pyrophoric	1888	151	Chloroform	1914	130	Butyl propionates
1837	157	Thiophosphoryl chloride	1855	135	Calcium, pyrophoric	1889	157	Cyanogen bromide	1915	127	Cyclohexanone
1838	137	Titanium tetrachloride	1855	135	Calcium alloys, pyrophoric	1891	131	Ethyl bromide	1916	152	2,2'-Dichlorodiethyl ether
1839	153	Trichloroacetic acid	1856	133	Rags, oily	1892	151	ED	1916	152	Dichloroethyl ether
1840	154	Zinc chloride, solution	1857	133	Textile waste, wet	1892	151	Ethylchloroarsine	1917	129P	Ethyl acrylate, stabilized
1841	171	Acetaldehyde ammonia	1858	126	Hexafluoropropylene	1894	151	Phenylmercuric hydroxide	1918	130	Cumene
1843	141	Ammonium dinitro-o-cresolate	1858	126	Hexafluoropropylene, compressed	1895	151	Phenylmercuric nitrate	1918	130	Isopropylbenzene
1843	141	Ammonium dinitro-o-cresolate, solid	1858	126	Refrigerant gas R-1216	1897	160	Perchloroethylene	1919	129P	Methyl acrylate, stabilized
1845	120	Carbon dioxide, solid	1859	125	Silicon tetrafluoride	1897	160	Tetrachloroethylene	1920	128	Nonanes
1845	120	Dry ice	1859	125	Silicon tetrafluoride, compressed	1898	156	Acetyl iodide	1921	131P	Propyleneimine, stabilized
1846	151	Carbon tetrachloride	1860	116P	Vinyl fluoride, stabilized	1902	153	Diisooctyl acid phosphate	1922	132	Pyrrolidine
1847	153	Potassium sulfide, hydrated, with not less than 30% water of crystallization	1862	130	Ethyl crotonate	1903	153	Disinfectant, liquid, corrosive, n.o.s.	1923	135	Calcium dithionite
1847	153	Potassium sulfide, hydrated, with not less than 30% water of hydration	1863	128	Fuel, aviation, turbine engine	1903	153	Disinfectants, corrosive, liquid, n.o.s.	1923	135	Calcium hydrosulfite
1847	153	Potassium sulphide, hydrated, with not less than 30% water of crystallization	1865	131	n-Propyl nitrate	1905	154	Selenic acid	1923	135	Calcium hydrosulphite
1847	153	Potassium sulphide, hydrated, with not less than 30% water of crystallization	1866	127	Resin solution	1906	153	Acid, sludge	1928	135	Methyl magnesium bromide in Ethyl ether
1847	153	Potassium sulphide, hydrated, with not less than 30% water of crystallization	1868	134	Decaborane	1906	153	Sludge acid	1929	135	Potassium dithionite
1847	153	Potassium sulphide, hydrated, with not less than 30% water of crystallization	1869	138	Magnesium	1907	154	Soda lime, with more than 4% Sodium hydroxide	1929	135	Potassium hydrosulfite
1848	132	Propionic acid	1869	138	Magnesium, in pellets, turnings or ribbons	1908	154	Chlorite solution	1929	135	Potassium hydrosulphite
1848	132	Propionic acid, with not less than 10% and less than 90% acid	1870	138	Potassium borohydride	1908	154	Chlorite solution, with more than 5% available Chlorine	1931	171	Zinc dithionite
1849	153	Sodium sulfide, hydrated, with not less than 30% water	1871	170	Titanium hydride	1908	154	Sodium chlorite, solution, with more than 5% available Chlorine	1931	171	Zinc hydrosulfite
1849	153	Sodium sulphide, hydrated, with not less than 30% water	1872	141	Lead dioxide	1908	154	Sodium chlorite, solution, with more than 5% available Chlorine	1931	171	Zinc hydrosulphite
1851	151	Medicine, liquid, poisonous, n.o.s.	1873	143	Perchloric acid, with more than 50% but not more than 72% acid	1910	157	Calcium oxide	1932	135	Zirconium scrap
			1884	157	Barium oxide	1911	119	Diborane	1935	157	Cyanide solution, n.o.s.
			1885	153	Benzidine	1911	119	Diborane, compressed	1938	156	Bromoacetic acid
						1911	119	Diborane mixtures	1938	156	Bromoacetic acid, solution
						1912	115	Methyl chloride and Methylene chloride mixture	1939	137	Phosphorus oxybromide
									1939	137	Phosphorus oxybromide, solid

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1940	153	Thioglycolic acid	1953	119	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone C)	1955	123	Compressed gas, poisonous, n.o.s.	1961	115	Ethane-Propane mixture, refrigerated liquid
1941	171	Dibromodifluoromethane	1953	119	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone D)	1955	123	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone A)	1961	115	Propane-Ethane mixture, refrigerated liquid
1942	140	Ammonium nitrate, with not more than 0.2% combustible substances	1953	119	Compressed gas, poisonous, flammable, n.o.s.	1955	123	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone B)	1962	116P	Ethylene
1944	133	Matches, safety	1953	119	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	1955	123	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone C)	1962	116P	Ethylene, compressed
1945	133	Matches, wax "vesta"	1953	119	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	1955	123	Compressed gas, toxic, n.o.s.	1963	120	Helium, refrigerated liquid (cryogenic liquid)
1950	126	Aerosol dispensers	1953	119	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	1955	123	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone A)	1964	115	Hydrocarbon gas, compressed, n.o.s.
1950	126	Aerosols	1953	119	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	1955	123	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone B)	1964	115	Hydrocarbon gas mixture, compressed, n.o.s.
1951	120	Argon, refrigerated liquid (cryogenic liquid)	1953	119	Compressed gas, toxic, flammable, n.o.s.	1955	123	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone C)	1965	115	Hydrocarbon gas, liquefied, n.o.s.
1952	126	Carbon dioxide and Ethylene oxide mixtures, with not more than 6% Ethylene oxide	1953	119	Compressed gas, toxic, flammable, n.o.s.	1955	123	Organic phosphate compound mixed with compressed gas	1965	115	Hydrocarbon gas mixture, liquefied, n.o.s.
1952	126	Carbon dioxide and Ethylene oxide mixtures, with not more than 9% Ethylene oxide	1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)	1955	123	Organic phosphate mixed with compressed gas	1966	115	Hydrogen, refrigerated liquid (cryogenic liquid)
1952	126	Ethylene oxide and Carbon dioxide mixtures, with not more than 6% Ethylene oxide	1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	1955	123	Organic phosphorus compound mixed with compressed gas	1967	123	Insecticide gas, poisonous, n.o.s.
1952	126	Ethylene oxide and Carbon dioxide mixtures, with not more than 9% Ethylene oxide	1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	1956	126	Compressed gas, n.o.s.	1967	123	Insecticide gas, toxic, n.o.s.
1953	119	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone A)	1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	1957	115	Deuterium	1967	123	Parathion and compressed gas mixture
1953	119	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone B)	1954	115	Compressed gas, flammable, n.o.s.	1957	115	Deuterium, compressed	1968	126	Insecticide gas, n.o.s.
1953	119	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone C)	1954	115	Dispersant gas, n.o.s. (flammable)	1958	126	1,2-Dichloro-1,1,2,2-tetrafluoroethane	1969	115	Isobutane
1953	119	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone D)	1954	115	Refrigerant gas, n.o.s. (flammable)	1958	126	Dichlorotetrafluoroethane	1969	115	Isobutane mixture
1953	119	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone A)				1958	126	Refrigerant gas R-114	1970	120	Krypton, refrigerated liquid (cryogenic liquid)
1953	119	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone B)				1959	116P	1,1-Difluoroethylene	1971	115	Methane
						1959	116P	Refrigerant gas R-1132a	1971	115	Methane, compressed
						1961	115	Ethane, refrigerated liquid	1971	115	Natural gas, compressed
									1972	115	Liquefied natural gas (cryogenic liquid)
									1972	115	LNG (cryogenic liquid)
									1972	115	Methane, refrigerated liquid (cryogenic liquid)

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
1972	115	Natural gas, refrigerated liquid (cryogenic liquid)	1981	121	Rare gases and Nitrogen mixture, compressed	1993	128	Compound, tree or weed killing, liquid (flammable)	2015	143	Hydrogen peroxide, aqueous solution, stabilized, with more than 60% Hydrogen peroxide
1973	126	Chlorodifluoromethane and Chloropentafluoroethane mixture	1982	126	Refrigerant gas R-14	1993	128	Diesel fuel	2015	143	Hydrogen peroxide, stabilized
1973	126	Chloropentafluoroethane and Chlorodifluoromethane mixture	1982	126	Refrigerant gas R-14, compressed	1993	128	Flammable liquid, n.o.s.	2016	151	Ammunition, poisonous, non-explosive
1973	126	Refrigerant gas R-502	1982	126	Tetrafluoromethane	1993	128	Fuel oil	2016	151	Ammunition, toxic, non-explosive
1974	126	Bromochlorodifluoromethane	1982	126	Tetrafluoromethane, compressed	1999	130	Asphalt	2017	159	Ammunition, tear-producing, non-explosive
1974	126	Chlorodifluorobromomethane	1983	126	1-Chloro-2,2,2-trifluoroethane	1999	130	Tars, liquid	2018	152	Chloroanilines, solid
1974	126	Refrigerant gas R-12B1	1983	126	Chlorotrifluoroethane	2000	133	Celluloid, in blocks, rods, rolls,sheets, tubes, etc., except scrap	2019	152	Chloroanilines, liquid
1975	124	Dinitrogen tetroxide and Nitric oxide mixture	1983	126	Refrigerant gas R-133a	2001	133	Cobalt naphthenates, powder	2020	153	Chlorophenols, solid
1975	124	Nitric oxide and Dinitrogen tetroxide mixture	1984	126	Refrigerant gas R-23	2002	135	Celluloid, scrap	2021	153	Chlorophenols, liquid
1975	124	Nitric oxide and Nitrogen dioxide mixture	1984	126	Trifluoromethane	2003	135	Metal alkyls, water-reactive, n.o.s.	2022	153	Cresylic acid
1975	124	Nitric oxide and Nitrogen tetroxide mixture	1986	131	Alcohols, flammable, poisonous, n.o.s.	2003	135	Metal aryls, water-reactive, n.o.s.	2023	131P	1-Chloro-2,3-epoxypropane
1975	124	Nitrogen dioxide and Nitric oxide mixture	1986	131	Alcohols, flammable, toxic, n.o.s.	2004	135	Magnesium diamide	2023	131P	Epichlorohydrin
1975	124	Nitrogen tetroxide and Nitric oxide mixture	1986	131	Alcohols, poisonous, n.o.s.	2005	135	Magnesium diphenyl	2024	151	Mercury compound, liquid, n.o.s.
1975	124	Nitrogen tetroxide and Nitric oxide mixture	1986	131	Alcohols, toxic, n.o.s.	2006	135	Plastic, nitrocellulose-based, spontaneously combustible, n.o.s.	2025	151	Mercury compound, solid, n.o.s.
1975	124	Nitrogen tetroxide and Nitric oxide mixture	1987	127	Alcohols, n.o.s.	2006	135	Plastics, nitrocellulose-based, self-heating, n.o.s.	2026	151	Phenylmercuric compound, n.o.s.
1976	126	Octafluorocyclobutane	1988	131	Aldehydes, flammable, poisonous, n.o.s.	2008	135	Zirconium powder, dry	2027	151	Sodium arsenite, solid
1976	126	Refrigerant gas RC-318	1988	131	Aldehydes, flammable, toxic, n.o.s.	2009	135	Zirconium, dry, finished sheets, strips or coiled wire	2028	153	Bombs, smoke, non-explosive, with corrosive liquid, without initiating device
1977	120	Nitrogen, refrigerated liquid (cryogenic liquid)	1988	131	Aldehydes, poisonous, n.o.s.	2010	138	Magnesium hydride	2029	132	Hydrazine, anhydrous
1978	115	Propane	1989	129	Aldehydes, toxic, n.o.s.	2011	139	Magnesium phosphide	2029	132	Hydrazine, aqueous solutions, with more than 64% Hydrazine
1978	115	Propane mixture	1990	129	Aldehydes, n.o.s.	2012	139	Potassium phosphide	2030	153	Hydrazine, aqueous solution, with more than 37% Hydrazine
1979	121	Rare gases mixture, compressed	1991	131P	Benzaldehyde	2013	139	Strontium phosphide	2030	153	Hydrazine, aqueous solution, with not less than 37% but not more than 64% Hydrazine
1980	121	Oxygen and Rare gases mixture, compressed	1992	131	Chloroprene, stabilized	2014	140	Hydrogen peroxide, aqueous solution, with not less than 20% but not more than 60% Hydrogen peroxide (stabilized as necessary)	2030	153	Hydrazine hydrate
1980	121	Rare gases and Oxygen mixture, compressed	1992	131	Flammable liquid, poisonous, n.o.s.						
1981	121	Nitrogen and Rare gases mixture, compressed	1992	131	Flammable liquid, toxic, n.o.s.						
			1993	128	Combustible liquid, n.o.s.						
			1993	128	Compound, cleaning liquid (flammable)						

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2031	157	Nitric acid, other than red fuming, with more than 70% nitric acid	2053	129	Methylamyl alcohol	2076	153	Cresols, liquid	2201	122	Nitrous oxide, refrigerated liquid
2031	157	Nitric acid, other than red fuming, with not more than 70% nitric acid	2053	129	Methyl isobutyl carbinol	2076	153	Cresols, solid	2202	117	Hydrogen selenide, anhydrous
2032	157	Nitric acid, fuming	2053	129	M.I.B.C.	2077	153	alpha-Naphthylamine	2203	116	Silane
2032	157	Nitric acid, red fuming	2054	132	Morpholine	2077	153	Naphthylamine (alpha)	2203	116	Silane, compressed
2033	154	Potassium monoxide	2055	128P	Styrene monomer, stabilized	2078	156	Toluene diisocyanate	2204	119	Carbonyl sulfide
2034	115	Hydrogen and Methane mixture, compressed	2056	127	Tetrahydrofuran	2079	154	Diethylenetriamine	2204	119	Carbonyl sulphide
2034	115	Methane and Hydrogen mixture, compressed	2057	128	Tripropylene	2186	125	Hydrogen chloride, refrigerated liquid	2205	153	Adiponitrile
2035	115	Refrigerant gas R-143a	2058	129	Valeraldehyde	2187	120	Carbon dioxide, refrigerated liquid	2206	155	Isocyanate solution, poisonous, n.o.s.
2035	115	1,1,1-Trifluoroethane	2059	127	Nitrocellulose, solution, flammable	2188	119	Arsine	2206	155	Isocyanate solution, toxic, n.o.s.
2035	115	Trifluoroethane, compressed	2059	127	Nitrocellulose, solution, in a flammable liquid	2188	119	SA	2206	155	Isocyanate solutions, n.o.s.
2036	121	Xenon	2067	140	Ammonium nitrate fertilizers	2189	119	Dichlorosilane	2206	155	Isocyanates, n.o.s.
2036	121	Xenon, compressed	2068	140	Ammonium nitrate fertilizers, with Calcium carbonate	2190	124	Oxygen difluoride	2206	155	Isocyanates, poisonous, n.o.s.
2037	115	Gas cartridges	2069	140	Ammonium nitrate fertilizers, with Ammonium sulfate	2190	124	Oxygen difluoride, compressed	2206	155	Isocyanates, toxic, n.o.s.
2037	115	Receptacles, small, containing gas	2069	140	Ammonium nitrate fertilizers, with Ammonium sulphate	2191	123	Sulfuryl fluoride	2208	140	Bleaching powder
2038	152	Dinitrotoluenes	2069	140	Ammonium nitrate fertilizers, with Ammonium sulphate	2191	123	Sulphuryl fluoride	2208	140	Calcium hypochlorite mixture, dry, with more than 10% but not more than 39% available Chlorine
2038	152	Dinitrotoluenes, liquid	2069	140	Ammonium nitrate mixed fertilizers	2192	119	Germane	2209	132	Formaldehyde, solutions (Formalin) (corrosive)
2038	152	Dinitrotoluenes, solid	2070	143	Ammonium nitrate fertilizers, with Phosphate or Potash	2193	126	Hexafluoroethane	2210	135	Maneb
2044	115	2,2-Dimethylpropane	2071	140	Ammonium nitrate fertilizer, with not more than 0.4% combustible material	2193	126	Hexafluoroethane, compressed	2210	135	Maneb preparation, with not less than 60% Maneb
2045	130	Isobutyl aldehyde	2071	140	Ammonium nitrate fertilizer	2193	126	Refrigerant gas R-116	2211	133	Polymeric beads, expandable
2045	130	Isobutyraldehyde	2071	140	Ammonium nitrate fertilizers	2193	126	Refrigerant gas R-116, compressed	2211	133	Polystyrene beads, expandable
2046	130	Cymenes	2072	140	Ammonium nitrate fertilizers, n.o.s.	2194	125	Selenium hexafluoride	2212	171	Asbestos
2047	129	Dichloropropenes	2072	140	Ammonium nitrate fertilizers	2195	125	Tellurium hexafluoride	2212	171	Asbestos, blue
2048	130	Dicyclopentadiene	2073	125	Ammonia, solution, with more than 35% but not more than 50% Ammonia	2196	125	Tungsten hexafluoride	2212	171	Asbestos, brown
2049	130	Diethylbenzene	2074	153P	Acrylamide	2197	125	Hydrogen iodide, anhydrous	2212	171	Blue asbestos
2050	128	Diisobutylene, isomeric compounds	2074	153P	Acrylamide, solid	2198	125	Phosphorus pentafluoride	2212	171	Brown asbestos
2051	132	2-Dimethylaminoethanol	2075	153	Chloral, anhydrous, stabilized	2198	125	Phosphorus pentafluoride, compressed	2213	133	Paraformaldehyde
2051	132	Dimethylethanolamine	2076	153	Cresols	2199	119	Phosphine	2214	156	Phthalic anhydride
2052	128	Dipentene				2200	116P	Propadiene, stabilized			

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2215	156	Maleic anhydride	2242	128	Cycloheptene	2269	153	3,3'-Iminodipropylamine	2297	128	Methylcyclohexanone
2215	156	Maleic anhydride, molten	2243	130	Cyclohexyl acetate	2270	132	Ethylamine, aqueous solution, with not less than 50% but not more than 70% Ethylamine	2298	128	Methylcyclopentane
2216	171	Fish meal, stabilized	2244	129	Cyclopentanol				2299	155	Methyl dichloroacetate
2216	171	Fish scrap, stabilized	2245	128	Cyclopentanone				2300	153	2-Methyl-5-ethylpyridine
2217	135	Seed cake, with not more than 1.5% oil and not more than 11% moisture	2246	128	Cyclopentene	2271	128	Ethyl amyl ketone	2301	128	2-Methylfuran
			2247	128	n-Decane	2272	153	N-Ethylaniline	2302	127	5-Methylhexan-2-one
2218	132P	Acrylic acid, stabilized	2248	132	Di-n-butylamine	2273	153	2-Ethylaniline	2303	128	Isopropenylbenzene
2219	129	Allyl glycidyl ether	2249	131	Dichlorodimethyl ether, symmetrical	2274	153	N-Ethyl-N-benzylaniline	2304	133	Naphthalene, molten
2222	128	Anisole	2250	156	Dichlorophenyl isocyanates	2275	129	2-Ethylbutanol	2305	153	Nitrobenzenesulfonic acid
2224	152	Benzonitrile	2251	128P	Bicyclo[2.2.1]hepta-2,5-diene, stabilized	2276	132	2-Ethylhexylamine	2305	153	Nitrobenzenesulphonic acid
2225	156	Benzenesulfonyl chloride	2251	128P	2,5-Norbornadiene, stabilized	2277	130P	Ethyl methacrylate	2306	152	Nitrobenzotrifluorides
2225	156	Benzenesulphonyl chloride	2252	127	1,2-Dimethoxyethane	2277	130P	Ethyl methacrylate, stabilized	2306	152	Nitrobenzotrifluorides, liquid
2226	156	Benzotrichloride	2253	153	N,N-Dimethylaniline	2278	128	n-Heptene	2307	152	3-Nitro-4-chlorobenzotrifluoride
2227	130P	n-Butyl methacrylate, stabilized	2254	133	Matches, fusee	2279	151	Hexachlorobutadiene	2308	157	Nitrosylsulfuric acid
2232	153	Chloroacetaldehyde	2256	130	Cyclohexene	2280	153	Hexamethylenediamine, solid	2308	157	Nitrosylsulfuric acid, liquid
2232	153	2-Chloroethanal	2257	138	Potassium	2281	156	Hexamethylene diisocyanate	2308	157	Nitrosylsulfuric acid, solid
2233	152	Chloroanisidines	2257	138	Potassium, metal	2282	129	Hexanols	2308	157	Nitrosylsulphuric acid
2234	130	Chlorobenzotrifluorides	2258	132	1,2-Propylenediamine	2283	130P	Isobutyl methacrylate, stabilized	2308	157	Nitrosylsulphuric acid, liquid
2235	153	Chlorobenzyl chlorides	2258	132	1,3-Propylenediamine	2284	131	Isobutyronitrile	2308	157	Nitrosylsulphuric acid, solid
2235	153	Chlorobenzyl chlorides, liquid	2259	153	Triethylenetetramine	2285	156	Isocyanatobenzotrifluorides	2309	128P	Octadiene
2236	156	3-Chloro-4-methylphenyl isocyanate	2260	132	Tripropylamine	2286	128	Pentamethylheptane	2310	131	Pentan-2,4-dione
2236	156	3-Chloro-4-methylphenyl isocyanate, liquid	2261	153	Xylenols	2287	128	Isoheptenes	2310	131	2,4-Pentanedione
			2261	153	Xylenols, solid	2288	128	Isohexenes	2310	131	Pentane-2,4-dione
2237	153	Chloronitroanilines	2262	156	Dimethylcarbamoyl chloride	2289	153	Isophoronediamine	2311	153	Phenetidines
2238	129	Chlorotoluenes	2263	128	Dimethylcyclohexanes	2290	156	IPDI	2312	153	Phenol, molten
2239	153	Chlorotoluidines	2264	132	N,N-Dimethylcyclohexylamine	2290	156	Isophorone diisocyanate	2313	129	Picolines
2239	153	Chlorotoluidines, liquid	2264	132	Dimethylcyclohexylamine	2291	151	Lead compound, soluble, n.o.s.	2315	171	Articles containing Polychlorinated biphenyls (PCB)
2239	153	Chlorotoluidines, solid	2265	129	N,N-Dimethylformamide	2293	128	4-Methoxy-4-methylpentan-2-one	2315	171	PCB
2240	154	Chromosulfuric acid	2266	132	Dimethyl-N-propylamine	2294	153	N-Methylaniline	2315	171	Polychlorinated biphenyls
2240	154	Chromosulphuric acid	2267	156	Dimethyl thiophosphoryl chloride	2295	155	Methyl chloroacetate	2315	171	Polychlorinated biphenyls, liquid
2241	128	Cycloheptane				2296	128	Methylcyclohexane			



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2315	171	Polychlorinated biphenyls, solid	2337	131	Phenyl mercaptan	2368	128	Pinene (alpha)	2396	131P	Methacrylaldehyde, stabilized
2316	157	Sodium cuprocyanide, solid	2338	127	Benzotrifluoride	2370	128	1-Hexene	2397	127	3-Methylbutan-2-one
2317	157	Sodium cuprocyanide, solution	2339	130	2-Bromobutane	2371	128	Isopentenenes	2398	127	Methyl tert-butyl ether
2318	135	Sodium hydrosulfide, solid, with less than 25% water of crystallization	2340	130	2-Bromoethyl ethyl ether	2372	129	1,2-Di-(dimethylamino)ethane	2399	132	1-Methylpiperidine
2318	135	Sodium hydrosulfide, with less than 25% water of crystallization	2341	130	1-Bromo-3-methylbutane	2373	127	Diethoxymethane	2400	130	Methyl isovalerate
2318	135	Sodium hydrosulphide, solid, with less than 25% water of crystallization	2342	130	Bromomethylpropanes	2374	127	3,3-Diethoxypropene	2401	132	Piperidine
2318	135	Sodium hydrosulphide, with less than 25% water of crystallization	2343	130	2-Bromopentane	2375	129	Diethyl sulfide	2402	130	Propanethiols
2319	128	Terpene hydrocarbons, n.o.s.	2344	129	2-Bromopropane	2375	129	Diethyl sulphide	2403	129P	Isopropenyl acetate
2320	153	Tetraethylenepentamine	2344	129	Bromopropanes	2376	127	2,3-Dihydropyran	2404	131	Propionitrile
2321	153	Trichlorobenzenes, liquid	2345	130	3-Bromopropyne	2377	127	1,1-Dimethoxyethane	2405	129	Isopropyl butyrate
2322	152	Trichlorobutene	2346	127	Butanedione	2378	131	2-Dimethylaminoacetonitrile	2406	127	Isopropyl isobutyrate
2323	130	Triethyl phosphite	2346	127	Diacetyl	2379	132	1,3-Dimethylbutylamine	2407	155	Isopropyl chloroformate
2324	128	Triisobutylene	2347	130	Butyl mercaptan	2380	127	Dimethyldiethoxysilane	2409	129	Isopropyl propionate
2325	129	1,3,5-Trimethylbenzene	2348	129P	Butyl acrylates, stabilized	2381	130	Dimethyl disulfide	2410	129	1,2,3,6-Tetrahydropyridine
2326	153	Trimethylcyclohexylamine	2350	127	Butyl methyl ether	2381	130	Dimethyl disulphide	2410	129	1,2,5,6-Tetrahydropyridine
2327	153	Trimethylhexamethylenediaines	2351	129	Butyl nitrites	2382	131	1,2-Dimethylhydrazine	2411	131	Butyronitrile
2328	156	Trimethylhexamethylene diisocyanate	2352	127P	Butyl vinyl ether, stabilized	2382	131	Dimethylhydrazine, symmetrical	2412	130	Tetrahydrothiophene
2329	130	Trimethyl phosphite	2353	132	Butyryl chloride	2383	132	Dipropylamine	2413	128	Tetrapropyl orthotitanate
2330	128	Undecane	2354	131	Chloromethyl ethyl ether	2384	127	Di-n-propyl ether	2414	130	Thiophene
2331	154	Zinc chloride, anhydrous	2356	129	2-Chloropropane	2384	127	Dipropyl ether	2416	129	Trimethyl borate
2332	129	Acetaldehyde oxime	2357	132	Cyclohexylamine	2385	129	Ethyl isobutyrate	2417	125	Carbonyl fluoride
2333	131	Allyl acetate	2358	128P	Cyclooctatetraene	2386	132	1-Ethylpiperidine	2417	125	Carbonyl fluoride, compressed
2334	131	Allylamine	2359	132	Diallylamine	2387	130	Fluorobenzene	2418	125	Sulfur tetrafluoride
2335	131	Allyl ethyl ether	2360	131P	Diallyl ether	2388	130	Fluorotoluenes	2418	125	Sulphur tetrafluoride
2336	131	Allyl formate	2361	132	Diisobutylamine	2389	128	Furan	2419	116	Bromotrifluoroethylene
			2362	130	1,1-Dichloroethane	2390	129	2-Iodobutane	2420	125	Hexafluoroacetone
			2363	129	Ethyl mercaptan	2391	129	Iodomethylpropanes	2421	124	Nitrogen trioxide
			2364	128	n-Propyl benzene	2392	129	Iodopropanes	2422	126	Octafluorobut-2-ene
			2366	128	Diethyl carbonate	2393	129	Isobutyl formate	2422	126	Refrigerant gas R-1318
			2367	130	alpha-Methylvaleraldehyde	2394	129	Isobutyl propionate	2424	126	Octafluoropropane
			2367	130	Methyl valeraldehyde (alpha)	2395	132	Isobutyryl chloride	2424	126	Refrigerant gas R-218
			2368	128	alpha-Pinene						

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2426	140	Ammonium nitrate, liquid (hot concentrated solution)	2444	137	Vanadium tetrachloride	2469	140	Zinc bromate	2498	129	1,2,3,6-Tetrahydrobenzaldehyde
2427	140	Potassium chlorate, aqueous solution	2445	135	Lithium alkyls	2470	152	Phenylacetoneitrile, liquid	2501	152	1-Aziridinyl phosphine oxide (Tris)
2427	140	Potassium chlorate, solution	2445	135	Lithium alkyls, liquid	2471	154	Osmium tetroxide	2501	152	Tri-(1-aziridinyl)phosphine oxide, solution
2428	140	Sodium chlorate, aqueous solution	2446	153	Nitrocresols	2473	154	Sodium arsanilate	2501	152	Tris-(1-aziridinyl)phosphine oxide, solution
2429	140	Calcium chlorate, aqueous solution	2446	153	Nitrocresols, solid	2474	157	Thiophosgene	2502	132	Valeryl chloride
2429	140	Calcium chlorate, solution	2447	136	Phosphorus, white, molten	2475	157	Vanadium trichloride	2503	137	Zirconium tetrachloride
2430	153	Alkyl phenols, solid, n.o.s. (including C2-C12 homologues)	2447	136	White phosphorus, molten	2477	131	Methyl isothiocyanate	2504	159	Acetylene tetrabromide
2431	153	Anisidines	2447	136	Yellow phosphorus, molten	2478	155	Isocyanate solution, flammable, poisonous, n.o.s.	2504	159	Tetrabromoethane
2431	153	Anisidines, liquid	2448	133	Sulfur, molten	2478	155	Isocyanate solution, flammable, toxic, n.o.s.	2505	154	Ammonium fluoride
2431	153	Anisidines, solid	2448	133	Sulphur, molten	2478	155	Isocyanate solutions, n.o.s.	2506	154	Ammonium hydrogen sulfate
2432	153	N,N-Diethylaniline	2451	122	Nitrogen trifluoride	2478	155	Isocyanates, flammable, poisonous, n.o.s.	2506	154	Ammonium hydrogen sulphate
2433	152	Chloronitrotoluenes	2451	122	Nitrogen trifluoride, compressed	2478	155	Isocyanates, flammable, toxic, n.o.s.	2507	154	Chloroplatinic acid, solid
2433	152	Chloronitrotoluenes, liquid	2452	116P	Ethylacetylene, stabilized	2478	155	Isocyanates, n.o.s.	2508	156	Molybdenum pentachloride
2433	152	Chloronitrotoluenes, solid	2453	115	Ethyl fluoride	2480	155	Methyl isocyanate	2509	154	Potassium hydrogen sulfate
2434	156	Dibenzylidichlorosilane	2453	115	Refrigerant gas R-161	2481	155	Ethyl isocyanate	2509	154	Potassium hydrogen sulphate
2435	156	Ethylphenyldichlorosilane	2454	115	Methyl fluoride	2482	155	n-Propyl isocyanate	2511	153	2-Chloropropionic acid
2436	129	Thioacetic acid	2454	115	Refrigerant gas R-41	2483	155	Isopropyl isocyanate	2511	153	2-Chloropropionic acid, solid
2437	156	Methylphenyldichlorosilane	2455	116	Methyl nitrite	2484	155	tert-Butyl isocyanate	2511	153	2-Chloropropionic acid, solution
2438	132	Trimethylacetyl chloride	2456	130P	2-Chloropropene	2485	155	n-Butyl isocyanate	2512	152	Aminophenols
2439	154	Sodium hydrogendifluoride	2457	128	2,3-Dimethylbutane	2486	155	Isobutyl isocyanate	2513	156	Bromoacetyl bromide
2440	154	Stannic chloride, pentahydrate	2458	130	Hexadiene	2487	155	Phenyl isocyanate	2514	130	Bromobenzene
2440	154	Tin tetrachloride, pentahydrate	2459	128	2-Methyl-1-butene	2488	155	Cyclohexyl isocyanate	2515	159	Bromoform
2441	135	Titanium trichloride, pyrophoric	2460	128	2-Methyl-2-butene	2490	153	Dichloroisopropyl ether	2516	151	Carbon tetrabromide
2441	135	Titanium trichloride mixture, pyrophoric	2461	128	Methylpentadiene	2491	153	Ethanolamine	2517	115	1-Chloro-1,1-difluoroethane
2442	156	Trichloroacetyl chloride	2463	138	Aluminum hydride	2491	153	Ethanolamine, solution	2517	115	Chlorodifluoroethanes
2443	137	Vanadium oxytrichloride	2464	141	Beryllium nitrate	2491	153	Monoethanolamine	2517	115	Difluorochloroethanes
			2465	140	Dichloroisocyanuric acid, dry	2493	132	Hexamethyleneimine	2517	115	Refrigerant gas R-142b
			2465	140	Dichloroisocyanuric acid salts	2495	144	Iodine pentafluoride	2518	153	1,5,9-Cyclododecatriene
			2465	140	Sodium dichloroisocyanurate	2496	156	Propionic anhydride	2520	130P	Cyclooctadienes
			2465	140	Sodium dichloro-striazinetrione						
			2466	143	Potassium superoxide						
			2468	140	Trichloroisocyanuric acid, dry						



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2521	131P	Diketene, stabilized	2557	133	Nitrocellulose	2583	153	Alkyl sulfonic acids, solid, with more than 5% free Sulfuric acid	2586	153	Aryl sulfonic acids, liquid, with not more than 5% free Sulfuric acid
2522	153P	2-Dimethylaminoethyl methacrylate	2557	133	Nitrocellulose mixture, without pigment	2583	153	Alkyl sulphonic acids, solid, with more than 5% free Sulphuric acid	2586	153	Aryl sulphonic acids, liquid, with not more than 5% free Sulphuric acid
2522	153P	Dimethylaminoethyl methacrylate	2557	133	Nitrocellulose mixture, without plasticizer	2583	153	Aryl sulfonic acids, solid, with more than 5% free Sulfuric acid	2587	153	Benzoquinone
2524	129	Ethyl orthoformate	2557	133	Nitrocellulose mixture, with pigment	2583	153	Aryl sulphonic acids, solid, with more than 5% free Sulphuric acid	2588	151	Pesticide, solid, poisonous
2525	156	Ethyl oxalate	2557	133	Nitrocellulose mixture, with pigment and plasticizer	2584	153	Alkyl sulfonic acids, liquid, with more than 5% free Sulfuric acid	2588	151	Pesticide, solid, poisonous, n.o.s.
2526	132	Furfurylamine	2557	133	Nitrocellulose mixture, with plasticizer	2584	153	Alkyl sulphonic acids, liquid, with more than 5% free Sulphuric acid	2588	151	Pesticide, solid, toxic, n.o.s.
2527	129P	Isobutyl acrylate, stabilized	2558	131	Epibromohydrin	2584	153	Aryl sulfonic acids, liquid, with more than 5% free Sulfuric acid	2589	155	Vinyl chloroacetate
2528	130	Isobutyl isobutyrate	2560	129	2-Methylpentan-2-ol	2584	153	Aryl sulphonic acids, liquid, with more than 5% free Sulphuric acid	2590	171	Asbestos, white
2529	132	Isobutyric acid	2561	128	3-Methyl-1-butene	2585	153	Alkyl sulfonic acids, solid, with not more than 5% free Sulfuric acid	2590	171	White asbestos
2531	153P	Methacrylic acid, stabilized	2564	153	Trichloroacetic acid, solution	2585	153	Alkyl sulphonic acids, solid, with not more than 5% free Sulphuric acid	2591	120	Xenon, refrigerated liquid (cryogenic liquid)
2533	156	Methyl trichloroacetate	2565	153	Dicyclohexylamine	2585	153	Alkyl sulfonic acids, liquid, with not more than 5% free Sulfuric acid	2599	126	Chlorotrifluoromethane and Trifluoromethane azeotropic mixture with approximately 60% Chlorotrifluoromethane
2534	119	Methylchlorosilane	2567	154	Sodium pentachlorophenate	2586	153	Alkyl sulfonic acids, liquid, with not more than 5% free Sulfuric acid	2599	126	Refrigerant gas R-13 and Refrigerant gas R-23 azeotropic mixture with 60% Refrigerant gas R-13
2535	132	4-Methylmorpholine	2570	154	Cadmium compound	2586	153	Alkyl sulphonic acids, solid, with not more than 5% free Sulphuric acid	2599	126	Refrigerant gas R-23 and Refrigerant gas R-13 azeotropic mixture with 60% Refrigerant gas R-13
2535	132	N-Methylmorpholine	2571	156	Alkylsulfuric acids	2586	153	Alkyl sulfonic acids, solid, with not more than 5% free Sulfuric acid	2599	126	Refrigerant gas R-503 (azeotropic mixture of Refrigerant gas R-13 and Refrigerant gas R-23 with approximately 60% Refrigerant gas R-13)
2535	132	Methylmorpholine	2571	156	Ethylsulfuric acid	2586	153	Alkyl sulfonic acids, liquid, with not more than 5% free Sulfuric acid	2599	126	Trifluoromethane and Chlorotrifluoromethane azeotropic mixture with approximately 60% Chlorotrifluoromethane
2536	127	Methyltetrahydrofuran	2571	156	Ethylsulphuric acid	2586	153	Alkyl sulfonic acids, liquid, with not more than 5% free Sulfuric acid	2600	119	Carbon monoxide and Hydrogen mixture, compressed
2538	133	Nitronaphthalene	2572	153	Phenylhydrazine						
2541	128	Terpinolene	2573	141	Thallium chlorate						
2542	153	Tributylamine	2574	151	Tricresyl phosphate						
2545	135	Hafnium powder, dry	2576	137	Phosphorus oxybromide, molten						
2546	135	Titanium powder, dry	2577	156	Phenylacetyl chloride						
2547	143	Sodium superoxide	2578	157	Phosphorus trioxide						
2548	124	Chlorine pentafluoride	2579	153	Piperazine						
2552	151	Hexafluoroacetone hydrate	2580	154	Aluminum bromide, solution						
2552	151	Hexafluoroacetone hydrate, liquid	2581	154	Aluminum chloride, solution						
2554	130P	Methylallyl chloride	2582	154	Ferric chloride, solution						
2555	113	Nitrocellulose with water, not less than 25% water									
2556	113	Nitrocellulose with alcohol									
2556	113	Nitrocellulose with not less than 25% alcohol									

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2600	119	Hydrogen and Carbon monoxide mixture, compressed	2615	127	Ethyl propyl ether	2657	153	Selenium disulphide	2680	154	Lithium hydroxide, solid
2601	115	Cyclobutane	2616	129	Triisopropyl borate	2659	151	Sodium chloroacetate	2681	154	Caesium hydroxide, solution
2602	126	Dichlorodifluoromethane and Difluoroethane azeotropic mixture with approximately 74% Dichlorodifluoromethane	2617	129	Methylcyclohexanols	2660	153	Mononitrotoluidines	2681	154	Cesium hydroxide, solution
2602	126	Difluoroethane and Dichlorodifluoromethane azeotropic mixture with approximately 74% Dichlorodifluoromethane	2618	130P	Vinyltoluenes, stabilized	2660	153	Nitrotoluidines (mono)	2682	157	Caesium hydroxide
2602	126	Refrigerant gas R-12 and Refrigerant gas R-152a azeotropic mixture with 74% Refrigerant gas R-12	2619	132	Benzyl dimethylamine	2661	153	Hexachloroacetone	2682	157	Cesium hydroxide
2602	126	Refrigerant gas R-152a and Refrigerant gas R-12 azeotropic mixture with 74% Refrigerant gas R-12	2620	130	Amyl butyrates	2662	153	Hydroquinone	2683	132	Ammonium sulfide, solution
2602	126	Refrigerant gas R-500 (azeotropic mixture of Refrigerant gas R-12 and Refrigerant gas R-152a with approximately 74% Refrigerant gas R-12)	2621	127	Acetyl methyl carbinol	2662	153	Hydroquinone, solid	2683	132	Ammonium sulphide, solution
2603	131	Cycloheptatriene	2622	131P	Glycidaldehyde	2664	160	Dibromomethane	2684	132	3-Diethylaminopropylamine
2604	132	Boron trifluoride diethyl etherate	2623	133	Firelighters, solid, with flammable liquid	2667	152	Butyltoluenes	2684	132	Diethylaminopropylamine
2605	155	Methoxymethyl isocyanate	2624	138	Magnesium silicide	2668	131	Chloroacetonitrile	2685	132	N,N-Diethylethylenediamine
2606	155	Methyl orthosilicate	2626	140	Chloric acid, aqueous solution, with not more than 10% Chloric acid	2669	152	Chlorocresols	2686	132	2-Diethylaminoethanol
2607	129P	Acrolein dimer, stabilized	2627	140	Nitrites, inorganic, n.o.s.	2669	152	Chlorocresols, liquid	2686	132	Diethylaminoethanol
2608	129	Nitropropanes	2628	151	Potassium fluoroacetate	2669	152	Chlorocresols, solid	2687	133	Dicyclohexylammonium nitrite
2609	156	Triallyl borate	2629	151	Sodium fluoroacetate	2669	152	Chlorocresols, solution	2688	159	1-Bromo-3-chloropropane
2610	132	Triallylamine	2630	151	Selenates	2670	157	Cyanuric chloride	2688	159	1-Chloro-3-bromopropane
2611	131	Propylene chlorohydrin	2630	151	Selenites	2671	153	Aminopyridines	2689	153	Glycerol
2612	127	Methyl propyl ether	2642	154	Fluoroacetic acid	2672	154	Ammonia, solution, with more than 10% but not more than 35% Ammonia			alphamonochlorohydrin
2614	129	Methallyl alcohol	2643	155	Methyl bromoacetate	2672	154	Ammonium hydroxide	2690	152	N,n-Butylimidazole
			2644	151	Methyl iodide	2672	154	Ammonium hydroxide, with more than 10% but not more than 35% Ammonia	2691	137	Phosphorus pentabromide
			2645	153	Phenacyl bromide	2673	151	2-Amino-4-chlorophenol	2692	157	Boron tribromide
			2646	151	Hexachlorocyclopentadiene	2674	154	Sodium fluorosilicate	2693	154	Bisulfites, aqueous solution, n.o.s.
			2647	153	Malononitrile	2674	154	Sodium silicofluoride	2693	154	Bisulfites, inorganic, aqueous solution, n.o.s.
			2648	154	1,2-Dibromobutan-3-one	2676	119	Stibine	2693	154	Bisulphites, aqueous solution, n.o.s.
			2649	153	1,3-Dichloroacetone	2677	154	Rubidium hydroxide, solution	2693	154	Bisulphites, inorganic, aqueous solution, n.o.s.
			2650	153	1,1-Dichloro-1-nitroethane	2678	154	Rubidium hydroxide	2698	156	Tetrahydrophthalic anhydrides
			2651	153	4,4'-Diaminodiphenylmethane	2678	154	Rubidium hydroxide, solid	2699	154	Trifluoroacetic acid
			2653	156	Benzyl iodide	2679	154	Lithium hydroxide, solution	2705	153P	1-Pentol
			2655	151	Potassium fluorosilicate	2680	154	Lithium hydroxide	2707	127	Dimethyldioxanes
			2655	151	Potassium silicofluoride	2680	154	Lithium hydroxide, monohydrate	2709	128	Butylbenzenes
			2656	154	Quinoline				2710	128	Dipropyl ketone
			2657	153	Selenium disulfide						

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2713	153	Acridine	2734	132	Polyamines, liquid, corrosive, flammable, n.o.s.	2757	151	Carbamate pesticide, solid, poisonous	2772	131	Dithiocarbamate pesticide, liquid, flammable, toxic
2714	133	Zinc resinate	2735	153	Alkylamines, n.o.s.	2757	151	Carbamate pesticide, solid, toxic	2772	131	Thiocarbamate pesticide, liquid, flammable, poisonous
2715	133	Aluminum resinate	2735	153	Amines, liquid, corrosive, n.o.s.	2758	131	Carbamate pesticide, liquid, flammable, poisonous	2772	131	Thiocarbamate pesticide, liquid, flammable, toxic
2716	153	1,4-Butynediol	2735	153	Polyalkylamines, n.o.s.	2758	131	Carbamate pesticide, liquid, flammable, toxic	2775	151	Copper based pesticide, solid, poisonous
2717	133	Camphor	2735	153	Polyamines, liquid, corrosive, n.o.s.	2759	151	Arsenical pesticide, solid, poisonous	2775	151	Copper based pesticide, solid, toxic
2717	133	Camphor, synthetic	2738	153	N-Butylaniline	2759	151	Arsenical pesticide, solid, toxic	2776	131	Copper based pesticide, liquid, flammable, poisonous
2719	141	Barium bromate	2739	156	Butyric anhydride	2760	131	Arsenical pesticide, liquid, flammable, poisonous	2776	131	Copper based pesticide, liquid, flammable, toxic
2720	141	Chromium nitrate	2740	155	n-Propyl chloroformate	2760	131	Arsenical pesticide, liquid, flammable, toxic	2777	151	Mercury based pesticide, solid, poisonous
2721	141	Copper chlorate	2741	141	Barium hypochlorite, with more than 22% available Chlorine	2761	151	Organochlorine pesticide, solid, poisonous	2777	151	Mercury based pesticide, solid, toxic
2722	140	Lithium nitrate	2742	155	sec-Butyl chloroformate	2761	151	Organochlorine pesticide, solid, toxic	2778	131	Mercury based pesticide, liquid, flammable, poisonous
2723	140	Magnesium chlorate	2742	155	Chloroformates, n.o.s.	2762	131	Organochlorine pesticide, liquid, flammable, poisonous	2778	131	Mercury based pesticide, liquid, flammable, toxic
2724	140	Manganese nitrate	2742	155	Chloroformates, poisonous, corrosive, flammable, n.o.s.	2762	131	Organochlorine pesticide, liquid, flammable, toxic	2779	153	Substituted nitrophenol pesticide, solid, poisonous
2725	140	Nickel nitrate	2742	155	Chloroformates, toxic, corrosive, flammable, n.o.s.	2763	151	Triazine pesticide, solid, poisonous	2779	153	Substituted nitrophenol pesticide, solid, toxic
2726	140	Nickel nitrite	2742	155	Isobutyl chloroformate	2763	151	Triazine pesticide, solid, toxic	2780	131	Substituted nitrophenol pesticide, liquid, flammable, poisonous
2727	141	Thallium nitrate	2743	155	n-Butyl chloroformate	2764	131	Triazine pesticide, liquid, flammable, poisonous	2780	131	Substituted nitrophenol pesticide, liquid, flammable, toxic
2728	140	Zirconium nitrate	2744	155	Cyclobutyl chloroformate	2764	131	Triazine pesticide, liquid, flammable, toxic	2781	151	Bipyridilium pesticide, solid, poisonous
2729	152	Hexachlorobenzene	2745	157	Chloromethyl chloroformate	2771	151	Dithiocarbamate pesticide, solid, poisonous	2781	151	Bipyridilium pesticide, solid, toxic
2730	152	Nitroanisoles	2746	156	Phenyl chloroformate	2771	151	Thiocarbamate pesticide, solid, poisonous	2782	131	Bipyridilium pesticide, liquid, flammable, poisonous
2730	152	Nitroanisoles, liquid	2747	156	tert-Butylcyclohexyl chloroformate	2771	151	Thiocarbamate pesticide, solid, toxic			
2730	152	Nitroanisoles, solid	2748	156	2-Ethylhexyl chloroformate	2772	131	Dithiocarbamate pesticide, liquid, flammable, poisonous			
2732	152	Nitrobromobenzenes	2749	130	Tetramethylsilane						
2732	152	Nitrobromobenzenes, liquid	2750	153	1,3-Dichloropropanol-2						
2732	152	Nitrobromobenzenes, solid	2751	155	Diethylthiophosphoryl chloride						
2733	132	Alkylamines, n.o.s.	2752	127	1,2-Epoxy-3-ethoxypropane						
2733	132	Amines, flammable, corrosive, n.o.s.	2753	153	N-Ethylbenzyltoluidines						
2733	132	Polyalkylamines, n.o.s.	2753	153	N-Ethylbenzyltoluidines, liquid						
2733	132	Polyamines, flammable, corrosive, n.o.s.	2753	153	N-Ethylbenzyltoluidines, solid						
2734	132	Alkylamines, n.o.s.	2754	153	N-Ethyltoluidines						
2734	132	Amines, liquid, corrosive, flammable, n.o.s.									
2734	132	Polyalkylamines, n.o.s.									

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2782	131	Bipyridilium pesticide, liquid, flammable, toxic	2797	154	Battery fluid, alkali, with electronic equipment or actuating device	2810	153	HN-1	2811	154	Poisonous solid, organic, n.o.s.
2783	152	Organophosphorus pesticide, solid, poisonous	2798	137	Benzene phosphorus dichloride	2810	153	HN-2	2811	154	Toxic solid, organic, n.o.s.
2783	152	Organophosphorus pesticide, solid, toxic	2798	137	Phenylphosphorus dichloride	2810	153	HN-3	2812	154	Sodium aluminate, solid
2784	131	Organophosphorus pesticide, liquid, flammable, poisonous	2799	137	Benzene phosphorus thiodichloride	2810	153	L (Lewisite)	2813	138	Water-reactive solid, n.o.s.
2784	131	Organophosphorus pesticide, liquid, flammable, toxic	2799	137	Phenylphosphorus thiodichloride	2810	153	Lewisite	2814	158	Infectious substance, affecting humans
2785	152	4-Thiapentanal	2800	154	Batteries, wet, non-spillable	2810	153	Mustard	2815	153	N-Aminoethylpiperazine
2785	152	Thia-4-pentanal	2801	154	Dye, liquid, corrosive, n.o.s.	2810	153	Mustard Lewisite	2817	154	Ammonium bifluoride, solution
2786	153	Organotin pesticide, solid, poisonous	2801	154	Dye intermediate, liquid, corrosive, n.o.s.	2810	153	Poisonous liquid, n.o.s. (Inhalation Hazard Zone A)	2817	154	Ammonium hydrogendifluoride, solution
2786	153	Organotin pesticide, solid, toxic	2802	154	Copper chloride	2810	153	Poisonous liquid, n.o.s. (Inhalation Hazard Zone B)	2817	154	Ammonium hydrogen fluoride, solution
2787	131	Organotin pesticide, liquid, flammable, poisonous	2803	172	Gallium	2810	153	Poisonous liquid, organic, n.o.s.	2818	154	Ammonium polysulfide, solution
2787	131	Organotin pesticide, liquid, flammable, toxic	2805	138	Lithium hydride, fused solid	2810	153	Poisonous liquid, organic, n.o.s. (Inhalation Hazard Zone A)	2818	154	Ammonium polysulphide, solution
2788	153	Organotin compound, liquid, n.o.s.	2806	138	Lithium nitride	2810	153	Poisonous liquid, organic, n.o.s. (Inhalation Hazard Zone B)	2819	153	Amyl acid phosphate
2789	132	Acetic acid, glacial	2807	171	Magnetized material	2810	153	Sarin	2820	153	Butyric acid
2789	132	Acetic acid, solution, more than 80% acid	2809	172	Mercury	2810	153	Soman	2821	153	Phenol solution
2790	153	Acetic acid, solution, more than 10% but not more than 80% acid	2809	172	Mercury metal	2810	153	Tabun	2822	153	2-Chloropyridine
2793	170	Ferrous metal borings, shavings, turnings or cuttings	2810	153	Buzz	2810	153	Thickened GD	2823	153	Crotonic acid
2794	154	Batteries, wet, filled with acid	2810	153	BZ	2810	153	Toxic liquid, n.o.s.	2823	153	Crotonic acid, liquid
2795	154	Batteries, wet, filled with alkali	2810	153	Compound, tree or weed killing, liquid (toxic)	2810	153	Toxic liquid, n.o.s. (Inhalation Hazard Zone A)	2823	153	Crotonic acid, solid
2796	157	Battery fluid, acid	2810	153	CS	2810	153	Toxic liquid, n.o.s. (Inhalation Hazard Zone B)	2826	155	Ethyl chlorothioformate
2796	157	Sulfuric acid, with not more than 51% acid	2810	153	DC	2810	153	Toxic liquid, organic, n.o.s.	2829	153	Caproic acid
2796	157	Sulphuric acid, with not more than 51% acid	2810	153	GA	2810	153	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone A)	2829	153	Hexanoic acid
2797	154	Battery fluid, alkali	2810	153	GB	2810	153	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone B)	2830	139	Lithium ferrosilicon
2797	154	Battery fluid, alkali, with battery	2810	153	GD	2810	153	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone B)	2831	160	1,1,1-Trichloroethane
			2810	153	GF	2810	153	VX	2834	154	Phosphorous acid
			2810	153	H	2810	153	CX	2834	154	Phosphorous acid, ortho
			2810	153	HD				2835	138	Sodium aluminum hydride
			2810	153	HL				2837	154	Bisulfates, aqueous solution

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2837	154	Bisulphates, aqueous solution	2856	151	Fluorosilicates, n.o.s.	2880	140	Calcium hypochlorite, hydrated, with not less than 5.5% but not more than 16% water	2910	161	Radioactive material, excepted package, empty packaging
2837	154	Sodium bisulfate, solution	2856	151	Silicofluorides, n.o.s.				2910	161	Radioactive material, excepted package, instruments or articles
2837	154	Sodium bisulphate, solution	2857	126	Refrigerating machines, containing Ammonia solutions (UN2672)	2880	140	Calcium hypochlorite, hydrated mixture, with not less than 5.5% but not more than 16% water	2910	161	Radioactive material, excepted package, limited quantity of material
2837	154	Sodium hydrogen sulfate, solution	2857	126	Refrigerating machines, containing non-flammable, non-poisonous gases	2881	135	Metal catalyst, dry	2911	161	Radioactive material, excepted package, instruments or articles
2837	154	Sodium hydrogen sulphate, solution	2857	126	Refrigerating machines, containing non-flammable, non-toxic gases	2900	158	Infectious substance, affecting animals only	2912	162	Radioactive material, low specific activity (LSA), n.o.s.
2838	129P	Vinyl butyrate, stabilized	2858	170	Zirconium, dry, coiled wire, finished metal sheets or strips	2901	124	Bromine chloride	2912	162	Radioactive material, low specific activity (LSA-I), non fissile or fissile-excepted
2839	153	Aldol	2859	154	Ammonium metavanadate	2902	151	Pesticide, liquid, poisonous, n.o.s.	2913	162	Radioactive material, surface contaminated objects (SCO)
2840	129	Butyraldoxime	2861	151	Ammonium polyvanadate	2902	151	Pesticide, liquid, toxic, n.o.s.	2913	162	Radioactive material, surface contaminated objects (SCO-I), non fissile or fissileexcepted
2841	131	Di-n-amylamine	2862	151	Vanadium pentoxide	2903	131	Pesticide, liquid, poisonous, flammable, n.o.s.	2913	162	Radioactive material, surface contaminated objects (SCOII), non fissile or fissileexcepted
2842	129	Nitroethane	2863	154	Sodium ammonium vanadate	2903	131	Pesticide, liquid, toxic, flammable, n.o.s.	2915	163	Radioactive material, Type A package non-special form, non fissile or fissile-excepted
2844	138	Calcium manganese silicon	2864	151	Potassium metavanadate	2904	154	Chlorophenates, liquid	2916	163	Radioactive material, Type B(U) package, non fissile or fissile-excepted
2845	135	Ethyl phosphonous dichloride, anhydrous	2865	154	Hydroxylamine sulfate	2904	154	Chlorophenolates, liquid	2917	163	Radioactive material, Type B(M) package, non fissile or fissile-excepted
2845	135	Methyl phosphonous dichloride	2865	154	Hydroxylamine sulphate	2904	154	Phenolates, liquid	2918	165	Radioactive material, fissile, n.o.s.
2845	135	Pyrophoric liquid, n.o.s.	2869	157	Titanium trichloride mixture	2905	154	Chlorophenates, solid	2919	163	Radioactive material, transported under special arrangement, non fissile or fissile-excepted
2845	135	Pyrophoric liquid, organic, n.o.s.	2870	135	Aluminum borohydride	2905	154	Chlorophenolates, solid			
2846	135	Pyrophoric solid, n.o.s.	2870	135	Aluminum borohydride in devices	2907	133	Isosorbide dinitrate mixture			
2846	135	Pyrophoric solid, organic, n.o.s.	2871	170	Antimony powder	2908	161	Radioactive material, excepted package, empty packaging			
2849	153	3-Chloropropanol-1	2872	159	Dibromochloropropanes	2909	161	Radioactive material, excepted package, articles manufactured from depleted Uranium			
2850	128	Propylene tetramer	2873	153	Dibutylaminoethanol	2909	161	Radioactive material, excepted package, articles manufactured from natural Thorium			
2851	157	Boron trifluoride, dihydrate	2874	153	Furfuryl alcohol	2909	161	Radioactive material, excepted package, articles manufactured from natural Uranium			
2852	113	Dipicryl sulfide, wetted with not less than 10% water	2875	151	Hexachlorophene						
2852	113	Dipicryl sulphide, wetted with not less than 10% water	2876	153	Resorcinol						
2853	151	Magnesium fluorosilicate	2878	170	Titanium sponge granules						
2853	151	Magnesium silicofluoride	2878	170	Titanium sponge powders						
2854	151	Ammonium fluorosilicate	2879	157	Selenium oxychloride						
2854	151	Ammonium silicofluoride									
2855	151	Zinc fluorosilicate									
2855	151	Zinc silicofluoride									



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2920	132	Corrosive liquid, flammable, n.o.s.	2927	154	Poisonous liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	2929	131	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	2949	154	Sodium hydrosulfide, with not less than 25% water of crystallization
2921	134	Corrosive solid, flammable, n.o.s.	2927	154	Toxic liquid, corrosive, n.o.s.	2929	131	Toxic liquid, flammable, organic, n.o.s.	2949	154	Sodium hydrosulphide, with not less than 25% water of crystallization
2922	154	Corrosive liquid, poisonous, n.o.s.	2927	154	Toxic liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)	2929	131	Toxic liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone A)	2950	138	Magnesium granules, coated
2922	154	Corrosive liquid, toxic, n.o.s.	2927	154	Toxic liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	2929	131	Toxic liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone B)	2956	149	5-tert-Butyl-2,4,6-trinitrom-xylene
2923	154	Corrosive solid, poisonous, n.o.s.	2927	154	Toxic liquid, corrosive, organic, n.o.s.	2930	134	Poisonous solid, flammable, n.o.s.	2956	149	Musk xylene
2923	154	Corrosive solid, toxic, n.o.s.	2927	154	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)	2930	134	Poisonous solid, flammable, organic, n.o.s.	2965	139	Boron trifluoride dimethyl etherate
2924	132	Flammable liquid, corrosive, n.o.s.	2927	154	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	2930	134	Toxic solid, flammable, n.o.s.	2966	153	Thioglycol
2925	134	Flammable solid, corrosive, n.o.s.	2928	154	Poisonous solid, corrosive, n.o.s.	2930	134	Toxic solid, flammable, organic, n.o.s.	2967	154	Sulfamic acid
2925	134	Flammable solid, corrosive, organic, n.o.s.	2928	154	Toxic solid, corrosive, organic, n.o.s.	2931	151	Vanadyl sulfate	2967	154	Sulphamic acid
2926	134	Flammable solid, poisonous, n.o.s.	2929	131	Poisonous liquid, flammable, n.o.s.	2931	151	Vanadyl sulphate	2968	135	Maneb, stabilized
2926	134	Flammable solid, poisonous, organic, n.o.s.	2929	131	Poisonous liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	2933	129	Methyl 2-chloropropionate	2968	135	Maneb preparation, stabilized
2926	134	Flammable solid, toxic, organic, n.o.s.	2929	131	Poisonous liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	2934	129	Isopropyl 2-chloropropionate	2969	171	Castor beans, meal, pomace or flake
2927	154	Ethyl phosphonothioic dichloride, anhydrous	2929	131	Poisonous liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	2935	129	Ethyl 2-chloropropionate	2974	164	Radioactive material, special form, n.o.s.
2927	154	Ethyl phosphorodichloridate	2929	131	Poisonous liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	2936	153	Thiolactic acid	2975	162	Thorium metal, pyrophoric
2927	154	Poisonous liquid, corrosive, n.o.s.	2929	131	Poisonous liquid, flammable, organic, n.o.s.	2937	153	alpha-Methylbenzyl alcohol	2976	162	Thorium nitrate, solid
2927	154	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)	2929	131	Poisonous liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone A)	2937	153	alpha-Methylbenzyl alcohol, liquid	2977	166	Radioactive material, Uranium hexafluoride, fissile
2927	154	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	2929	131	Poisonous liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone B)	2940	135	Cyclooctadiene phosphines	2977	166	Uranium hexafluoride, fissile containing more than 1% Uranium-235
2927	154	Poisonous liquid, corrosive, organic, n.o.s.	2929	131	Toxic liquid, flammable, n.o.s.	2940	135	9-Phosphabicyclononanes	2978	166	Radioactive material, Uranium hexafluoride
2927	154	Poisonous liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)	2929	131	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	2941	153	Fluoroanilines	2978	166	Uranium hexafluoride
2927	154	Poisonous liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	2929	131	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	2942	153	2-Trifluoromethylaniline	2978	166	Uranium hexafluoride, non fissile or fissile-excepted
2927	154	Poisonous liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)	2929	131	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	2943	129	Tetrahydrofurfurylamine	2979	162	Uranium metal, pyrophoric
			2929	131	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	2945	132	N-Methylbutylamine	2980	162	Uranyl nitrate, hexahydrate, solution
						2946	153	2-Amino-5-diethylaminopentane			
						2947	155	Isopropyl chloroacetate			
						2948	153	3-Trifluoromethylaniline			

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
2981	162	Uranyl nitrate, solid	2994	151	Arsenical pesticide, liquid, poisonous	3009	131	Copper based pesticide, liquid, poisonous, flammable	3018	152	Organophosphorus pesticide, liquid, toxic
2982	163	Radioactive material, n.o.s.	2994	151	Arsenical pesticide, liquid, toxic	3009	131	Copper based pesticide, liquid, toxic, flammable	3019	131	Organotin pesticide, liquid, poisonous, flammable
2983	129P	Ethylene oxide and Propylene oxide mixture, with not more than 30% Ethylene oxide	2995	131	Organochlorine pesticide, liquid, poisonous, flammable	3010	151	Copper based pesticide, liquid, poisonous	3019	131	Organotin pesticide, liquid, toxic, flammable
2983	129P	Propylene oxide and Ethylene oxide mixture, with not more than 30% Ethylene oxide	2995	131	Organochlorine pesticide, liquid, toxic, flammable	3010	151	Copper based pesticide, liquid, toxic	3020	153	Organotin pesticide, liquid, poisonous
2984	140	Hydrogen peroxide, aqueous solution, with not less than 8% but less than 20% Hydrogen peroxide	2996	151	Organochlorine pesticide, liquid, toxic	3011	131	Mercury based pesticide, liquid, poisonous, flammable	3020	153	Organotin pesticide, liquid, toxic
2985	155	Chlorosilanes, flammable, corrosive, n.o.s.	2996	151	Organochlorine pesticide, liquid, toxic	3011	131	Mercury based pesticide, liquid, toxic, flammable	3021	131	Pesticide, liquid, flammable, poisonous, n.o.s.
2985	155	Chlorosilanes, n.o.s.	2997	131	Triazine pesticide, liquid, poisonous, flammable	3012	151	Mercury based pesticide, liquid, poisonous	3021	131	Pesticide, liquid, flammable, toxic, n.o.s.
2986	155	Chlorosilanes, corrosive, flammable, n.o.s.	2997	131	Triazine pesticide, liquid, toxic, flammable	3012	151	Mercury based pesticide, liquid, toxic	3022	127P	1,2-Butylene oxide, stabilized
2986	155	Chlorosilanes, n.o.s.	2998	151	Triazine pesticide, liquid, poisonous	3013	131	Substituted nitrophenol pesticide, liquid, poisonous, flammable	3023	131	2-Methyl-2-heptanethiol
2987	156	Chlorosilanes, corrosive, n.o.s.	2998	151	Triazine pesticide, liquid, toxic	3013	131	Substituted nitrophenol pesticide, liquid, toxic, flammable	3023	131	tert-Octyl mercaptan
2987	156	Chlorosilanes, n.o.s.	3002	151	Phenyl urea pesticide, liquid, poisonous	3014	153	Substituted nitrophenol pesticide, liquid, poisonous	3024	131	Coumarin derivative pesticide, liquid, flammable, poisonous
2988	139	Chlorosilanes, n.o.s.	3002	151	Phenyl urea pesticide, liquid, toxic	3014	153	Substituted nitrophenol pesticide, liquid, toxic	3024	131	Coumarin derivative pesticide, liquid, flammable, toxic
2988	139	Chlorosilanes, water-reactive, flammable, corrosive, n.o.s.	3005	131	Dithiocarbamate pesticide, liquid, poisonous, flammable	3015	131	Bipyridilium pesticide, liquid, poisonous, flammable	3025	131	Coumarin derivative pesticide, liquid, poisonous, flammable
2989	133	Lead phosphite, dibasic	3005	131	Dithiocarbamate pesticide, liquid, toxic, flammable	3015	131	Bipyridilium pesticide, liquid, toxic, flammable	3025	131	Coumarin derivative pesticide, liquid, toxic, flammable
2990	171	Life-saving appliances, selfinflating	3005	131	Thiocarbamate pesticide, liquid, poisonous, flammable	3016	151	Bipyridilium pesticide, liquid, poisonous	3026	151	Coumarin derivative pesticide, liquid, poisonous
2991	131	Carbamate pesticide, liquid, poisonous, flammable	3005	131	Thiocarbamate pesticide, liquid, toxic, flammable	3016	151	Bipyridilium pesticide, liquid, toxic	3026	151	Coumarin derivative pesticide, liquid, toxic
2991	131	Carbamate pesticide, liquid, toxic, flammable	3006	151	Dithiocarbamate pesticide, liquid, poisonous	3017	131	Organophosphorus pesticide, liquid, poisonous, flammable	3027	151	Coumarin derivative pesticide, solid, poisonous
2992	151	Carbamate pesticide, liquid, poisonous	3006	151	Dithiocarbamate pesticide, liquid, toxic	3017	131	Organophosphorus pesticide, liquid, toxic, flammable	3027	151	Coumarin derivative pesticide, solid, toxic
2992	151	Carbamate pesticide, liquid, toxic	3006	151	Thiocarbamate pesticide, liquid, poisonous	3018	152	Organophosphorus pesticide, liquid, poisonous	3028	154	Batteries, dry, containing Potassium hydroxide solid
2993	131	Arsenical pesticide, liquid, poisonous, flammable	3006	151	Thiocarbamate pesticide, liquid, toxic				3048	157	Aluminum phosphide pesticide
2993	131	Arsenical pesticide, liquid, toxic, flammable							3049	138	Metal alkyl halides, waterreactive, n.o.s.



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3049	138	Metal aryl halides, waterreactive, n.o.s.	3071	131	Mercaptan mixture, liquid, poisonous, flammable, n.o.s.	3082	171	Other regulated substances, liquid, n.o.s.	3094	138	Corrosive liquid, which in contact with water emits flammable gases, n.o.s.
3050	138	Metal alkyl hydrides, waterreactive, n.o.s.	3071	131	Mercaptan mixture, liquid, toxic, flammable, n.o.s.	3083	124	Perchloryl fluoride	3095	136	Corrosive solid, self-heating, n.o.s.
3050	138	Metal aryl hydrides, waterreactive, n.o.s.	3071	131	Mercaptans, liquid, poisonous, flammable, n.o.s.	3084	140	Corrosive solid, oxidizing, n.o.s.	3096	138	Corrosive solid, water-reactive, n.o.s.
3051	135	Aluminum alkyls	3071	131	Mercaptans, liquid, toxic, flammable, n.o.s.	3085	140	Oxidizing solid, corrosive, n.o.s.	3096	138	Corrosive solid, which in contact with water emits flammable gases, n.o.s.
3052	135	Aluminum alkyl halides	3072	171	Life-saving appliances, not self-inflating	3086	141	Poisonous solid, oxidizing, n.o.s.	3097	140	Flammable solid, oxidizing, n.o.s.
3052	135	Aluminum alkyl halides, liquid	3073	131P	Vinylpyridines, stabilized	3086	141	Toxic solid, oxidizing, n.o.s.	3098	140	Oxidizing liquid, corrosive, n.o.s.
3052	135	Aluminum alkyl halides, solid	3076	138	Aluminum alkyl hydrides	3087	141	Oxidizing solid, poisonous, n.o.s.	3099	142	Oxidizing liquid, poisonous, n.o.s.
3053	135	Magnesium alkyls	3077	171	Environmentally hazardous substances, solid, n.o.s.	3087	141	Oxidizing solid, toxic, n.o.s.	3099	142	Oxidizing liquid, toxic, n.o.s.
3054	129	Cyclohexanethiol	3077	171	Hazardous waste, solid, n.o.s.	3088	135	Self-heating solid, organic, n.o.s.	3100	135	Oxidizing solid, self-heating, n.o.s.
3054	129	Cyclohexyl mercaptan	3077	171	Other regulated substances, solid, n.o.s.	3089	170	Metal powder, flammable, n.o.s.	3101	146	Organic peroxide type B, liquid
3055	154	2-(2-Aminoethoxy)ethanol	3078	138	Cerium, turnings or gritty powder	3090	138	Lithium batteries	3102	146	Organic peroxide type B, solid
3056	129	n-Heptaldehyde	3079	131P	Methacrylonitrile, stabilized	3090	138	Lithium batteries, liquid or solid cathode	3103	146	Organic peroxide type C, liquid
3057	125	Trifluoroacetyl chloride	3080	155	Isocyanate solution, poisonous, flammable, n.o.s.	3091	138	Lithium metal batteries (including lithium alloy batteries)	3104	146	Organic peroxide type C, solid
3064	127	Nitroglycerin, solution in alcohol, with more than 1% but not more than 5% Nitroglycerin	3080	155	Isocyanate solution, toxic, flammable, n.o.s.	3091	138	Lithium batteries contained in equipment	3105	145	Organic peroxide type D, liquid
3065	127	Alcoholic beverages	3080	155	Isocyanate solutions, n.o.s.	3091	138	Lithium batteries packed with equipment	3106	145	Organic peroxide type D, solid
3066	153	Paint (corrosive)	3080	155	Isocyanates, n.o.s.	3091	138	Lithium metal batteries contained in equipment (including lithium alloy batteries)	3107	145	Organic peroxide type E, liquid
3066	153	Paint related material (corrosive)	3080	155	Isocyanates, poisonous, flammable, n.o.s.	3091	138	Lithium metal batteries packed with equipment (including lithium alloy batteries)	3108	145	Organic peroxide type E, solid
3070	126	Dichlorodifluoromethane and Ethylene oxide mixture, with not more than 12.5% Ethylene oxide	3080	155	Isocyanates, toxic, flammable, n.o.s.	3092	129	1-Methoxy-2-propanol	3109	145	Organic peroxide type F, liquid
3070	126	Dichlorodifluoromethane and Ethylene oxide mixtures, with not more than 12% Ethylene oxide	3082	171	Environmentally hazardous substances, liquid, n.o.s.	3093	140	Corrosive liquid, oxidizing, n.o.s.	3110	145	Organic peroxide type F, solid
3070	126	Ethylene oxide and Dichlorodifluoromethane mixture, with not more than 12.5% Ethylene oxide	3082	171	Hazardous waste, liquid, n.o.s.	3094	138	Corrosive liquid, waterreactive, n.o.s.	3111	148	Organic peroxide type B, liquid, temperature controlled
3070	126	Ethylene oxide and Dichlorodifluoromethane mixtures, with not more than 12% Ethylene oxide							3112	148	Organic peroxide type B, solid, temperature controlled
									3113	148	Organic peroxide type C, liquid, temperature controlled
									3114	148	Organic peroxide type C, solid, temperature controlled

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3115	148	Organic peroxide type D, liquid, temperature controlled	3123	139	Poisonous liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone B)	3127	135	Self-heating solid, oxidizing, n.o.s.	3138	115	Propylene, Ethylene and Acetylene in mixture, refrigerated liquid containing at least 71.5% Ethylene with not more than 22.5% Acetylene and not more than 6% Propylene
3116	148	Organic peroxide type D, solid, temperature controlled	3123	139	Toxic liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)	3128	136	Self-heating solid, poisonous, organic, n.o.s.	3139	140	Oxidizing liquid, n.o.s.
3117	148	Organic peroxide type E, liquid, temperature controlled	3123	139	Toxic liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)	3128	136	Self-heating solid, toxic, organic, n.o.s.	3140	151	Alkaloids, liquid, n.o.s. (poisonous)
3118	148	Organic peroxide type E, solid, temperature controlled	3123	139	Toxic liquid, which in contact with water emits flammable gases, n.o.s.	3129	138	Water-reactive liquid, corrosive, n.o.s.	3140	151	Alkaloid salts, liquid, n.o.s. (poisonous)
3119	148	Organic peroxide type F, liquid, temperature controlled	3123	139	Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone A)	3130	139	Water-reactive liquid, poisonous, n.o.s.	3141	157	Antimony compound, inorganic, liquid, n.o.s.
3120	1	48 Organic peroxide type F, solid, temperature controlled	3123	139	Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone B)	3130	139	Water-reactive liquid, toxic, n.o.s.	3142	151	Disinfectant, liquid, poisonous, n.o.s.
3121	144	Oxidizing solid, water-reactive, n.o.s.	3123	139	Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone A)	3131	138	Water-reactive solid, corrosive, n.o.s.	3142	151	Disinfectant, liquid, toxic, n.o.s.
3122	142	Poisonous liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	3123	139	Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone B)	3132	138	Water-reactive solid, flammable, n.o.s.	3142	151	Disinfectants, liquid, n.o.s. (poisonous)
3122	142	Poisonous liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	3124	136	Poisonous solid, self-heating, n.o.s.	3133	138	Water-reactive solid, oxidizing, n.o.s.	3143	151	Dye, solid, poisonous, n.o.s.
3122	142	Toxic liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	3124	136	Toxic solid, self-heating, n.o.s.	3134	139	Water-reactive solid, poisonous, n.o.s.	3143	151	Dye, solid, toxic, n.o.s.
3122	142	Toxic liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	3125	139	Poisonous solid, waterreactive, n.o.s.	3134	139	Water-reactive solid, toxic, n.o.s.	3143	151	Dye intermediate, solid, poisonous, n.o.s.
3123	139	Poisonous liquid, waterreactive, n.o.s. (Inhalation Hazard Zone A)	3125	139	Poisonous solid, which in contact with water emits flammable gases, n.o.s.	3135	138	Water-reactive solid, selfheating, n.o.s.	3143	151	Dye intermediate, solid, toxic, n.o.s.
3123	139	Poisonous liquid, waterreactive, n.o.s. (Inhalation Hazard Zone B)	3125	139	Toxic solid, water-reactive, n.o.s.	3136	120	Trifluoromethane, refrigerated liquid	3144	151	Nicotine compound, liquid, n.o.s.
3123	139	Poisonous liquid, which in contact with water emits flammable gases, n.o.s.	3125	139	Toxic solid, which in contact with water emits flammable gases, n.o.s.	3137	140	Oxidizing solid, flammable, n.o.s.	3144	151	Nicotine preparation, liquid, n.o.s.
3123	139	Poisonous liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone A)	3126	136	Self-heating solid, corrosive, organic, n.o.s.	3138	115	Acetylene, Ethylene and Propylene in mixture, refrigerated liquid containing at least 71.5% Ethylene with not more than 22.5% Acetylene and not more than 6% Propylene	3145	153	Alkyl phenols, liquid, n.o.s. (including C2-C12 homologues)
									3146	153	Organotin compound, solid, n.o.s.
									3147	154	Dye, solid, corrosive, n.o.s.
									3147	154	Dye intermediate, solid, corrosive, n.o.s.
									3148	138	Water-reactive liquid, n.o.s.

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3149	140	Hydrogen peroxide and Peroxyacetic acid mixture, with acid(s), water and not more than 5% Peroxyacetic acid, stabilized	3160	119	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	3163	126	Liquefied gas, n.o.s.	3170	138	Aluminum dross
3150	115	Devices, small, hydrocarbon gas powered, with release device	3160	119	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	3164	126	Articles, pressurized, hydraulic (containing non-flammable gas)	3170	138	Aluminum processing by-products
3150	115	Hydrocarbon gas refills for small devices, with release device	3160	119	Liquefied gas, toxic, flammable, n.o.s.	3164	126	Articles, pressurized, pneumatic (containing nonflammable gas)	3170	138	Aluminum remelting byproducts
3151	171	Polyhalogenated biphenyls, liquid	3160	119	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)	3165	131	Aircraft hydraulic power unit fuel tank	3170	138	Aluminum smelting by-products
3151	171	Polyhalogenated terphenyls, liquid	3160	119	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	3166	128	Engine, fuel cell, flammable gas powered	3171	154	Battery-powered equipment (wet battery)
3152	171	Polyhalogenated biphenyls, solid	3160	119	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	3166	128	Engine, fuel cell, flammable liquid powered	3171	154	Battery-powered vehicle (wet battery)
3152	171	Polyhalogenated terphenyls, solid	3160	119	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	3166	128	Engine, internal combustion	3171	154	Wheelchair, electric, with batteries
3153	115	Perfluoromethyl vinyl ether	3161	115	Liquefied gas, flammable, n.o.s.	3166	128	Engines, internal combustion, flammable gas powered	3172	153	Toxins, extracted from living sources, liquid, n.o.s.
3153	115	Perfluoro(methyl vinyl ether)	3162	123	Liquefied gas, poisonous, n.o.s.	3166	128	Engines, internal combustion, flammable liquid powered	3172	153	Toxins, extracted from living sources, n.o.s.
3154	115	Perfluoroethyl vinyl ether	3162	123	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone A)	3166	128	Vehicle, flammable gas powered	3172	153	Toxins, extracted from living sources, solid, n.o.s.
3154	115	Perfluoro(ethyl vinyl ether)	3162	123	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone B)	3166	128	Vehicle, flammable liquid powered	3174	135	Titanium disulfide
3155	154	Pentachlorophenol	3162	123	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone C)	3166	128	Vehicle, fuel cell, flammable gas powered	3174	135	Titanium disulphide
3156	122	Compressed gas, oxidizing, n.o.s.	3162	123	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone D)	3166	128	Vehicle, fuel cell, flammable liquid powered	3175	133	Solids containing flammable liquid, n.o.s.
3157	122	Liquefied gas, oxidizing, n.o.s.	3162	123	Liquefied gas, toxic, n.o.s.	3167	115	Gas sample, non-pressurized, flammable, n.o.s., not refrigerated liquid	3176	133	Flammable solid, organic, molten, n.o.s.
3158	120	Gas, refrigerated liquid, n.o.s.	3162	123	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone A)	3168	119	Gas sample, non-pressurized, poisonous, flammable, n.o.s., not refrigerated liquid	3178	133	Flammable solid, inorganic, n.o.s.
3159	126	Refrigerant gas R-134a	3162	123	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone B)	3168	119	Gas sample, non-pressurized, toxic, flammable, n.o.s., not refrigerated liquid	3178	133	Smokeless powder for small arms
3159	126	1,1,1,2-Tetrafluoroethane	3162	123	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone C)	3169	123	Gas sample, non-pressurized, poisonous, n.o.s., not refrigerated liquid	3179	134	Flammable solid, poisonous, inorganic, n.o.s.
3160	119	Liquefied gas, poisonous, flammable, n.o.s.	3162	123	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone D)	3169	123	Gas sample, non-pressurized, toxic, n.o.s., not refrigerated liquid	3179	134	Flammable solid, toxic, inorganic, n.o.s.
3160	119	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)							3180	134	Flammable solid, corrosive, inorganic, n.o.s.
3160	119	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)							3180	134	Flammable solid, inorganic, corrosive, n.o.s.
									3181	133	Metal salts of organic compounds, flammable, n.o.s.

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3182	170	Metal hydrides, flammable, n.o.s.	3206	136	Alkali metal alcoholates, selfheating, corrosive, n.o.s.	3220	126	Refrigerant gas R-125	3244	154	Solids containing corrosive liquid, n.o.s.
3183	135	Self-heating liquid, organic, n.o.s.	3207	138	Organometallic compound, water-reactive, flammable, n.o.s.	3221	149	Self-reactive liquid type B	3245	171	Genetically modified microorganisms
3184	136	Self-heating liquid, poisonous, organic, n.o.s.	3207	138	Organometallic compound dispersion, water-reactive, flammable, n.o.s.	3222	149	Self-reactive solid type B	3245	171	Genetically modified organisms
3184	136	Self-heating liquid, toxic, organic, n.o.s.	3207	138	Organometallic compound solution, water-reactive, flammable, n.o.s.	3224	149	Self-reactive solid type C	3246	156	Methanesulfonyl chloride
3185	136	Self-heating liquid, corrosive, organic, n.o.s.	3208	138	Metallic substance, waterreactive, n.o.s.	3225	149	Self-reactive liquid type D	3246	156	Methanesulphonyl chloride
3186	135	Self-heating liquid, inorganic, n.o.s.	3209	138	Metallic substance, waterreactive, self-heating, n.o.s.	3226	149	Self-reactive solid type D	3247	140	Sodium peroxoborate, anhydrous
3187	136	Self-heating liquid, poisonous, inorganic, n.o.s.	3210	140	Chlorates, inorganic, aqueous solution, n.o.s.	3227	149	Self-reactive liquid type E	3248	131	Medicine, liquid, flammable, poisonous, n.o.s.
3187	136	Self-heating liquid, toxic, inorganic, n.o.s.	3211	140	Perchlorates, inorganic, aqueous solution, n.o.s.	3228	149	Self-reactive solid type E	3248	131	Medicine, liquid, flammable, toxic, n.o.s.
3188	136	Self-heating liquid, corrosive, inorganic, n.o.s.	3212	140	Hypochlorites, inorganic, n.o.s.	3229	149	Self-reactive liquid type F	3249	151	Medicine, solid, poisonous, n.o.s.
3189	135	Metal powder, self-heating, n.o.s.	3213	140	Bromates, inorganic, aqueous solution, n.o.s.	3230	149	Self-reactive solid type F	3249	151	Medicine, solid, toxic, n.o.s.
3189	135	Self-heating metal powders, n.o.s.	3214	140	Permanganates, inorganic, aqueous solution, n.o.s.	3231	150	Self-reactive liquid type B, temperature controlled	3250	153	Chloroacetic acid, molten
3190	135	Self-heating solid, inorganic, n.o.s.	3215	140	Persulfates, inorganic, n.o.s.	3232	150	Self-reactive solid type B, temperature controlled	3251	133	Isosorbide-5-mononitrate
3191	136	Self-heating solid, inorganic, poisonous, n.o.s.	3215	140	Persulphates, inorganic, n.o.s.	3233	150	Self-reactive liquid type C, temperature controlled	3252	115	Difluoromethane
3191	136	Self-heating solid, inorganic, toxic, n.o.s.	3216	140	Persulfates, inorganic, aqueous solution, n.o.s.	3234	150	Self-reactive solid type C, temperature controlled	3252	115	Refrigerant gas R-32
3191	136	Self-heating solid, poisonous, inorganic, n.o.s.	3216	140	Persulphates, inorganic, aqueous solution, n.o.s.	3235	150	Self-reactive liquid type D, temperature controlled	3253	154	Disodium trioxosilicate
3191	136	Self-heating solid, toxic, inorganic, n.o.s.	3218	140	Nitrates, inorganic, aqueous solution, n.o.s.	3236	150	Self-reactive solid type D, temperature controlled	3253	154	Disodium trioxosilicate, pentahydrate
3192	136	Self-heating solid, corrosive, inorganic, n.o.s.	3219	140	Nitrites, inorganic, aqueous solution, n.o.s.	3237	150	Self-reactive liquid type E, temperature controlled	3254	135	Tributylphosphane
3194	135	Pyrophoric liquid, inorganic, n.o.s.	3220	126	Pentafluoroethane	3238	150	Self-reactive solid type E, temperature controlled	3254	135	Tributylphosphine
3200	135	Pyrophoric solid, inorganic, n.o.s.				3239	150	Self-reactive liquid type F, temperature controlled	3255	135	tert-Butyl hypochlorite
3203	135	Pyrophoric organometallic compound, water-reactive, n.o.s.				3240	150	Self-reactive solid type F, temperature controlled	3256	128	Elevated temperature liquid, flammable, n.o.s., with flash point above 37.8°C (100°F), at or above its flash point
3205	135	Alkaline earth metal alcoholates, n.o.s.				3241	133	2-Bromo-2-nitropropane-1, 3-diol	3256	128	Elevated temperature liquid, flammable, n.o.s., with flash point above 60°C (140°F), at or above its flash point
						3242	149	Azodicarbonamide			
						3243	151	Solids containing poisonous liquid, n.o.s.			
						3243	151	Solids containing toxic liquid, n.o.s.			



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3257	128	Elevated temperature liquid, n.o.s., at or above 100°C (212°F), and below its flash point	3272	127	Esters, n.o.s.	3280	151	Organoarsenic compound, liquid, n.o.s.	3288	151	Poisonous solid, inorganic, n.o.s.
3258	171	Elevated temperature solid, n.o.s., at or above 240°C (464°F)	3273	131	Nitriles, flammable, poisonous, n.o.s.	3280	151	Organoarsenic compound, n.o.s.	3288	151	Toxic solid, inorganic, n.o.s.
3259	154	Amines, solid, corrosive, n.o.s.	3273	131	Nitriles, flammable, toxic, n.o.s.	3281	151	Metal carbonyls, liquid, n.o.s.	3289	154	Poisonous liquid, corrosive, inorganic, n.o.s.
3259	154	Polyamines, solid, corrosive, n.o.s.	3274	132	Alcoholates solution, n.o.s., in alcohol	3281	151	Metal carbonyls, n.o.s.	3289	154	Poisonous liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)
3260	154	Corrosive solid, acidic, inorganic, n.o.s.	3275	131	Nitriles, poisonous, flammable, n.o.s.	3282	151	Organometallic compound, liquid, poisonous, n.o.s.	3289	154	Poisonous liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone B)
3261	154	Corrosive solid, acidic, organic, n.o.s.	3275	131	Nitriles, toxic, flammable, n.o.s.	3282	151	Organometallic compound, liquid, toxic, n.o.s.	3289	154	Toxic liquid, corrosive, inorganic, n.o.s.
3262	154	Corrosive solid, basic, inorganic, n.o.s.	3276	151	Nitriles, liquid, poisonous, n.o.s.	3282	151	Organometallic compound, poisonous, liquid, n.o.s.	3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)
3263	154	Corrosive solid, basic, organic, n.o.s.	3276	151	Nitriles, liquid, toxic, n.o.s.	3282	151	Organometallic compound, poisonous, n.o.s.	3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)
3264	154	Corrosive liquid, acidic, inorganic, n.o.s.	3276	151	Nitriles, poisonous, liquid, n.o.s.	3282	151	Organometallic compound, toxic, liquid, n.o.s.	3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone B)
3265	153	Corrosive liquid, acidic, organic, n.o.s.	3276	151	Nitriles, poisonous, n.o.s.	3282	151	Organometallic compound, toxic, liquid, n.o.s.	3290	154	Poisonous solid, corrosive, inorganic, n.o.s.
3266	154	Corrosive liquid, basic, inorganic, n.o.s.	3276	151	Nitriles, toxic, liquid, n.o.s.	3282	151	Organometallic compound, toxic, n.o.s.	3290	154	Toxic solid, corrosive, inorganic, n.o.s.
3267	153	Corrosive liquid, basic, organic, n.o.s.	3276	151	Nitriles, toxic, n.o.s.	3283	151	Selenium compound, n.o.s.	3291	158	(Bio)Medical waste, n.o.s.
3268	171	Air bag inflators	3277	154	Chloroformates, poisonous, corrosive, n.o.s.	3283	151	Selenium compound, solid, n.o.s.	3291	158	Clinical waste, unspecified, n.o.s.
3268	171	Air bag inflators, pyrotechnic	3277	154	Chloroformates, toxic, corrosive, n.o.s.	3284	151	Tellurium compound, n.o.s.	3291	158	Medical waste, n.o.s.
3268	171	Air bag modules	3278	151	Organophosphorus compound, liquid, poisonous, n.o.s.	3285	151	Vanadium compound, n.o.s.	3291	158	Regulated medical waste, n.o.s.
3268	171	Air bag modules, pyrotechnic	3278	151	Organophosphorus compound, liquid, toxic, n.o.s.	3286	131	Flammable liquid, poisonous, corrosive, n.o.s.	3292	138	Batteries, containing Sodium
3268	171	Seat-belt modules	3278	151	Organophosphorus compound, poisonous, liquid, n.o.s.	3286	131	Flammable liquid, toxic, corrosive, n.o.s.	3292	138	Cells, containing Sodium
3268	171	Seat-belt pre-tensioners	3278	151	Organophosphorus compound, poisonous, n.o.s.	3287	151	Poisonous liquid, inorganic, n.o.s.	3293	152	Hydrazine, aqueous solution, with not more than 37% Hydrazine
3268	171	Seat-belt pre-tensioners, pyrotechnic	3278	151	Organophosphorus compound, toxic, liquid, n.o.s.	3287	151	Poisonous liquid, inorganic, n.o.s. (Inhalation Hazard Zone A)	3294	131	Hydrogen cyanide, solution in alcohol, with not more than 45% Hydrogen cyanide
3269	128	Polyester resin kit	3278	151	Organophosphorus compound, toxic, n.o.s.	3287	151	Toxic liquid, inorganic, n.o.s. (Inhalation Hazard Zone A)	3295	128	Hydrocarbons, liquid, n.o.s.
3270	133	Nitrocellulose membrane filters	3279	131	Organophosphorus compound, poisonous, flammable, n.o.s.	3287	151	Toxic liquid, inorganic, n.o.s. (Inhalation Hazard Zone B)			
3271	127	Ethers, n.o.s.	3279	131	Organophosphorus compound, toxic, flammable, n.o.s.						

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3296	126	Heptafluoropropane	3303	124	Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone C)	3304	123	Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone B)	3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)
3296	126	Refrigerant gas R-227	3303	124	Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone D)	3304	123	Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone C)	3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)
3297	126	Chlorotetrafluoroethane and Ethylene oxide mixture, with not more than 8.8% Ethylene oxide	3303	124	Compressed gas, toxic, oxidizing, n.o.s.	3304	123	Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone D)	3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)
3297	126	Ethylene oxide and Chlorotetrafluoroethane mixture, with not more than 8.8% Ethylene oxide	3303	124	Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone A)	3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s.	3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)
3298	126	Ethylene oxide and Pentafluoroethane mixture, with not more than 7.9% Ethylene oxide	3303	124	Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone B)	3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s.
3298	126	Pentafluoroethane and Ethylene oxide mixture, with not more than 7.9% Ethylene oxide	3303	124	Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone C)	3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)
3299	126	Ethylene oxide and Tetrafluoroethane mixture, with not more than 5.6% Ethylene oxide	3303	124	Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone D)	3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)
3299	126	Tetrafluoroethane and Ethylene oxide mixture, with not more than 5.6% Ethylene oxide	3304	123	Compressed gas, poisonous, corrosive, n.o.s.	3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)
3300	119P	Carbon dioxide and Ethylene oxide mixture, with more than 87% Ethylene oxide	3304	123	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone A)	3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s.	3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)
3300	119P	Ethylene oxide and Carbon dioxide mixture, with more than 87% Ethylene oxide	3304	123	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone B)	3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	3307	124	Liquefied gas, poisonous, oxidizing, n.o.s.
3301	136	Corrosive liquid, self-heating, n.o.s.	3304	123	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone C)	3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone A)
3302	152	2-Dimethylaminoethyl acrylate	3304	123	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone D)	3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone B)
3303	124	Compressed gas, poisonous, oxidizing, n.o.s.	3304	123	Compressed gas, toxic, corrosive, n.o.s.	3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone C)
3303	124	Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone A)	3304	123	Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone A)	3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s.	3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone D)



ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3307	124	Liquefied gas, toxic, oxidizing, n.o.s.	3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s.	3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	3317	113	2-Amino-4,6-dinitrophenol, wetted with not less than 20% water
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone A)	3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	3318	125	Ammonia solution, with more than 50% Ammonia
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone B)	3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s.	3319	113	Nitroglycerin mixture, desensitized, solid, n.o.s., with more than 2% but not more than 10% Nitroglycerin
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone C)	3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)	3319	113	Nitroglycerin mixture with more than 2% but not more than 10% Nitroglycerin, desensitized
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone D)	3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	3320	157	Sodium borohydride and Sodium hydroxide solution, with not more than 12% Sodium borohydride and not more than 40% Sodium hydroxide
3308	123	Liquefied gas, poisonous, corrosive, n.o.s.	3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	3321	162	Radioactive material, low specific activity (LSA-II), non fissile or fissile-excepted
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone A)	3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s.	3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	3322	162	Radioactive material, low specific activity (LSA-III), non fissile or fissile-excepted
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone B)	3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	3311	122	Gas, refrigerated liquid, oxidizing, n.o.s.	3323	163	Radioactive material, Type C package, non-fissile or fissile excepted
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone C)	3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	3312	115	Gas, refrigerated liquid, flammable, n.o.s.	3324	165	Radioactive material, low specific activity (LSA-II), fissile
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone D)	3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	3313	135	Organic pigments, self-heating	3325	165	Radioactive material, low specific activity (LSA-III), fissile
3308	123	Liquefied gas, toxic, corrosive, n.o.s.	3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	3314	171	Plastic molding compound	3326	165	Radioactive material, surface contaminated objects (SCO-I), fissile
3308	123	Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone A)	3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s.	3315	151	Chemical sample, poisonous liquid	3326	165	Radioactive material, surface contaminated objects (SCO-II), fissile
3308	123	Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone B)	3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)	3315	151	Chemical sample, poisonous solid	3327	165	Radioactive material, Type A package, fissile, non-special form
3308	123	Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone C)	3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	3315	151	Chemical sample, toxic			
3308	123	Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone D)				3315	151	Chemical sample, toxic liquid			
						3315	151	Chemical sample, toxic solid			
						3316	171	Chemical kit			
						3316	171	First aid kit			

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3328	165	Radioactive material, Type B(U) package, fissile	3344	113	PETN mixture, desensitized, solid, n.o.s., with more than 10% but not more than 20% PETN	3353	126	Air bag inflators, compressed gas	3357	113	Nitroglycerin mixture, desensitized, liquid, n.o.s., with not more than 30% Nitroglycerin
3329	165	Radioactive material, Type B(M) package, fissile	3345	153	Phenoxyacetic acid derivative pesticide, solid, poisonous	3353	126	Air bag modules, compressed gas	3358	115	Refrigerating machines, containing flammable, nonpoisonous, liquefied gases
3330	165	Radioactive material, Type C package, fissile	3345	153	Phenoxyacetic acid derivative pesticide, solid, toxic	3354	115	Insecticide gas, flammable, n.o.s.	3358	115	Refrigerating machines, containing flammable, nontoxic, liquefied gases
3331	165	Radioactive material, transported under special arrangement, fissile	3346	131	Phenoxyacetic acid derivative pesticide, liquid, flammable, poisonous	3355	119	Insecticide gas, poisonous, flammable, n.o.s.	3359	171	Fumigated cargo transport unit
3332	164	Radioactive material, Type A package, special form, non fissile or fissile-excepted	3346	131	Phenoxyacetic acid derivative pesticide, liquid, flammable, toxic	3355	119	Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	3359	171	Fumigated unit
3333	165	Radioactive material, Type A package, special form, fissile	3347	131	Phenoxyacetic acid derivative pesticide, liquid, poisonous, flammable	3355	119	Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	3360	133	Fibers, vegetable, dry
3334	171	Aviation regulated liquid, n.o.s.	3347	131	Phenoxyacetic acid derivative pesticide, liquid, poisonous, flammable	3355	119	Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	3360	133	Fibres, vegetable, dry
3334	171	Self-defense spray, nonpressurized	3347	131	Phenoxyacetic acid derivative pesticide, liquid, toxic, flammable	3355	119	Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	3361	156	Chlorosilanes, poisonous, corrosive, n.o.s.
3335	171	Aviation regulated solid, n.o.s.	3348	153	Phenoxyacetic acid derivative pesticide, liquid, poisonous	3355	119	Insecticide gas, toxic, flammable, n.o.s.	3361	156	Chlorosilanes, toxic, corrosive, n.o.s.
3336	130	Mercaptan mixture, liquid, flammable, n.o.s.	3348	153	Phenoxyacetic acid derivative pesticide, liquid, toxic	3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)	3362	155	Chlorosilanes, poisonous, corrosive, flammable, n.o.s.
3336	130	Mercaptans, liquid, flammable, n.o.s.	3349	151	Pyrethroid pesticide, solid, poisonous	3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	3362	155	Chlorosilanes, toxic, corrosive, flammable, n.o.s.
3337	126	Refrigerant gas R-404A	3349	151	Pyrethroid pesticide, solid, toxic	3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	3363	171	Dangerous goods in apparatus
3338	126	Refrigerant gas R-407A	3350	131	Pyrethroid pesticide, liquid, flammable, poisonous	3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	3363	171	Dangerous goods in machinery
3339	126	Refrigerant gas R-407B	3350	131	Pyrethroid pesticide, liquid, flammable, toxic	3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)	3364	113	Picric acid, wetted with not less than 10% water
3340	126	Refrigerant gas R-407C	3351	131	Pyrethroid pesticide, liquid, poisonous, flammable	3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	3364	113	Trinitrophenol, wetted with not less than 10% water
3341	135	Thiourea dioxide	3351	131	Pyrethroid pesticide, liquid, toxic, flammable	3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	3365	113	Picryl chloride, wetted with not less than 10% water
3342	135	Xanthates	3352	151	Pyrethroid pesticide, liquid, poisonous	3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	3365	113	Trinitrochlorobenzene, wetted with not less than 10% water
3343	113	Nitroglycerin mixture, desensitized, liquid, flammable, n.o.s., with not more than 30% Nitroglycerin	3352	151	Pyrethroid pesticide, liquid, toxic	3356	140	Oxygen generator, chemical, spent	3366	113	TNT, wetted with not less than 10% water
3344	113	Pentaerythrite tetranitrate mixture, desensitized, solid, n.o.s., with more than 10% but not more than 20% PETN							3366	113	Trinitrotoluene, wetted with not less than 10% water
3344	113	Pentaerythritol tetranitrate mixture, desensitized, solid, n.o.s., with more than 10% but not more than 20% PETN							3367	113	Trinitrobenzene, wetted with not less than 10% water

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3368	113	Trinitrobenzoic acid, wetted with not less than 10% water	3383	131	Toxic by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	3390	154	Poisonous by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	3407	140	Chlorate and Magnesium chloride mixture, solution
3369	113	Sodium dinitro-o-cresolate, wetted with not less than 10% water	3384	131	Poisonous by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	3390	154	Toxic by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	3407	140	Magnesium chloride and Chlorate mixture, solution
3370	113	Urea nitrate, wetted with not less than 10% water	3384	131	Toxic by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	3391	135	Organometallic substance, solid, pyrophoric	3408	141	Lead perchlorate, solution
3371	129	2-Methylbutanal	3385	139	Poisonous by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)	3392	135	Organometallic substance, liquid, pyrophoric	3409	152	Chloronitrobenzenes, liquid
3372	138	Organometallic compound, solid, water-reactive, flammable, n.o.s.	3385	139	Toxic by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)	3393	135	Organometallic substance, solid, pyrophoric, waterreactive	3410	153	4-Chloro-o-toluidine hydrochloride, solution
3373	158	Biological substance, category B	3386	139	Poisonous by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)	3394	135	Organometallic substance, liquid, pyrophoric, waterreactive	3411	153	beta-Naphthylamine, solution
3373	158	Clinical specimens	3386	139	Toxic by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)	3395	135	Organometallic substance, solid, water-reactive	3411	153	Naphthylamine (beta), solution
3373	158	Diagnostic specimens	3387	142	Poisonous by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	3396	138	Organometallic substance, solid, water-reactive, flammable	3412	153	Formic acid, with not less than 5% but less than 10% acid
3374	116	Acetylene, solvent free	3387	142	Toxic by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	3397	138	Organometallic substance, solid, water-reactive, selfheating	3412	153	Formic acid, with not less than 10% but not more than 85% acid
3375	140	Ammonium nitrate emulsion	3388	142	Poisonous by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	3398	135	Organometallic substance, liquid, water-reactive	3413	157	Potassium cyanide, solution
3375	140	Ammonium nitrate gel	3388	142	Toxic by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	3399	138	Organometallic substance, liquid, water-reactive, flammable	3414	157	Sodium cyanide, solution
3375	140	Ammonium nitrate suspension	3389	154	Poisonous by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)	3400	138	Organometallic substance, solid, self-heating	3415	154	Sodium fluoride, solution
3376	113	4-Nitrophenylhydrazine, with not less than 30% water	3389	154	Toxic by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)	3401	138	Alkali metal amalgam, solid	3416	153	Chloroacetophenone, liquid
3377	140	Sodium perborate monohydrate				3402	138	Alkaline earth metal amalgam, solid	3417	152	Xylyl bromide, solid
3378	140	Sodium carbonate peroxyhydrate				3403	138	Potassium, metal alloys, solid	3418	151	2,4-Toluylenediamine, solution
3379	128	Desensitized explosive, liquid, n.o.s.				3404	138	Potassium sodium alloys, solid	3419	157	Boron trifluoride acetic acid complex, solid
3380	133	Desensitized explosive, solid, n.o.s.				3404	138	Sodium potassium alloys, solid	3420	157	Boron trifluoride propionic acid complex, solid
3381	151	Poisonous by inhalation liquid, n.o.s. (Inhalation Hazard Zone A)				3405	141	Barium chlorate, solution	3421	154	Potassium hydrogen difluoride, solution
3381	151	Toxic by inhalation liquid, n.o.s. (Inhalation Hazard Zone A)				3406	141	Barium perchlorate, solution	3422	154	Potassium fluoride, solution
3382	151	Poisonous by inhalation liquid, n.o.s. (Inhalation Hazard Zone B)							3423	153	Tetramethylammonium hydroxide, solid
3382	151	Toxic by inhalation liquid, n.o.s. (Inhalation Hazard Zone B)							3424	141	Ammonium dinitro-o-cresolate, solution
3383	131	Poisonous by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone A)							3425	156	Bromoacetic acid, solid
									3426	153P	Acrylamide, solution
									3427	153	Chlorobenzyl chlorides, solid
									3428	156	3-Chloro-4-methylphenyl isocyanate, solid

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3429	153	Chlorotoluidines, liquid	3456	157	Nitrosylsulphuric acid, solid	3468	115	Hydrogen in a metal hydride storage system packed with equipment	3476	138	Fuel cell cartridges, containing water-reactive substances
3430	153	Xylenols, liquid	3457	152	Chloronitrotoluenes, solid	3469	132	Paint, flammable, corrosive	3476	138	Fuel cell cartridges packed with equipment, containing waterreactive substances
3431	152	Nitrobenzotrifluorides, solid	3458	152	Nitroanisoles, solid	3469	132	Paint related material, flammable, corrosive	3477	153	Fuel cell cartridges contained in equipment, containing corrosive substances
3432	171	Polychlorinated biphenyls, solid	3459	152	Nitrobromobenzenes, solid	3470	132	Paint, corrosive, flammable	3477	153	Fuel cell cartridges, containing corrosive substances
3433	135	Lithium alkyls, solid	3460	153	N-Ethylbenzyltoluidines, solid	3470	132	Paint related material, corrosive, flammable	3477	153	Fuel cell cartridges, containing corrosive substances
3434	153	Nitrocresols, liquid	3461	135	Aluminum alkyl halides, solid	3471	154	Hydrogendifluorides, solution, n.o.s.	3477	153	Fuel cell cartridges packed with equipment, containing corrosive substances
3435	153	Hydroquinone, solution	3462	153	Toxins, extracted from living sources, solid, n.o.s.	3472	153	Crotonic acid, liquid	3478	115	Fuel cell cartridges contained in equipment, containing liquefied flammable gas
3436	151	Hexafluoroacetone hydrate, solid	3463	132	Propionic acid, with not less than 90% acid	3473	128	Fuel cell cartridges contained in equipment, containing flammable liquids	3478	115	Fuel cell cartridges, containing liquefied flammable gas
3437	152	Chlorocresols, solid	3464	151	Organophosphorus compound, poisonous, solid, n.o.s.	3473	128	Fuel cell cartridges containing flammable liquids	3478	115	Fuel cell cartridges packed with equipment, containing liquefied flammable gas
3438	153	alpha-Methylbenzyl alcohol, solid	3464	151	Organophosphorus compound, solid, poisonous, n.o.s.	3474	113	1-Hydroxybenzotriazole, anhydrous, wetted with not less than 20% water	3479	115	Fuel cell cartridges contained in equipment, containing hydrogen in metal hydride
3439	151	Nitriles, poisonous, solid, n.o.s.	3464	151	Organophosphorus compound, solid, poisonous, n.o.s.	3475	127	Ethanol and gasoline mixture, with more than 10% ethanol	3479	115	Fuel cell cartridges, containing hydrogen in metal hydride
3439	151	Nitriles, solid, poisonous, n.o.s.	3464	151	Organophosphorus compound, solid, toxic, n.o.s.	3475	127	Ethanol and motor spirit mixture, with more than 10% ethanol	3479	115	Fuel cell cartridges packed with equipment, containing hydrogen in metal hydride
3439	151	Nitriles, solid, toxic, n.o.s.	3464	151	Organophosphorus compound, solid, toxic, n.o.s.	3475	127	Ethanol and petrol mixture, with more than 10% ethanol	3480	147	Lithium ion batteries (including lithium ion polymer batteries)
3440	151	Selenium compound, liquid, n.o.s.	3465	151	Organoarsenic compound, solid, n.o.s.	3475	127	Gasoline and ethanol mixture, with more than 10% ethanol	3481	147	Lithium ion batteries contained in equipment (including lithium ion polymer batteries)
3441	153	Chlorodinitrobenzenes, solid	3466	151	Metal carbonyls, solid, n.o.s.	3475	127	Motor spirit and ethanol mixture, with more than 10% ethanol	3481	147	Lithium ion batteries packed with equipment (including lithium ion polymer batteries)
3442	153	Dichloroanilines, solid	3467	151	Organometallic compound, poisonous, solid, n.o.s.	3476	138	Fuel cell cartridges contained in equipment, containing waterreactive substances	3482	138	Alkali metal dispersion, flammable
3443	152	Dinitrobenzenes, solid	3467	151	Organometallic compound, solid, poisonous, n.o.s.						
3444	151	Nicotine hydrochloride, solid	3467	151	Organometallic compound, solid, toxic, n.o.s.						
3445	151	Nicotine sulfate, solid	3467	151	Organometallic compound, toxic, solid, n.o.s.						
3445	151	Nicotine sulphate, solid	3468	115	Hydrogen in a metal hydride storage system						
3446	152	Nitrotoluenes, solid	3468	115	Hydrogen in a metal hydride storage system contained in equipment						
3447	152	Nitroxyls, solid									
3448	159	Tear gas substance, solid, n.o.s.									
3449	159	Bromobenzyl cyanides, solid									
3450	151	Diphenylchloroarsine, solid									
3451	153	Toluidines, solid									
3452	153	Xylidines, solid									
3453	154	Phosphoric acid, solid									
3454	152	Dinitrotoluenes, solid									
3455	153	Cresols, solid									
3456	157	Nitrosylsulfuric acid, solid									

ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material	ID No.	Guid No.	Name of Material
3482	138	Alkaline earth metal dispersion, flammable	3490	155	Toxic by inhalation liquid, waterreactive, flammable, n.o.s. (Inhalation Hazard Zone A)	3505	118	Chemical under pressure, flammable, corrosive, n.o.s.			
3483	131	Motor fuel anti-knock mixture, flammable	3491	155	Poisonous by inhalation liquid, water-reactive, flammable, n.o.s. (Inhalation Hazard Zone B)	3506	172	Mercury contained in manufactured articles			
3484	132	Hydrazine aqueous solution, flammable, with more than 37% hydrazine, by mass	3491	155	Toxic by inhalation liquid, waterreactive, flammable, n.o.s. (Inhalation Hazard Zone B)	8000	171	Consumer commodity			
3485	140	Calcium hypochlorite, dry, corrosive, with more than 39% available chlorine (8.8% available oxygen)	3492	131	Poisonous by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone A)	9035	123	Gas identification set			
3485	140	Calcium hypochlorite mixture, dry, corrosive, with more than 39% available chlorine (8.8% available oxygen)	3492	131	Toxic by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone A)	9191	143	Chlorine dioxide, hydrate, frozen			
3486	140	Calcium hypochlorite mixture, dry, corrosive, with more than 10% but not more than 39% available chlorine	3493	131	Poisonous by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone B)	9202	168	Carbon monoxide, refrigerated liquid (cryogenic liquid)			
3487	140	Calcium hypochlorite, hydrated, corrosive, with not less than 5.5% but not more than 16% water	3493	131	Toxic by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone B)	9206	137	Methyl phosphonic dichloride			
3487	140	Calcium hypochlorite, hydrated mixture, corrosive, with not less than 5.5% but not more than 16% water	3494	131	Petroleum sour crude oil, flammable, toxic	9260	169	Aluminum, molten			
3488	131	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	3495	154	Iodine	9263	156	Chloropivaloyl chloride			
3488	131	Toxic by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	3496	171	Batteries, nickel-metal hydride	9264	151	3,5-Dichloro-2,4,6-trifluoropyridine			
3489	131	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	3497	133	Krill meal	9269	132	Trimethoxysilane			
3489	131	Toxic by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	3498	157	Iodine monochloride, liquid	9279	115	Hydrogen absorbed in metal hydride			
3490	155	Poisonous by inhalation liquid, water-reactive, flammable, n.o.s. (Inhalation Hazard Zone A)	3499	171	Capacitor, electric double layer						
			3500	126	Chemical under pressure, n.o.s.						
			3501	115	Chemical under pressure, flammable, n.o.s.						
			3502	123	Chemical under pressure, poisonous, n.o.s.						
			3502	123	Chemical under pressure, toxic, n.o.s.						
			3503	125	Chemical under pressure, corrosive, n.o.s.						
			3504	119	Chemical under pressure, flammable, poisonous, n.o.s.						
			3504	119	Chemical under pressure, flammable, toxic, n.o.s.						



## GREEN HIGHLIGHTED ENTRIES IN BLUE PAGES

For entries highlighted in green follow these steps:

- IF THERE IS NO FIRE:
  - Go directly to Table 1 (green bordered pages)
  - Look up the ID number and name of material
  - Identify initial isolation and protective action distances
- IF THERE IS A FIRE or A FIRE IS INVOLVED:
  - Also consult the assigned orange guide
  - If applicable, apply the evacuation information shown under

### PUBLIC SAFETY

Note: If the name in Table 1 is shown with "When Spilled In Water", these materials produce large amounts of Toxic Inhalation Hazard (TIH) gases when spilled in water. Some Water Reactive materials are also TIH materials themselves (e.g., Bromine trifluoride (1746), Thionyl chloride (1836), etc.). In these instances, two entries are provided in Table 1 for land-based and water-based spills. If the Water Reactive material is NOT a TIH and this material is NOT spilled in water, Table 1 and Table 2 do not apply and safety distances will be found within the appropriate orange guide.

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
AC	117	1051	Acrolein dimer, stabilized	129P	2607
Acetal	127	1088	Acrylamide	153P	2074
Acetaldehyde	129	1089	Acrylamide, solid	153P	2074
Acetaldehyde ammonia	171	1841	Acrylamide, solution	153P	3426
Acetaldehyde oxime	129	2332	Acrylic acid, stabilized	132P	2218
Acetic acid, glacial	132	2789	Acrylonitrile, stabilized	131P	1093
Acetic acid, solution, more than 10% but not more than 80% acid	153	2790	<b>Adamsite</b>	<b>154</b>	<b>1698</b>
Acetic acid, solution, more than 80% acid	132	2789	Adhesives (flammable)	128	1133
Acetic anhydride	137	1715	Adiponitrile	153	2205
Acetone	127	1090	Aerosol dispensers	126	1950
<b>Acetone cyanohydrin, stabilized</b>	<b>155</b>	<b>1541</b>	Aerosols	126	1950
Acetone oils	127	1091	Air, compressed	122	1002
Acetonitrile	127	1648	Air, refrigerated liquid (cryogenic liquid)	122	1003
<b>Acetyl bromide</b>	<b>156</b>	<b>1716</b>	Air, refrigerated liquid (cryogenic liquid), non-pressurized	122	1003
<b>Acetyl chloride</b>	<b>155</b>	<b>1717</b>	Air bag inflators	171	3268
Acetylene	116	1001	Air bag inflators, compressed gas	126	3353
Acetylene, dissolved	116	1001	Air bag inflators, pyrotechnic	171	3268
Acetylene, solvent free	116	3374	Air bag modules	171	3268
Acetylene, Ethylene and Propylene in mixture, refrigerated liquid containing at least 71.5% Ethylene with not more than 22.5% Acetylene and not more than 6% Propylene	115	3138	Air bag modules, compressed gas	126	3353
Acetylene tetrabromide	159	2504	Air bag modules, pyrotechnic	171	3268
<b>Acetyl iodide</b>	<b>156</b>	<b>1898</b>	Aircraft hydraulic power unit fuel tank	131	3165
Acetyl methyl carbinol	127	2621	Alcoholates solution, n.o.s., in alcohol	132	3274
Acid, sludge	153	1906	Alcoholic beverages	127	3065
Acid butyl phosphate	153	1718	Alcohols, flammable, poisonous, n.o.s.	131	1986
Acridine	153	2713	Alcohols, flammable, toxic, n.o.s.	131	1986
<b>Acrolein, stabilized</b>	<b>131P</b>	<b>1092</b>	Alcohols, n.o.s.	127	1987
			Alcohols, poisonous, n.o.s.	131	1986



Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Ammonium dinitro-ocresolate, solid	141	1843	Ammonium nitrate fertilizers, with Calcium carbonate	140	2068	Amyl mercaptan	130	1111	Argon, compressed	121	1006
Ammonium dinitro-ocresolate, solution	141	3424	Ammonium nitrate fertilizers, with Phosphate or Potash	143	2070	n-Amyl methyl ketone	127	1110	Argon, refrigerated liquid (cryogenic liquid)	120	1951
Ammonium fluoride	154	2505	Ammonium nitrate-fuel oil mixtures	112	—	Amyl methyl ketone	127	1110	Arsenic	152	1558
Ammonium fluorosilicate	151	2854	Ammonium nitrate gel	140	3375	Amyl nitrate	140	1112	Arsenic acid, liquid	154	1553
Ammonium hydrogendifluoride, solid	154	1727	Ammonium nitrate mixed fertilizers	140	2069	Amyl nitrite	129	1113	Arsenic acid, solid	154	1554
Ammonium hydrogendifluoride, solution	154	2817	Ammonium nitrate suspension	140	3375	Amyltrimethylchlorosilane	155	1728	Arsenical dust	152	1562
Ammonium hydrogen fluoride, solid	154	1727	Ammonium perchlorate	143	1442	Anhydrous ammonia	125	1005	Arsenical pesticide, liquid, flammable, poisonous	131	2760
Ammonium hydrogen fluoride, solution	154	2817	Ammonium persulfate	140	1444	Aniline	153	1547	Arsenical pesticide, liquid, flammable, toxic	131	2760
Ammonium hydrogen sulfate	154	2506	Ammonium persulphate	140	1444	Anisidines	153	2431	Arsenical pesticide, liquid, poisonous	151	2994
Ammonium hydrogen sulphate	154	2506	Ammonium picrate, wetted with not less than 10% water	113	1310	Anisidines, liquid	153	2431	Arsenical pesticide, liquid, poisonous, flammable	131	2993
Ammonium hydroxide	154	2672	Ammonium polysulfide, solution	154	2818	Anisidines, solid	153	2431	Arsenical pesticide, liquid, toxic	151	2994
Ammonium hydroxide, with more than 10% but not more than 35% Ammonia	154	2672	Ammonium polysulphide, solution	154	2818	Anisole	128	2222	Arsenical pesticide, liquid, toxic, flammable	131	2993
Ammonium metavanadate	154	2859	Ammonium polyvanadate	151	2861	Anisoyl chloride	156	1729	Arsenical pesticide, solid, poisonous	151	2759
Ammonium nitrate, liquid (hotconcentrated solution)	140	2426	Ammonium silicofluoride	151	2854	Antimony compound, inorganic, liquid, n.o.s.	157	3141	Arsenical pesticide, solid, toxic	151	2759
Ammonium nitrate, with not more than 0.2% combustible substances	140	1942	Ammonium sulfide, solution	132	2683	Antimony compound, inorganic, solid, n.o.s.	157	1549	Arsenic bromide	151	1555
Ammonium nitrate emulsion	140	3375	Ammonium sulphide, solution	132	2683	Antimony lactate	151	1550	Arsenic chloride	157	1560
Ammonium nitrate fertilizer, n.o.s.	140	2072	Ammunition, poisonous, nonexplosive	151	2016	Antimony pentachloride, liquid	157	1730	Arsenic compound, liquid, n.o.s.	152	1556
Ammonium nitrate fertilizer, with not more than 0.4% combustible material	140	2071	Ammunition, tear-producing, non-explosive	159	2017	Antimony pentachloride, solution	157	1731	Arsenic compound, liquid, n.o.s., inorganic	152	1556
Ammonium nitrate fertilizers	140	2067	Ammunition, toxic, nonexplosive	151	2016	Antimony pentafluoride	157	1732	Arsenic compound, solid, n.o.s.	152	1557
Ammonium nitrate fertilizers	140	2071	Amyl acetates	129	1104	Antimony potassium tartrate	151	1551	Arsenic compound, solid, n.o.s., inorganic	152	1557
Ammonium nitrate fertilizers	140	2072	Amyl acid phosphate	153	2819	Antimony powder	170	2871	Arsenic pentoxide	151	1559
Ammonium nitrate fertilizers, with Ammonium sulfate	140	2069	Amyl alcohols	129	1105	Antimony trichloride	157	1733	Arsenic trichloride	157	1560
Ammonium nitrate fertilizers, with Ammonium sulphate	140	2069	Amylamines	132	1106	Antimony trichloride, liquid	157	1733	Arsenic trioxide	151	1561
			Amyl butyrates	130	2620	Antimony trichloride, solid	157	1733	Arsine	119	2188
			Amyl chloride	129	1107	Antimony trichloride, solution	157	1733			
			n-Amylene	128	1108	Aqua regia	157	1798			
			Amyl formates	129	1109	Argon	121	1006			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Articles containing Polychlorinated biphenyls (PCB)	171	2315	1-Aziridinyl phosphine oxide (Tris)	152	2501	Battery fluid, alkali, with electronic equipment or actuating device	154	2797	Biological substance, category B	158	3373
Articles, pressurized, hydraulic (containing nonflammable gas)	126	3164	Azodicarbonamide	149	3242	Battery-powered equipment (wet battery)	154	3171	(Bio)Medical waste, n.o.s.	158	3291
Articles, pressurized, pneumatic (containing nonflammable gas)	126	3164	Barium	138	1400	Battery-powered vehicle (wet battery)	154	3171	Bipyridilium pesticide, liquid, flammable, poisonous	131	2782
Aryl sulfonic acids, liquid, with more than 5% free Sulfuric acid	153	2584	Barium alloys, pyrophoric	135	1854	Benzaldehyde	129	1990	Bipyridilium pesticide, liquid, flammable, toxic	131	2782
Aryl sulfonic acids, liquid, with not more than 5% free Sulfuric acid	153	2586	Barium azide, wetted with not less than 50% water	113	1571	Benzene	130	1114	Bipyridilium pesticide, liquid, poisonous	151	3016
Aryl sulfonic acids, solid, with more than 5% free Sulfuric acid	153	2583	Barium bromate	141	2719	Benzene phosphorus	137	2798	Bipyridilium pesticide, liquid, poisonous, flammable	131	3015
Aryl sulfonic acids, solid, with not more than 5% free Sulfuric acid	153	2585	Barium chlorate	141	1445	Benzenesulfonyl chloride	156	2225	Bipyridilium pesticide, liquid, toxic	151	3016
Aryl sulphonic acids, liquid, with more than 5% free Sulphuric acid	153	2584	Barium chlorate, solid	141	1445	Benzenesulphonyl chloride	156	2225	Bipyridilium pesticide, liquid, toxic, flammable	131	3015
Aryl sulphonic acids, liquid, with not more than 5% free Sulphuric acid	153	2586	Barium chlorate, solution	141	3405	Benzidine	153	1885	Bipyridilium pesticide, solid, poisonous	151	2781
Aryl sulphonic acids, solid, with more than 5% free Sulphuric acid	153	2583	Barium compound, n.o.s.	154	1564	Benzonitrile	152	2224	Bipyridilium pesticide, solid, toxic	151	2781
Aryl sulphonic acids, solid, with not more than 5% free Sulphuric acid	153	2585	Barium cyanide	157	1565	Benzoquinone	153	2587	Bisulfates, aqueous solution	154	2837
Aryl sulphonic acids, liquid, with more than 5% free Sulphuric acid	153	2584	Barium hypochlorite, with more than 22% available Chlorine	141	2741	Benzotrichloride	156	2226	Bisulfites, aqueous solution, n.o.s.	154	2693
Aryl sulphonic acids, liquid, with not more than 5% free Sulphuric acid	153	2586	Barium nitrate	141	1446	Benzotrifluoride	127	2338	Bisulfites, inorganic, aqueous solution, n.o.s.	154	2693
Aryl sulphonic acids, solid, with more than 5% free Sulphuric acid	153	2583	Barium oxide	157	1884	Benzoyl chloride	137	1736	Bisulphates, aqueous solution	154	2837
Aryl sulphonic acids, solid, with not more than 5% free Sulphuric acid	153	2585	Barium perchlorate	141	1447	Benzyl bromide	156	1737	Bisulphites, aqueous solution, n.o.s.	154	2693
Asbestos	171	2212	Barium perchlorate, solid	141	1447	Benzyl chloride	156	1738	Bisulphites, inorganic, aqueous solution, n.o.s.	154	2693
Asbestos, blue	171	2212	Barium perchlorate, solution	141	3406	Benzyl chloroformate	137	1739	Blasting agent, n.o.s.	112	—
Asbestos, brown	171	2212	Barium permanganate	141	1448	Benzyl dimethylamine	132	2619	Bleaching powder	140	2208
Asbestos, white	171	2590	Barium peroxide	141	1449	Benzylidene chloride	156	1886	Blue asbestos	171	2212
Asphalt	130	1999	Batteries, containing Sodium	138	3292	Benzyl iodide	156	2653	Bombs, smoke, non-explosive, with corrosive liquid, without initiating device	153	2028
Aviation regulated liquid, n.o.s.	171	3334	Batteries, dry, containing Potassium hydroxide solid	154	3028	Beryllium compound, n.o.s.	154	1566	Borate and Chlorate mixtures	140	1458
Aviation regulated solid, n.o.s.	171	3335	Batteries, nickel-metal hydride	171	3496	Beryllium nitrate	141	2464	Borneol	133	1312
			Batteries, wet, filled with acid	154	2794	Beryllium powder	134	1567	Boron tribromide	157	2692
			Batteries, wet, filled with alkali	154	2795	Bhusa, wet, damp or contaminated with oil	133	1327	Boron trichloride	125	1741
			Batteries, wet, non-spillable	154	2800	Bicyclo[2.2.1]hepta-2,5-diene, stabilized	128P	2251			
			Battery fluid, acid	157	2796	Biological agents	158	—			
			Battery fluid, alkali	154	2797						
			Battery fluid, alkali, with battery	154	2797						

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Boron trifluoride	125	1008	Bromobenzyl cyanides	159	1694	n-Butylamine	132	1125	Butyronitrile	131	2411
Boron trifluoride, compressed	125	1008	Bromobenzyl cyanides, liquid	159	1694	N-Butylaniline	153	2738	Butyryl chloride	132	2353
Boron trifluoride, dihydrate	157	2851	Bromobenzyl cyanides, solid	159	1694	Butylbenzenes	128	2709	Buzz	153	2810
Boron trifluoride acetic acid complex	157	1742	Bromobenzyl cyanides, solid	159	3449	n-Butyl bromide	130	1126	BZ	153	2810
Boron trifluoride acetic acid complex, liquid	157	1742	1-Bromobutane	130	1126	Butyl chloride	130	1127	CA	159	1694
Boron trifluoride acetic acid complex, solid	157	3419	2-Bromobutane	130	2339	n-Butyl chloroformate	155	2743	Cacodylic acid	151	1572
Boron trifluoride diethyl etherate	132	2604	Bromochlorodifluoromethane	126	1974	sec-Butyl chloroformate	155	2742	Cadmium compound	154	2570
Boron trifluoride dimethyl etherate	139	2965	Bromochloromethane	160	1887	tert-Butylcyclohexyl chloroformate	156	2747	Caesium	138	1407
Boron trifluoride propionic acid complex	157	1743	1-Bromo-3-chloropropane	159	2688	Butylene	115	1012	Caesium hydroxide	157	2682
Boron trifluoride propionic acid complex, liquid	157	1743	2-Bromoethyl ethyl ether	130	2340	Butylene	115	1075	Caesium hydroxide, solution	154	2681
Boron trifluoride propionic acid complex, solid	157	3420	Bromoform	159	2515	1,2-Butylene oxide, stabilized	127P	3022	Caesium nitrate	140	1451
Bromates, inorganic, aqueous solution, n.o.s.	140	3213	1-Bromo-3-methylbutane	130	2341	Butyl ethers	128	1149	Calcium	138	1401
Bromates, inorganic, n.o.s.	141	1450	Bromomethylpropanes	130	2342	n-Butyl formate	129	1128	Calcium, metal and alloys, pyrophoric	135	1855
Bromine	154	1744	2-Bromo-2-nitropropane-1,3-diol	133	3241	tert-Butyl hypochlorite	135	3255	Calcium, pyrophoric	135	1855
Bromine, solution	154	1744	2-Bromopentane	130	2343	N,n-Butylimidazole	152	2690	Calcium alloys, pyrophoric	135	1855
Bromine, solution (Inhalation Hazard Zone A)	154	1744	2-Bromopropane	129	2344	n-Butyl isocyanate	155	2485	Calcium arsenate	151	1573
Bromine, solution (Inhalation Hazard Zone B)	154	1744	Bromopropanes	129	2344	tert-Butyl isocyanate	155	2484	Calcium arsenate and Calcium arsenite mixture, solid	151	1574
Bromine chloride	124	2901	3-Bromopropyne	130	2345	Butyl mercaptan	130	2347	Calcium arsenite and Calcium arsenate mixture, solid	151	1574
Bromine pentafluoride	144	1745	Bromotrifluoroethylene	116	2419	n-Butyl methacrylate, stabilized	130P	2227	Calcium carbide	138	1402
Bromine trifluoride	144	1746	Bromotrifluoromethane	126	1009	Butyl methyl ether	127	2350	Calcium chlorate	140	1452
Bromoacetic acid	156	1938	Brown asbestos	171	2212	Butyl nitrites	129	2351	Calcium chlorate, aqueous solution	140	2429
Bromoacetic acid, solid	156	3425	Butadienes, stabilized	116P	1010	Butyl propionates	130	1914	Calcium chlorate, solution	140	2429
Bromoacetic acid, solution	156	1938	Butadienes and hydrocarbon mixture, stabilized	116P	1010	Butyltoluenes	152	2667	Calcium chlorite	140	1453
Bromoacetone	131	1569	Butane	115	1011	Butyltrichlorosilane	155	1747	Calcium cyanamide, with morethan 0.1% Calcium carbide	138	1403
Bromoacetyl bromide	156	2513	Butane	115	1075	5-tert-Butyl-2,4,6-trinitro-mxylene	149	2956	Calcium cyanide	157	1575
Bromobenzene	130	2514	Butanedione	127	2346	Butyl vinyl ether, stabilized	127P	2352	Calcium dithionite	135	1923
			Butane mixture	115	1011	1,4-Butynediol	153	2716	Calcium hydride	138	1404
			Butane mixture	115	1075	Butyraldehyde	129	1129	Calcium hydrosulfite	135	1923
			Butanols	129	1120	Butyraldoxime	129	2840	Calcium hydrosulphite	135	1923
			Butyl acetates	129	1123	Butyric acid	153	2820			
			Butyl acid phosphate	153	1718	Butyric anhydride	156	2739			
			Butyl acrylates, stabilized	129P	2348						



Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Calcium hypochlorite, dry	140	1748	Calcium phosphide	139	1360	Carbon dioxide and Ethylene oxide mixture, with more than 9% but not more than 87% Ethylene oxide	115	1041	Caustic potash, dry, solid	154	1813
Calcium hypochlorite, dry, corrosive, with more than 39% available chlorine (8.8% available oxygen)	140	3485	Calcium resinate	133	1313	Carbon dioxide and Ethylene oxide mixture, with more than 87% Ethylene oxide	119P	3300	Caustic potash, liquid	154	1814
Calcium hypochlorite, hydrated, corrosive, with not less than 5.5% but not more than 16% water	140	3487	Calcium resinate, fused	133	1314	Carbon dioxide and Ethylene oxide mixtures, with more than 6% Ethylene oxide	115	1041	Caustic potash, solution	154	1814
Calcium hypochlorite, hydrated, with not less than 5.5% but not more than 16% water	140	2880	Calcium silicide	138	1405	Carbon dioxide and Ethylene oxide mixtures, with not more than 6% Ethylene oxide	126	1952	Caustic soda, bead	154	1823
Calcium hypochlorite, hydrated mixture, corrosive, with not less than 5.5% but not more than 16% water	140	3487	Camphor	133	2717	Carbon dioxide and Ethylene oxide mixtures, with not more than 9% Ethylene oxide	126	1952	Caustic soda, flake	154	1823
Calcium hypochlorite, hydrated mixture, with not less than 5.5% but not more than 16% water	140	2880	Camphor, synthetic	133	2717	Carbon dioxide and Nitrous oxide mixture	126	1015	Caustic soda, granular	154	1823
Calcium hypochlorite mixture, dry, corrosive, with more than 10% but not more than 39% available chlorine	140	3486	Camphor oil	128	1130	Carbon dioxide and Oxygen mixture, compressed	122	1014	Caustic soda, solid	154	1823
Calcium hypochlorite mixture, dry, corrosive, with more than 39% available chlorine (8.8% available oxygen)	140	3485	Capacitor, electric double layer	171	3499	Carbon disulfide	131	1131	Caustic soda, solution	154	1824
Calcium hypochlorite mixture, dry, with more than 10% but not more than 39% available Chlorine	140	2208	Caproic acid	153	2829	Carbon disulphide	131	1131	Cells, containing Sodium	138	3292
Calcium hypochlorite mixture, dry, with more than 39% available Chlorine (8.8% available Oxygen)	140	1748	Carbamate pesticide, liquid, flammable, poisonous	131	2758	Carbon monoxide	119	1016	Celluloid, in blocks, rods, rolls, sheets, tubes, etc., except scrap	133	2000
Calcium manganese silicon	138	2844	Carbamate pesticide, liquid, flammable, toxic	131	2758	Carbon monoxide, compressed	119	1016	Celluloid, scrap	135	2002
Calcium nitrate	140	1454	Carbamate pesticide, liquid, poisonous	151	2992	Carbon monoxide, refrigerated liquid (cryogenic liquid)	168	9202	Cerium, slabs, ingots or rods	170	1333
Calcium oxide	157	1910	Carbamate pesticide, liquid, poisonous, flammable	131	2991	Carbon monoxide and Hydrogen mixture, compressed	119	2600	Cerium, turnings or gritty powder	138	3078
Calcium perchlorate	140	1455	Carbamate pesticide, liquid, toxic, flammable	131	2991	Carbon tetrabromide	151	2516	Cesium	138	1407
Calcium permanganate	140	1456	Carbamate pesticide, solid, poisonous	151	2757	Carbon tetrachloride	151	1846	Cesium hydroxide	157	2682
Calcium peroxide	140	1457	Carbamate pesticide, solid, toxic	151	2757	Carbonyl fluoride	125	2417	Cesium hydroxide, solution	154	2681
			Carbon, activated	133	1362	Carbonyl fluoride, compressed	125	2417	Cesium nitrate	140	1451
			Carbon, animal or vegetable origin	133	1361	Carbonyl sulfide	119	2204	CG	125	1076
			Carbon bisulfide	131	1131	Carbonyl sulphide	119	2204	Charcoal	133	1361
			Carbon bisulphide	131	1131	Castor beans, meal, pomace or flake	171	2969	Chemical kit	154	1760
			Carbon dioxide	120	1013	Caustic alkali liquid, n.o.s.	154	1719	Chemical kit	171	3316
			Carbon dioxide, compressed	120	1013				Chemical sample, poisonous	151	3315
			Carbon dioxide, refrigerated liquid	120	2187				Chemical sample, poisonous liquid	151	3315
			Carbon dioxide, solid	120	1845				Chemical sample, poisonous solid	151	3315
									Chemical sample, toxic	151	3315
									Chemical sample, toxic liquid	151	3315
									Chemical sample, toxic solid	151	3315
									Chemical under pressure, corrosive, n.o.s.	125	3503
									Chemical under pressure, flammable, corrosive, n.o.s.	118	3505

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Chemical under pressure, flammable, n.o.s.	115	3501	Chloroacetic acid, solid	153	1751	Chlorodinitrobenzenes, liquid	153	1577	Chlorophenates, liquid	154	2904
Chemical under pressure, flammable, poisonous, n.o.s.	119	3504	Chloroacetic acid, solution	153	1750	Chlorodinitrobenzenes, solid	153	1577	Chlorophenates, solid	154	2905
Chemical under pressure, flammable, toxic, n.o.s.	119	3504	Chloroacetone, stabilized	131	1695	Chlorodinitrobenzenes, solid	153	3441	Chlorophenolates, liquid	154	2904
Chemical under pressure, n.o.s.	126	3500	Chloroacetoneitrile	131	2668	1-Chloro-2,3-epoxypropane	131P	2023	Chlorophenolates, solid	154	2905
Chemical under pressure, n.o.s.	123	3502	Chloroacetophenone	153	1697	2-Chloroethanal	153	2232	Chlorophenols, liquid	153	2021
Chemical under pressure, n.o.s.	123	3502	Chloroacetophenone, liquid	153	1697	Chloroform	151	1888	Chlorophenols, solid	153	2020
Chemical under pressure, n.o.s.	123	3502	Chloroacetophenone, liquid	153	3416	Chloroformates, n.o.s.	155	2742	Chlorophenyltrichlorosilane	156	1753
Chemical under pressure, n.o.s.	123	3502	Chloroacetophenone, solid	153	1697	Chloroformates, poisonous, corrosive, flammable, n.o.s.	155	2742	Chloropicrin	154	1580
Chemical under pressure, toxic, n.o.s.	123	3502	Chloroacetyl chloride	156	1752	Chloroformates, poisonous, corrosive, n.o.s.	154	3277	Chloropicrin and Methyl bromide mixture	123	1581
Chloral, anhydrous, stabilized	153	2075	Chloroanilines, liquid	152	2019	Chloroformates, toxic, corrosive, flammable, n.o.s.	155	2742	Chloropicrin and Methyl chloride mixture	119	1582
Chlorate and Borate mixtures	140	1458	Chloroanilines, solid	152	2018	Chloroformates, toxic, corrosive, n.o.s.	154	3277	Chloropicrin mixture, n.o.s.	154	1583
Chlorate and Magnesium chloride mixture	140	1459	Chloroanisidines	152	2233	Chloroformates, toxic, corrosive, n.o.s.	154	3277	Chloropivaloyl chloride	156	9263
Chlorate and Magnesium chloride mixture, solid	140	1459	Chlorobenzene	130	1134	Chloromethyl chloroformate	157	2745	Chloroplatinic acid, solid	154	2507
Chlorate and Magnesium chloride mixture, solution	140	3407	Chlorobenzotrifluorides	130	2234	Chloromethyl ethyl ether	131	2354	Chloroprene, stabilized	131P	1991
Chlorates, inorganic, aqueous solution, n.o.s.	140	3210	Chlorobenzyl chlorides	153	2235	3-Chloro-4-methylphenyl isocyanate	156	2236	1-Chloropropane	129	1278
Chlorates, inorganic, n.o.s.	140	1461	Chlorobenzyl chlorides, liquid	153	2235	3-Chloro-4-methylphenyl isocyanate, liquid	156	2236	2-Chloropropane	129	2356
Chloric acid, aqueous solution, with not more than 10% Chloric acid	140	2626	Chlorobenzyl chlorides, solid	153	3427	3-Chloro-4-methylphenyl isocyanate, solid	156	3428	3-Chloropropanol-1	153	2849
Chlorine	124	1017	1-Chloro-3-bromopropane	159	2688	Chloronitroanilines	153	2237	2-Chloropropene	130P	2456
Chlorine dioxide, hydrate, frozen	143	9191	Chlorobutanes	130	1127	Chloronitrobenzenes	152	1578	2-Chloropropionic acid	153	2511
Chlorine pentafluoride	124	2548	Chlorocresols	152	2669	Chloronitrobenzenes, liquid	152	1578	2-Chloropropionic acid, solid	153	2511
Chlorine trifluoride	124	1749	Chlorocresols, liquid	152	2669	Chloronitrobenzenes, liquid	152	3409	2-Chloropropionic acid, solution	153	2511
Chlorite solution	154	1908	Chlorocresols, solid	152	2669	Chloronitrobenzenes, solid	152	1578	2-Chloropyridine	153	2822
Chlorite solution, with more than 5% available Chlorine	154	1908	Chlorocresols, solid	152	3437	Chloronitrobenzenes, liquid	152	3409	Chlorosilanes, corrosive, flammable, n.o.s.	155	2986
Chlorites, inorganic, n.o.s.	143	1462	Chlorocresols, solution	152	2669	Chloronitrobenzenes, liquid	152	3409	Chlorosilanes, corrosive, n.o.s.	156	2987
Chloroacetaldehyde	153	2232	Chlorodifluorobromomethane	126	1974	Chloronitrobenzenes, solid	152	2433	Chlorosilanes, flammable, corrosive, n.o.s.	155	2985
Chloroacetic acid, liquid	153	1750	1-Chloro-1,1-difluoroethane	115	2517	Chloronitrotoluenes	152	2433	Chlorosilanes, n.o.s.	155	2985
Chloroacetic acid, molten	153	3250	Chlorodifluoroethanes	115	2517	Chloronitrotoluenes, liquid	152	2433	Chlorosilanes, n.o.s.	155	2986
			Chlorodifluoromethane	126	1018	Chloronitrotoluenes, solid	152	2433	Chlorosilanes, n.o.s.	156	2987
			Chlorodifluoromethane and Chloropentafluoroethane mixture	126	1973	Chloronitrotoluenes, solid	152	3457			
			Chlorodinitrobenzenes	153	1577	Chloropentafluoroethane	126	1020			
						Chloropentafluoroethane and Chlorodifluoromethane mixture	126	1973			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Chlorosilanes, n.o.s.	139	2988	Chlorotrifluoromethane and Trifluoromethane azeotropic mixture with approximately 60% Chlorotrifluoromethane	126	2599	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone A)	119	1953	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	119	3305
Chlorosilanes, poisonous, corrosive, flammable, n.o.s.	155	3362	Chromic acid, solution	154	1755	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone B)	119	1953	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	119	3305
Chlorosilanes, poisonous, corrosive, n.o.s.	156	3361	Chromic fluoride, solid	154	1756	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone C)	119	1953	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	119	3305
Chlorosilanes, toxic, corrosive, flammable, n.o.s.	155	3362	Chromic fluoride, solution	154	1757	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone D)	119	1953	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	119	3305
Chlorosilanes, toxic, corrosive, n.o.s.	156	3361	Chromium nitrate	141	2720	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone A)	119	1953	Compressed gas, poisonous, flammable, n.o.s.	119	1953
Chlorosilanes, water-reactive, flammable, corrosive, n.o.s.	139	2988	Chromium oxychloride	137	1758	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone B)	119	1953	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	119	1953
Chlorosulfonic acid	137	1754	Chromium trioxide, anhydrous	141	1463	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone C)	119	1953	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	119	1953
Chlorosulfonic acid and Sulfur trioxide mixture	137	1754	Chromosulfuric acid	154	2240	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone D)	119	1953	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	119	1953
Chlorosulphonic acid	137	1754	Chromosulphuric acid	154	2240	Compressed gas, n.o.s.	126	1956	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone D)	119	1953
Chlorosulphonic acid and Sulphur trioxide mixture	137	1754	CK	125	1589	Compressed gas, oxidizing, n.o.s.	122	3156	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone A)	123	1955
1-Chloro-1,2,2,2-tetrafluoroethane	126	1021	Clinical specimens	158	3373	Compressed gas, poisonous, corrosive, n.o.s.	123	3304	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone A)	123	1955
Chlorotetrafluoroethane	126	1021	Clinical waste, unspecified, n.o.s.	158	3291	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone A)	123	3304	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone B)	123	1955
Chlorotetrafluoroethane and Ethylene oxide mixture, with not more than 8.8% Ethylene oxide	126	3297	CN	153	1697	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone B)	123	3304	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone C)	123	1955
Chlorotoluenes	129	2238	Coal gas	119	1023	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone C)	123	3304	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone D)	124	3306
4-Chloro-o-toluidine hydrochloride	153	1579	Coal gas, compressed	119	1023	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone D)	119	1953	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)	124	3306
4-Chloro-o-toluidine hydrochloride, solid	153	1579	Coal tar distillates, flammable	128	1136	Compressed gas, n.o.s.	126	1956			
4-Chloro-o-toluidine hydrochloride, solution	153	3410	Coating solution	127	1139	Compressed gas, oxidizing, n.o.s.	122	3156			
Chlorotoluidines	153	2239	Cobalt naphthenates, powder	133	2001	Compressed gas, poisonous, corrosive, n.o.s.	123	3304			
Chlorotoluidines, liquid	153	2239	Cobalt resinate, precipitated	133	1318	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone A)	123	3304			
Chlorotoluidines, liquid	153	3429	Combustible liquid, n.o.s.	128	1993	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone B)	123	3304			
1-Chloro-2,2,2-trifluoroethane	126	1983	Compound, cleaning liquid (corrosive)	154	1760	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone C)	123	3304			
Chlorotrifluoroethane	126	1983	Compound, cleaning liquid (flammable)	128	1993	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone D)	123	3304			
Chlorotrifluoromethane	126	1022	Compound, tree or weed killing, liquid (corrosive)	154	1760	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone A)	119	1953			
			Compound, tree or weed killing, liquid (flammable)	128	1993	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone B)	119	1953			
			Compound, tree or weed killing, liquid (toxic)	153	2810	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone C)	119	1953			
			Compressed gas, flammable, n.o.s.	115	1954	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone D)	119	1953			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	124	3306	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	119	3305
Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	124	3306	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	119	3305
Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	124	3306	Compressed gas, toxic, flammable, n.o.s.	119	1953
Compressed gas, poisonous, oxidizing, n.o.s.	124	3303	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)	119	1953
Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone A)	124	3303	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	119	1953
Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone B)	124	3303	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	119	1953
Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone C)	124	3303	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	119	1953
Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone D)	124	3303	Compressed gas, toxic, n.o.s.	123	1955
Compressed gas, toxic, corrosive, n.o.s.	123	3304	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone A)	123	1955
Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone A)	123	3304	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone B)	123	1955
Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone B)	123	3304	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone C)	123	1955
Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone C)	123	3304	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone D)	123	1955
Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone D)	123	3304	Compressed gas, toxic, oxidizing, corrosive, n.o.s.	124	3306
Compressed gas, toxic, flammable, corrosive, n.o.s.	119	3305	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)	124	3306
Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	119	3305	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	124	3306
Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	119	3305	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	124	3306
Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	119	3305	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	124	3306

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Compressed gas, toxic, oxidizing, n.o.s.	124	3303	Corrosive liquid, acidic, organic, n.o.s.	153	3265
Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone A)	124	3303	Corrosive liquid, basic, inorganic, n.o.s.	154	3266
Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone B)	124	3303	Corrosive liquid, basic, organic, n.o.s.	153	3267
Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone C)	124	3303	Corrosive liquid, flammable, n.o.s.	132	2920
Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone D)	124	3303	Corrosive liquid, n.o.s.	154	1760
Consumer commodity	171	8000	Corrosive liquid, oxidizing, n.o.s.	140	3093
Copper acetoarsenite	151	1585	Corrosive liquid, poisonous, n.o.s.	154	2922
Copper arsenite	151	1586	Corrosive liquid, self-heating, n.o.s.	136	3301
Copper based pesticide, liquid, flammable, poisonous	131	2776	Corrosive liquid, toxic, n.o.s.	154	2922
Copper based pesticide, liquid, flammable, toxic	131	2776	Corrosive liquid, waterreactive, n.o.s.	138	3094
Copper based pesticide, liquid, poisonous	151	3010	Corrosive liquid, which in contact with water emits flammable gases, n.o.s.	138	3094
Copper based pesticide, liquid, poisonous, flammable	131	3009	Corrosive solid, acidic, inorganic, n.o.s.	154	3260
Copper based pesticide, liquid, toxic	151	3010	Corrosive solid, acidic, organic, n.o.s.	154	3261
Copper based pesticide, liquid, toxic, flammable	131	3009	Corrosive solid, basic, inorganic, n.o.s.	154	3262
Copper based pesticide, solid, poisonous	151	2775	Corrosive solid, basic, organic, n.o.s.	154	3263
Copper based pesticide, solid, toxic	151	2775	Corrosive solid, flammable, n.o.s.	134	2921
Copper chlorate	141	2721	Corrosive solid, n.o.s.	154	1759
Copper chloride	154	2802	Corrosive solid, oxidizing, n.o.s.	140	3084
Copper cyanide	151	1587	Corrosive solid, poisonous, n.o.s.	154	2923
Copra	135	1363	Corrosive solid, self-heating, n.o.s.	136	3095
Corrosive liquid, acidic, inorganic, n.o.s.	154	3264	Corrosive solid, toxic, n.o.s.	154	2923
			Corrosive solid, waterreactive, n.o.s.	138	3096

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Corrosive solid, which in contact with water emits flammable gases, n.o.s.	138	3096	Cumene	130	1918	Cyclopentane	128	1146	Dibromochloropropanes	159	2872
Cotton	133	1365	Cupriethylenediamine, solution	154	1761	Cyclopentanol	129	2244	Dibromodifluoromethane	171	1941
Cotton, wet	133	1365	<b>CX</b>	<b>154</b>	<b>2811</b>	Cyclopentanone	128	2245	Dibromomethane	160	2664
Cotton waste, oily	133	1364	Cyanide solution, n.o.s.	157	1935	Cyclopentene	128	2246	Di-n-butylamine	132	2248
Coumarin derivative pesticide, liquid, flammable, poisonous	131	3024	Cyanides, inorganic, n.o.s.	157	1588	Cyclopropane	115	1027	Dibutylaminoethanol	153	2873
Coumarin derivative pesticide, liquid, flammable, toxic	131	3024	Cyanides, inorganic, solid, n.o.s.	157	1588	<b>DA</b>	<b>151</b>	<b>1699</b>	Dibutyl ethers	128	1149
Coumarin derivative pesticide, liquid, poisonous	151	3026	<b>Cyanogen</b>	<b>119</b>	<b>1026</b>	Dangerous goods in apparatus	171	3363	Dichloroacetic acid	153	1764
Coumarin derivative pesticide, liquid, poisonous, flammable	131	3025	Cyanogen bromide	157	1889	Dangerous goods in machinery	171	3363	1,3-Dichloroacetone	153	2649
Coumarin derivative pesticide, liquid, toxic	151	3026	<b>Cyanogen chloride, stabilized</b>	<b>125</b>	<b>1589</b>	<b>DC</b>	<b>153</b>	<b>2810</b>	<b>Dichloroacetyl chloride</b>	<b>156</b>	<b>1765</b>
Coumarin derivative pesticide, liquid, toxic, flammable	131	3025	<b>Cyanogen gas</b>	<b>119</b>	<b>1026</b>	Decaborane	134	1868	Dichloroanilines	153	1590
Coumarin derivative pesticide, solid, poisonous	151	3027	Cyanuric chloride	157	2670	Decahydronaphthalene	130	1147	Dichloroanilines, liquid	153	1590
Coumarin derivative pesticide, solid, toxic	151	3027	Cyclobutane	115	2601	n-Decane	128	2247	Dichloroanilines, solid	153	1590
Cresols	153	2076	Cyclobutyl chloroformate	155	2744	Desensitized explosive, liquid, n.o.s.	128	3379	Dichloroanilines, solid	153	3442
Cresols, liquid	153	2076	1,5,9-Cyclododecatriene	153	2518	Desensitized explosive, solid, n.o.s.	133	3380	o-Dichlorobenzene	152	1591
Cresols, solid	153	2076	Cycloheptane	128	2241	Deuterium	115	1957	2,2'-Dichlorodiethyl ether	152	1916
Cresols, solid	153	3455	Cycloheptatriene	131	2603	Deuterium, compressed	115	1957	Dichlorodifluoromethane	126	1028
Cresylic acid	153	2022	Cycloheptene	128	2242	Devices, small, hydrocarbon gas powered, with release device	115	3150	Dichlorodifluoromethane and Difluoroethane azeotropic mixture with approximately 74% Dichlorodifluoromethane	126	2602
<b>Crotonaldehyde</b>	<b>131P</b>	<b>1143</b>	Cyclohexane	128	1145	Diacetone alcohol	129	1148	Dichlorodifluoromethane and Ethylene oxide mixture, with not more than 12.5% Ethylene oxide	126	3070
<b>Crotonaldehyde, stabilized</b>	<b>131P</b>	<b>1143</b>	Cyclohexanethiol	129	3054	Diacetyl	127	2346	Dichlorodifluoromethane and Ethylene oxide mixtures, with not more than 12% Ethylene oxide	126	3070
Crotonic acid	153	2823	Cyclohexene	130	2256	Diagnostic specimens	158	3373	Dichlorodimethyl ether, symmetrical	131	2249
Crotonic acid, liquid	153	2823	<b>Cyclohexenyltrichlorosilane</b>	<b>156</b>	<b>1762</b>	Diallylamine	132	2359	1,1-Dichloroethane	130	2362
Crotonic acid, liquid	153	3472	Cyclohexyl acetate	130	2243	Diallyl ether	131P	2360	1,2-Dichloroethylene	130P	1150
Crotonic acid, solid	153	2823	Cyclohexyl isocyanate	155	2488	4,4'-Diaminodiphenylmethane	153	2651	Dichloroethylene	130P	1150
Crotonylene	128	1144	Cyclohexyl mercaptan	129	3054	Di-n-amylamine	131	2841	Dichloroethyl ether	152	1916
<b>CS</b>	<b>153</b>	<b>2810</b>	<b>Cyclohexyltrichlorosilane</b>	<b>156</b>	<b>1763</b>	<b>Dibenzylidichlorosilane</b>	<b>156</b>	<b>2434</b>			
			Cyclooctadiene phosphines	135	2940	<b>Diborane</b>	<b>119</b>	<b>1911</b>			
			Cyclooctadienes	130P	2520	<b>Diborane, compressed</b>	<b>119</b>	<b>1911</b>			
			Cyclooctatetraene	128P	2358	Diborane mixtures	119	1911			
						1,2-Dibromobutan-3-one	154	2648			



Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Dichlorofluoromethane	126	1029	N,N-Diethylaniline	153	2432	Diisopropyl ether	127	1159	Dimethylhydrazine, symmetrical	131	2382
Dichloroisocyanuric acid, dry	140	2465	Diethylbenzene	130	2049	Diketene, stabilized	131P	2521	Dimethylhydrazine, unsymmetrical	131	1163
Dichloroisocyanuric acid salts	140	2465	Diethyl carbonate	128	2366	1,1-Dimethoxyethane	127	2377	2,2-Dimethylpropane	115	2044
Dichloroisopropyl ether	153	2490	Diethyldichlorosilane	155	1767	1,2-Dimethoxyethane	127	2252	Dimethyl-N-propylamine	132	2266
Dichloromethane	160	1593	Diethylenetriamine	154	2079	Dimethylamine, anhydrous	118	1032	Dimethyl sulfate	156	1595
1,1-Dichloro-1-nitroethane	153	2650	Diethyl ether	127	1155	Dimethylamine, aqueous solution	132	1160	Dimethyl sulfide	130	1164
Dichloropentanes	130	1152	N,N-Diethylethylenediamine	132	2685	Dimethylamine, solution	132	1160	Dimethyl sulphate	156	1595
Dichlorophenyl isocyanates	156	2250	Diethyl ketone	127	1156	2-Dimethylaminoacetonitrile	131	2378	Dimethyl sulphide	130	1164
Dichlorophenyltrichlorosilane	156	1766	Diethyl sulfate	152	1594	2-Dimethylaminoethanol	132	2051	Dimethyl thiophosphoryl chloride	156	2267
1,2-Dichloropropane	130	1279	Diethyl sulfide	129	2375	2-Dimethylaminoethyl acrylate	152	3302	Dimethylzinc	135	1370
Dichloropropane	130	1279	Diethyl sulphate	152	1594	2-Dimethylaminoethyl methacrylate	153P	2522	Dinitroanilines	153	1596
1,3-Dichloropropanol-2	153	2750	Diethyl sulphide	129	2375	Dimethylaminoethyl methacrylate	153P	2522	Dinitrobenzenes	152	1597
Dichloropropenes	129	2047	Diethylthiophosphoryl chloride	155	2751	N,N-Dimethylaniline	153	2253	Dinitrobenzenes, liquid	152	1597
Dichlorosilane	119	2189	Diethylzinc	135	1366	2,3-Dimethylbutane	128	2457	Dinitrobenzenes, solid	152	1597
1,2-Dichloro-1,1,2,2-tetrafluoroethane	126	1958	Difluorochloroethanes	115	2517	1,3-Dimethylbutylamine	132	2379	Dinitrobenzenes, solid	152	3443
Dichlorotetrafluoroethane	126	1958	1,1-Difluoroethane	115	1030	Dimethylcarbamoyl chloride	156	2262	Dinitrochlorobenzenes	153	1577
3,5-Dichloro-2,4,6-trifluoropyridine	151	9264	Difluoroethane	115	1030	Dimethyl carbonate	129	1161	Dinitro-o-cresol	153	1598
Dicyclohexylamine	153	2565	Difluoroethane and Dichlorodifluoromethane azeotropic mixture with approximately 74%			Dimethylcyclohexanes	128	2263	Dinitrogen tetroxide	124	1067
Dicyclohexylammonium nitrite	133	2687	Dichlorodifluoromethane	126	2602	N,N-Dimethylcyclohexylamine	132	2264	Dinitrogen tetroxide and Nitric oxide mixture	124	1975
Dicyclopentadiene	130	2048	1,1-Difluoroethylene	116P	1959	Dimethylcyclohexylamine	132	2264	Dinitrophenol, solution	153	1599
1,2-Di-(dimethylamino)ethane	129	2372	Difluoromethane	115	3252	Dimethyldichlorosilane	155	1162	Dinitrophenol, wetted with not less than 15% water	113	1320
Didymium nitrate	140	1465	Difluorophosphoric acid, anhydrous	154	1768	Dimethyldioxanes	127	2380	Dinitrophenolates, wetted with not less than 15% water	113	1321
Diesel fuel	128	1202	2,3-Dihydropyran	127	2376	Dimethyl disulfide	130	2381	Dinitroresorcinol, wetted with not less than 15% water	113	1322
Diethoxymethane	127	2373	Diisobutylamine	132	2361	Dimethyl disulphide	130	2381	Dinitrotoluenes	152	2038
3,3-Diethoxypropene	127	2374	Diisobutylene, isomeric compounds	128	2050	Dimethylethanolamine	132	2051	Dinitrotoluenes, liquid	152	2038
Diethylamine	132	1154	Diisobutyl ketone	128	1157	Dimethyl ether	115	1033	Dinitrotoluenes, molten	152	1600
2-Diethylaminoethanol	132	2686	Diisooctyl acid phosphate	153	1902	N,N-Dimethylformamide	129	2265	Dinitrotoluenes, solid	152	2038
Diethylaminoethanol	132	2686	Diisopropylamine	132	1158	1,1-Dimethylhydrazine	131	1163	Dinitrotoluenes, solid	152	3454
3-Diethylaminopropylamine	132	2684				1,2-Dimethylhydrazine	131	2382			
Diethylaminopropylamine	132	2684									

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Dioxane	127	1165	Disodium trioxosilicate, pentahydrate	154	3253
Dioxolane	127	1166	Dispersant gas, n.o.s.	126	1078
Dipentene	128	2052	Dispersant gas, n.o.s. (flammable)	115	1954
Diphenylamine chloroarsine	154	1698	Dithiocarbamate pesticide, liquid, flammable, poisonous	131	2772
Diphenylchloroarsine	151	1699	Dithiocarbamate pesticide, liquid, flammable, toxic	131	2772
Diphenylchloroarsine, liquid	151	1699	Dithiocarbamate pesticide, liquid, poisonous	151	3006
Diphenylchloroarsine, solid	151	1699	Dithiocarbamate pesticide, liquid, poisonous, flammable	131	3005
Diphenylchloroarsine, solid	151	3450	Dithiocarbamate pesticide, liquid, toxic	151	3006
Diphenyldichlorosilane	156	1769	Dithiocarbamate pesticide, liquid, toxic, flammable	131	3005
Diphenylmethyl bromide	153	1770	Dithiocarbamate pesticide, liquid, toxic, flammable	131	3005
Diphosgene	125	1076	Dithiocarbamate pesticide, solid, poisonous	151	2771
Dipicryl sulfide, wetted with not less than 10% water	113	2852	Dithiocarbamate pesticide, solid, toxic	151	2771
Dipicryl sulphide, wetted with not less than 10% water	113	2852	Divinyl ether, stabilized	128P	1167
Dipropylamine	132	2383	DM	154	1698
Di-n-propyl ether	127	2384	Dodecyltrichlorosilane	156	1771
Dipropyl ether	127	2384	DP	125	1076
Dipropyl ketone	128	2710	Dry ice	120	1845
Disinfectant, liquid, corrosive, n.o.s.	153	1903	Dye, liquid, corrosive, n.o.s.	154	2801
Disinfectant, liquid, poisonous, n.o.s.	151	3142	Dye, liquid, poisonous, n.o.s.	151	1602
Disinfectant, liquid, toxic, n.o.s.	151	3142	Dye, liquid, toxic, n.o.s.	151	1602
Disinfectant, solid, poisonous, n.o.s.	151	1601	Dye, solid, corrosive, n.o.s.	154	3147
Disinfectant, solid, toxic, n.o.s.	151	1601	Dye, solid, poisonous, n.o.s.	151	3143
Disinfectants, corrosive, liquid, n.o.s.	153	1903	Dye, solid, toxic, n.o.s.	151	3143
Disinfectants, liquid, n.o.s. (poisonous)	151	3142	Dye intermediate, liquid, corrosive, n.o.s.	154	2801
Disinfectants, solid, n.o.s. (poisonous)	151	1601	Dye intermediate, liquid, poisonous, n.o.s.	151	1602
Disodium trioxosilicate	154	3253			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Dye intermediate, liquid, toxic, n.o.s.	151	1602	Esters, n.o.s.	127	3272
Dye intermediate, solid, corrosive, n.o.s.	154	3147	Ethane	115	1035
Dye intermediate, solid, poisonous, n.o.s.	151	3143	Ethane, compressed	115	1035
Dye intermediate, solid, toxic, n.o.s.	151	3143	Ethane, refrigerated liquid	115	1961
ED	151	1892	Ethane-Propane mixture, refrigerated liquid	115	1961
Elevated temperature liquid, flammable, n.o.s., with flash point above 37.8oC (100oF), at or above its flash point	128	3256	Ethanol	127	1170
Elevated temperature liquid, flammable, n.o.s., with flash point above 60oC (140oF), at or above its flash point	128	3256	Ethanol and gasoline mixture, with more than 10% ethanol	127	3475
Elevated temperature liquid, n.o.s., at or above 100oC (212oF), and below its flash point	128	3257	Ethanol and motor spirit mixture, with more than 10% ethanol	127	3475
Elevated temperature solid, n.o.s., at or above 240oC (464oF)	171	3258	Ethanol and petrol mixture, with more than 10% ethanol	127	3475
Engine, fuel cell, flammable gas powered	128	3166	Ethanol, solution	127	1170
Engine, fuel cell, flammable liquid powered	128	3166	Ethanolamine	153	2491
Engine, internal combustion	128	3166	Ethers, n.o.s.	127	3271
Engines, internal combustion, flammable gas powered	128	3166	Ethyl acetate	129	1173
Engines, internal combustion, flammable liquid powered	128	3166	Ethylacetylene, stabilized	116P	2452
Environmentally hazardous substances, liquid, n.o.s.	171	3082	Ethyl acrylate, stabilized	129P	1917
Environmentally hazardous substances, solid, n.o.s.	171	3077	Ethyl alcohol	127	1170
Epibromohydrin	131	2558	Ethyl alcohol, solution	127	1170
Epichlorohydrin	131P	2023	Ethylamine	118	1036
1,2-Epoxy-3-ethoxypropane	127	2752	Ethylamine, aqueous solution, with not less than 50% but not more than 70%	132	2270
			Ethylamine	128	2271
			Ethyl amyl ketone	153	2273
			2-Ethylaniline	153	2272
			N-Ethylaniline	130	1175
			Ethylbenzene	153	2274
			N-Ethyl-N-benzylaniline	153	2753
			N-Ethylbenzyltoluidines	153	2753
			N-Ethylbenzyltoluidines, liquid	153	2753
			N-Ethylbenzyltoluidines, solid	153	2753
			N-Ethylbenzyltoluidines, solid	153	3460

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Ethyl borate	129	1176				Ethylene oxide and Propylene oxide mixture, with not more than 30% Ethylene oxide	129P	2983	Ethylsulfuric acid	156	2571
Ethyl bromide	131	1891	Ethylene glycol monoethyl ether	127	1171	Ethylene oxide and Tetrafluoroethane mixture, with not more than 5.6% Ethylene oxide	126	3299	Ethylsulphuric acid	156	2571
Ethyl bromoacetate	155	1603	Ethylene glycol monoethyl ether acetate	129	1172	<b>Ethylene oxide with Nitrogen</b>	119P	1040	N-Ethyltoluidines	153	2754
2-Ethylbutanol	129	2275	Ethylene glycol monomethyl ether	127	1188	Ethyl ether	127	1155	<b>Ethyltrichlorosilane</b>	155	1196
2-Ethylbutyl acetate	130	1177	Ethylene glycol monomethyl ether acetate	129	1189	Ethyl fluoride	115	2453	Explosives, division 1.1, 1.2, 1.3 or 1.5	112	—
Ethylbutyl acetate	130	1177	<b>Ethyleneimine, stabilized</b>	131P	1185	Ethyl formate	129	1190	Explosives, division 1.4 or 1.6	114	—
Ethyl butyl ether	127	1179	<b>Ethylene oxide</b>	119P	1040	Ethylhexaldehydes	129	1191	Extracts, aromatic, liquid	127	1169
2-Ethylbutyraldehyde	130	1178	Ethylene oxide and Carbon dioxide mixture, with more than 9% but not more than 87% Ethylene oxide	115	1041	2-Ethylhexylamine	132	2276	Extracts, flavoring, liquid	127	1197
Ethyl butyrate	130	1180	<b>Ethylene oxide and Carbon dioxide mixture, with more than 87% Ethylene oxide</b>	119P	3300	2-Ethylhexyl chloroformate	156	2748	Extracts, flavouring, liquid	127	1197
Ethyl chloride	115	1037	Ethylene oxide and Carbon dioxide mixtures, with more than 6 % Ethylene oxide	115	1041	Ethyl isobutyrate	129	2385	Fabrics, animal or vegetable or synthetic, n.o.s. with oil	133	1373
<b>Ethyl chloroacetate</b>	155	1181	Ethylene oxide and Carbon dioxide mixtures, with not more than 6% Ethylene oxide	126	1952	<b>Ethyl isocyanate</b>	155	2481	Fabrics impregnated with weakly nitrated Nitrocellulose, n.o.s.	133	1353
Ethyl chloroformate	155	1182	Ethylene oxide and Carbon dioxide mixtures, with not more than 9% Ethylene oxide	126	1952	Ethyl lactate	129	1192	Ferric arsenate	151	1606
Ethyl 2-chloropropionate	129	2935	Ethylene oxide and Chlorotetrafluoroethane mixture, with not more than 8.8% Ethylene oxide	126	3297	Ethyl mercaptan	129	2363	Ferric arsenite	151	1607
<b>Ethyl chlorothioformate</b>	155	2826	Ethylene oxide and Dichlorodifluoromethane mixture, with not more than 12.5% Ethylene oxide	126	3070	Ethyl methacrylate	130P	2277	Ferric chloride	157	1773
Ethyl crotonate	130	1862	Ethylene oxide and Pentafluoroethane mixture, with not more than 7.9% Ethylene oxide	126	3298	Ethyl methacrylate, stabilized	130P	2277	Ferric chloride, anhydrous	157	1773
<b>Ethylidichloroarsine</b>	151	1892				Ethyl methyl ether	115	1039	Ferric chloride, solution	154	2582
<b>Ethylidichlorosilane</b>	139	1183				Ethyl methyl ketone	127	1193	Ferric nitrate	140	1466
Ethylene	116P	1962				Ethyl nitrite, solution	131	1194	Ferrocium	170	1323
Ethylene, Acetylene and Propylene in mixture, refrigerated liquid containing at least 71.5% Ethylene with not more than 22.5% Acetylene and not more than 6% Propylene	115	3138				Ethyl orthoformate	129	2524	Ferrosilicon	139	1408
Ethylene, compressed	116P	1962				Ethyl oxalate	156	2525	Ferrous arsenate	151	1608
Ethylene, refrigerated liquid (cryogenic liquid)	115	1038				<b>Ethylphenyldichlorosilane</b>	156	2435	Ferrous chloride, solid	154	1759
<b>Ethylene chlorohydrin</b>	131	1135				<b>Ethyl phosphonothioic dichloride, anhydrous</b>	154	2927	Ferrous chloride, solution	154	1760
Ethylenediamine	132	1604				Ethyl phosphonous dichloride, anhydrous	135	2845	Ferrous metal borings, shavings, turnings or cuttings	170	2793
<b>Ethylene dibromide</b>	154	1605				<b>Ethyl phosphorodichloridate</b>	154	2927	Fertilizer, ammoniating solution, with free Ammonia	125	1043
<b>Ethylene dibromide and Methyl bromide mixture, liquid</b>	151	1647				1-Ethylpiperidine	132	2386	Fiber, animal or vegetable, n.o.s., burnt, wet or damp	133	1372
Ethylene dichloride	131	1184				Ethyl propionate	129	1195	Fibers, animal or vegetable or synthetic, n.o.s. with oil	133	1373
Ethylene glycol diethyl ether	127	1153				Ethyl propyl ether	127	2615			
						Ethyl silicate	129	1292			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Fibers, animal or vegetable, burnt, wet or damp	133	1372	Flammable solid, corrosive, n.o.s.	134	2925	Fluorotoluenes	130	2388	Fuel cell cartridges, containing water-reactive substances	138	3476
Fibers, vegetable, dry	133	3360	Flammable solid, corrosive, organic, n.o.s.	134	2925	Fluosilicic acid	154	1778	Fuel cell cartridges packed with equipment, containing corrosive substances	153	3477
Fibers impregnated with weakly nitrated Nitrocellulose, n.o.s.	133	1353	Flammable solid, inorganic, corrosive, n.o.s.	134	3180	Formaldehyde, solution, flammable	132	1198	Fuel cell cartridges packed with equipment, containing flammable liquids	128	3473
Fibres, animal or vegetable, burnt, wet or damp	133	1372	Flammable solid, inorganic, n.o.s.	133	3178	Formaldehyde, solutions (Formalin)	132	1198	Fuel cell cartridges packed with equipment, containing hydrogen in metal hydride	115	3479
Fibres, animal or vegetable or synthetic, n.o.s. with oil	133	1373	Flammable solid, n.o.s.	133	1325	Formaldehyde, solutions (Formalin) (corrosive)	132	2209	Fuel cell cartridges packed with equipment, containing liquefied flammable gas	115	3478
Fibres, vegetable, dry	133	3360	Flammable solid, organic, molten, n.o.s.	133	3176	Formic acid	153	1779	Fuel cell cartridges contained in equipment, containing corrosive substances	153	3477
Fibres impregnated with weakly nitrated Nitrocellulose, n.o.s.	133	1353	Flammable solid, organic, n.o.s.	133	1325	Formic acid, with more than 85% acid	153	1779	Fuel cell cartridges contained in equipment, containing flammable liquids	128	3473
Films, nitrocellulose base	133	1324	Flammable solid, oxidizing, n.o.s.	140	3097	Formic acid, with not less than 5% but less than 10% acid	153	3412	Fuel cell cartridges contained in equipment, containing hydrogen in metal hydride	115	3479
Fire extinguisher charges, corrosive liquid	154	1774	Flammable solid, poisonous, inorganic, n.o.s.	134	3179	Formic acid, with not less than 10% but not more than 85% acid	153	3412	Fuel cell cartridges contained in equipment, containing liquefied flammable gas	115	3478
Fire extinguishers with compressed gas	126	1044	Flammable solid, poisonous, n.o.s.	134	2926	Fuel, aviation, turbine engine	128	1863	Fumaryl chloride	156	1780
Fire extinguishers with liquefied gas	126	1044	Flammable solid, poisonous, organic, n.o.s.	134	2926	Fuel cell cartridges contained in equipment, containing corrosive substances	153	3477	Fumigated cargo transport unit	171	3359
Firelighters, solid, with flammable liquid	133	2623	Flammable solid, toxic, inorganic, n.o.s.	134	3179	Fuel cell cartridges contained in equipment, containing hydrogen in metal hydride	115	3479	Fumigated unit	171	3359
First aid kit	171	3316	Flammable solid, toxic, organic, n.o.s.	134	2926	Fuel cell cartridges contained in equipment, containing water-reactive substances	138	3476	Furaldehydes	132P	1199
Fish meal, stabilized	171	2216	Fluoboric acid	154	1775	Fuel cell cartridges, containing corrosive substances	153	3477	Furan	128	2389
Fish meal, unstabilized	133	1374	<b>Fluorine</b>	<b>124</b>	<b>1045</b>	Fuel cell cartridges, containing flammable liquids	128	3473	Furfural	132P	1199
Fish scrap, stabilized	171	2216	<b>Fluorine, compressed</b>	<b>124</b>	<b>1045</b>	Fuel cell cartridges, containing hydrogen in metal hydride	115	3479	Furfuraldehydes	132P	1199
Fish scrap, unstabilized	133	1374	Fluoroacetic acid	154	2642	Fuel cell cartridges, containing liquefied flammable gas	115	3478	Furfuryl alcohol	153	2874
Flammable liquid, corrosive, n.o.s.	132	2924	Fluoroanilines	153	2941	Fuel cell cartridges, containing water-reactive substances	138	3476	Furfurylamine	132	2526
Flammable liquid, n.o.s.	128	1993	Fluorobenzene	130	2387	Fuel cell cartridges, containing corrosive substances	153	3477	Fusee (rail or highway)	133	1325
Flammable liquid, poisonous, corrosive, n.o.s.	131	3286	Fluoroboric acid	154	1775	Fuel cell cartridges, containing flammable liquids	128	3473	Fusel oil	127	1201
Flammable liquid, poisonous, n.o.s.	131	1992	Fluorophosphoric acid, anhydrous	154	1776	Fuel cell cartridges, containing hydrogen in metal hydride	115	3479	<b>GA</b>	<b>153</b>	<b>2810</b>
Flammable liquid, toxic, corrosive, n.o.s.	131	3286	Fluorosilicates, n.o.s.	151	2856	Fuel cell cartridges, containing liquefied flammable gas	115	3478	Gallium	172	2803
Flammable liquid, toxic, n.o.s.	131	1992	Fluorosilicic acid	154	1778				Gas, refrigerated liquid, flammable, n.o.s.	115	3312
Flammable solid, corrosive, inorganic, n.o.s.	134	3180	<b>Fluorosulfonic acid</b>	<b>137</b>	<b>1777</b>				Gas, refrigerated liquid, n.o.s.	120	3158
			<b>Fluorosulphonic acid</b>	<b>137</b>	<b>1777</b>						

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Gas, refrigerated liquid, oxidizing, n.o.s.	122	3311	Hafnium powder, dry	135	2545	Hexafluoroacetone hydrate, solid	151	3436	Hydrazine, aqueous solution, with not more than 37% Hydrazine	152	3293
Gas cartridges	115	2037	Hafnium powder, wetted with not less than 25% water	170	1326	Hexafluoroethane	126	2193	Hydrazine, aqueous solutions, with more than 64% Hydrazine	132	2029
Gas identification set	123	9035	Hay, wet, damp or contaminated with oil	133	1327	Hexafluoroethane, compressed	126	2193	Hydrazine hydrate	153	2030
Gasohol	128	1203	Hazardous waste, liquid, n.o.s.	171	3082	Hexafluorophosphoric acid	154	1782	Hydrides, metal, n.o.s.	138	1409
Gas oil	128	1202	Hazardous waste, solid, n.o.s.	171	3077	Hexafluoropropylene	126	1858	Hydriodic acid	154	1787
Gasoline	128	1203	<b>HD</b>	<b>153</b>	<b>2810</b>	Hexafluoropropylene, compressed	126	1858	Hydriodic acid, solution	154	1787
Gasoline and ethanol mixture, with more than 10% ethanol	127	3475	Heating oil, light	128	1202	Hexaldehyde	130	1207	Hydrobromic acid	154	1788
Gas sample, non-pressurized, flammable, n.o.s., not refrigerated liquid	115	3167	Helium	121	1046	Hexamethylenediamine, solid	153	2280	Hydrobromic acid, solution	154	1788
Gas sample, non-pressurized, poisonous, flammable, n.o.s., not refrigerated liquid	119	3168	Helium, compressed	121	1046	Hexamethylenediamine, solution	153	1783	Hydrocarbon gas, compressed, n.o.s.	115	1964
Gas sample, non-pressurized, poisonous, n.o.s., not refrigerated liquid	123	3169	Helium, refrigerated liquid (cryogenic liquid)	120	1963	Hexamethylene diisocyanate	156	2281	Hydrocarbon gas, liquefied, n.o.s.	115	1965
Gas sample, non-pressurized, toxic, flammable, n.o.s., not refrigerated liquid	119	3168	Heptafluoropropane	126	3296	Hexamethyleneimine	132	2493	Hydrocarbon gas mixture, compressed, n.o.s.	115	1964
Gas sample, non-pressurized, toxic, n.o.s., not refrigerated liquid	123	3169	n-Heptaldehyde	129	3056	Hexamethylenetetramine	133	1328	Hydrocarbon gas mixture, liquefied, n.o.s.	115	1965
<b>GB</b>	<b>153</b>	<b>2810</b>	Heptanes	128	1206	Hexamine	133	1328	Hydrocarbon gas refills for small devices, with release device	115	3150
<b>GD</b>	<b>153</b>	<b>2810</b>	n-Heptene	128	2278	Hexanes	128	1208	Hydrocarbons, liquid, n.o.s.	128	3295
Genetically modified microorganisms	171	3245	Hexachloroacetone	153	2661	Hexanoic acid	153	2829	Hydrochloric acid	157	1789
Genetically modified organisms	171	3245	Hexachlorobenzene	152	2729	Hexanols	129	2282	Hydrochloric acid, solution	157	1789
<b>Germane</b>	<b>119</b>	<b>2192</b>	Hexachlorobutadiene	151	2279	1-Hexene	128	2370	Hydrocyanic acid, aqueous solution, with less than 5% Hydrogen cyanide	154	1613
<b>GF</b>	<b>153</b>	<b>2810</b>	<b>Hexachlorocyclopentadiene</b>	<b>151</b>	<b>2646</b>	<b>Hexyltrichlorosilane</b>	<b>156</b>	<b>1784</b>	<b>Hydrocyanic acid, aqueous solutions, with more than 20% Hydrogen cyanide</b>	<b>117</b>	<b>1051</b>
Glycerol	153	2689	Hexachlorophene	151	2875	<b>HL</b>	<b>153</b>	<b>2810</b>	Hydrofluoric acid	157	1790
alphamonochlorohydrin	131P	2622	<b>Hexadecyltrichlorosilane</b>	<b>156</b>	<b>1781</b>	<b>HN-1</b>	<b>153</b>	<b>2810</b>	Hydrofluoric acid, solution	157	1790
Glycidaldehyde	143	1467	Hexadiene	130	2458	<b>HN-2</b>	<b>153</b>	<b>2810</b>	Hydrofluoric acid and Sulfuric acid mixture	157	1786
Guanidine nitrate	143	1467	Hexaethyl tetraphosphate	151	1611	<b>HN-3</b>	<b>153</b>	<b>2810</b>			
<b>H</b>	<b>153</b>	<b>2810</b>	Hexaethyl tetraphosphate, liquid	151	1611	Hydrazine, anhydrous	132	2029			
			Hexaethyl tetraphosphate, solid	151	1611	Hydrazine aqueous solution, flammable, with more than 37% hydrazine, by mass	132	3484			
			<b>Hexaethyl tetraphosphate and compressed gas mixture</b>	<b>123</b>	<b>1612</b>	Hydrazine, aqueous solution, with more than 37% Hydrazine	153	2030			
			<b>Hexafluoroacetone</b>	<b>125</b>	<b>2420</b>	Hydrazine, aqueous solution, with not less than 37% but not more than 64% Hydrazine	153	2030			
			Hexafluoroacetone hydrate	151	2552						
			Hexafluoroacetone hydrate, liquid	151	2552						



Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Hydrofluoric acid and Sulphuric acid mixture	157	1786	Hydrogendifluorides, solution, n.o.s.	154	3471
Hydrofluorosilicic acid	154	1778	Hydrogen fluoride, anhydrous	125	1052
Hydrogen	115	1049	Hydrogen iodide, anhydrous	125	2197
Hydrogen absorbed in metal hydride	115	9279	Hydrogen peroxide, aqueous solution, stabilized, with more than 60% Hydrogen peroxide	143	2015
Hydrogen, compressed	115	1049	Hydrogen peroxide, aqueous solution, with not less than 8% but less than 20% Hydrogen peroxide	140	2984
Hydrogen in a metal hydride storage system	115	3468	Hydrogen peroxide, aqueous solution, with not less than 20% but not more than 60% Hydrogen peroxide (stabilized as necessary)	140	2014
Hydrogen in a metal hydride storage system contained in equipment	115	3468	Hydrogen peroxide, stabilized	143	2015
Hydrogen in a metal hydride storage system packed with equipment	115	3468	Hydrogen peroxide and Peroxyacetic acid mixture, with acid(s), water and not more than 5% Peroxyacetic acid, stabilized	140	3149
Hydrogen, refrigerated liquid (cryogenic liquid)	115	1966	Hydrogen selenide, anhydrous	117	2202
Hydrogen and Carbon monoxide mixture, compressed	119	2600	Hydrogen sulfide	117	1053
Hydrogen and Methane mixture, compressed	115	2034	Hydrogen sulphide	117	1053
Hydrogen bromide, anhydrous	125	1048	Hydroquinone	153	2662
Hydrogen chloride, anhydrous	125	1050	Hydroquinone, solid	153	2662
Hydrogen chloride, refrigerated liquid	125	2186	Hydroquinone, solution	153	3435
Hydrogen cyanide, anhydrous, stabilized	117	1051	1-Hydroxybenzotriazole, anhydrous, wetted with not less than 20% water	113	3474
Hydrogen cyanide, aqueous solution, with not more than 20% Hydrogen cyanide	154	1613	1-Hydroxybenzotriazole, monohydrate	113	3474
Hydrogen cyanide, solution in alcohol, with not more than 45% Hydrogen cyanide	131	3294	Hydroxylamine sulfate	154	2865
Hydrogen cyanide, stabilized	117	1051	Hydroxylamine sulphate	154	2865
Hydrogen cyanide, stabilized (absorbed)	152	1614	Hypochlorite solution	154	1791
Hydrogendifluorides, n.o.s.	154	1740	Hypochlorite solution, with more than 5% available Chlorine	154	1791
Hydrogendifluorides, solid, n.o.s.	154	1740			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Hypochlorites, inorganic, n.o.s.	140	3212	Insecticide gas, toxic, n.o.s.	123	1967
3,3'-Iminodipropylamine	153	2269	Iodine	154	3495
Infectious substance, affecting animals only	158	2900	Iodine monochloride, liquid	157	3498
Infectious substance, affecting humans	158	2814	Iodine monochloride, solid	157	1792
Ink, printer's, flammable	129	1210	Iodine pentafluoride	144	2495
Insecticide gas, flammable, n.o.s.	115	3354	2-Iodobutane	129	2390
Insecticide gas, n.o.s.	126	1968	Iodomethylpropanes	129	2391
Insecticide gas, poisonous, flammable, n.o.s.	119	3355	Iodopropanes	129	2392
Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	119	3355	IPDI	156	2290
Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	119	3355	Iron oxide, spent	135	1376
Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	119	3355	Iron pentacarbonyl	131	1994
Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	119	3355	Iron sponge, spent	135	1376
Insecticide gas, poisonous, n.o.s.	123	1967	Isobutane	115	1075
Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)	119	3355	Isobutane	115	1969
Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	119	3355	Isobutane mixture	115	1075
Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	119	3355	Isobutane mixture	115	1969
Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	119	3355	Isobutanol	129	1212
			Isobutyl acetate	129	1213
			Isobutyl acrylate, stabilized	129P	2527
			Isobutyl alcohol	129	1212
			Isobutyl aldehyde	130	2045
			Isobutylamine	132	1214
			Isobutyl chloroformate	155	2742
			Isobutylene	115	1055
			Isobutylene	115	1075
			Isobutyl formate	129	2393
			Isobutyl isobutyrate	130	2528
			Isobutyl isocyanate	155	2486
			Isobutyl methacrylate, stabilized	130P	2283
			Isobutyl propionate	129	2394
			Isobutyraldehyde	130	2045
			Isobutyric acid	132	2529

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Isobutyronitrile	131	2284	Isopentenes	128	2371	Lead arsenites	151	1618	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone D)	123	3308
Isobutryl chloride	132	2395	Isophoronediamine	153	2289	Lead compound, soluble, n.o.s.	151	2291	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	119	3309
Isocyanate solution, flammable, poisonous, n.o.s.	155	2478	Isophorone diisocyanate	156	2290	Lead cyanide	151	1620	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	119	3309
Isocyanate solution, flammable, toxic, n.o.s.	155	2478	Isoprene, stabilized	130P	1218	Lead dioxide	141	1872	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	119	3309
Isocyanate solution, poisonous, flammable, n.o.s.	155	3080	Isopropanol	129	1219	Lead nitrate	141	1469	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	119	3309
Isocyanate solution, poisonous, n.o.s.	155	2206	Isopropenyl acetate	129P	2403	Lead perchlorate	141	1470	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	119	3309
Isocyanate solution, toxic, flammable, n.o.s.	155	3080	Isopropenylbenzene	128	2303	Lead perchlorate, solid	141	1470	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	119	3160
Isocyanate solution, toxic, n.o.s.	155	2206	Isopropyl acetate	129	1220	Lead perchlorate, solution	141	1470	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	119	3160
Isocyanate solutions, n.o.s.	155	2206	Isopropyl acid phosphate	153	1793	Lead perchlorate, solution	141	3408	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	119	3160
Isocyanate solutions, n.o.s.	155	2478	Isopropyl alcohol	129	1219	Lead phosphite, dibasic	133	2989	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	119	3160
Isocyanate solutions, n.o.s.	155	3080	Isopropylamine	132	1221	Lead sulfate, with more than 3% free acid	154	1794	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	119	3160
Isocyanates, flammable, poisonous, n.o.s.	155	2478	Isopropylbenzene	130	1918	Lead sulphate, with more than 3% free acid	154	1794	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	119	3160
Isocyanates, flammable, toxic, n.o.s.	155	2478	Isopropyl butyrate	129	2405	Lewisite	153	2810	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	119	3160
Isocyanates, n.o.s.	155	2206	Isopropyl chloroacetate	155	2947	Life-saving appliances, not self-inflating	171	3072	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	119	3160
Isocyanates, n.o.s.	155	2478	Isopropyl chloroformate	155	2407	Life-saving appliances, self-inflating	171	2990	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	119	3162
Isocyanates, n.o.s.	155	3080	Isopropyl 2-chloropropionate	129	2934	Lighter refills (cigarettes) (flammable gas)	115	1057	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	119	3162
Isocyanates, poisonous, flammable, n.o.s.	155	3080	Isopropyl isobutyrate	127	2406	Lighters (cigarettes) (flammable gas)	115	1057	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	119	3162
Isocyanates, poisonous, n.o.s.	155	2206	Isopropyl isocyanate	155	2483	Liquefied gas, flammable, n.o.s.	115	3161	Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	119	3162
Isocyanates, toxic, flammable, n.o.s.	155	3080	Isopropyl nitrate	130	1222	Liquefied gas, n.o.s.	126	3163	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone A)	123	3162
Isocyanatobenzotrifluorides	156	2285	Isosorbide dinitrate mixture	133	2907	Liquefied gas, oxidizing, n.o.s.	122	3157	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone B)	123	3162
Isoheptenes	128	2287	Isosorbide-5-mononitrate	133	3251	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone A)	123	3308	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone C)	123	3162
Isohexenes	128	2288	Kerosene	128	1223	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone B)	123	3308	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone D)	123	3162
Isooctane	128	1262	Ketones, liquid, n.o.s.	127	1224	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone C)	123	3308			
Isooctenes	128	1216	Krill meal	133	3497						
Isopentane	128	1265	Krypton	121	1056						
			Krypton, compressed	121	1056						
			Krypton, refrigerated liquid (cryogenic liquid)	120	1970						
			L (Lewisite)	153	2810						
			Lead acetate	151	1616						
			Lead arsenates	151	1617						

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Liquefied gas, poisonous, oxidizing, corrosive, n.o.s.	124	3310	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	119	3309	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	124	3310	Lithium borohydride	138	1413
Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)	124	3310	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	119	3309	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	124	3310	Lithium ferrosilicon	139	2830
Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	124	3310	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	119	3309	Liquefied gas, toxic, oxidizing, n.o.s.	124	3307	Lithium hydride	138	1414
Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	124	3310	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	119	3309	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone A)	124	3307	Lithium hydride, fused solid	138	2805
Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	124	3310	Liquefied gas, toxic, flammable, n.o.s.	119	3160	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone B)	124	3307	Lithium hydroxide	154	2680
Liquefied gas, poisonous, oxidizing, n.o.s.	124	3307	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)	119	3160	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone C)	124	3307	Lithium hydroxide, monohydrate	154	2680
Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone A)	124	3307	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	119	3160	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone D)	124	3307	Lithium hydroxide, solid	154	2680
Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone B)	124	3307	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	119	3160	Liquefied gases, nonflammable, charged with Nitrogen, Carbon dioxide or Air	120	1058	Lithium hydroxide, solution	154	2679
Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone C)	124	3307	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	119	3160	Liquefied natural gas (cryogenic liquid)	115	1972	Lithium hypochlorite, dry	140	1471
Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone D)	124	3307	Liquefied gas, toxic, n.o.s.	123	3162	Liquefied petroleum gas	115	1075	Lithium hypochlorite mixture	140	1471
Liquefied gas, toxic, corrosive, n.o.s.	123	3308	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone A)	123	3162	Lithium	138	1415	Lithium hypochlorite mixtures, dry	140	1471
Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone A)	123	3308	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone B)	123	3162	Lithium alkyls	135	2445	Lithium ion batteries contained in equipment (including lithium ion polymer batteries)	147	3481
Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone B)	123	3308	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone C)	123	3162	Lithium alkyls, liquid	135	2445	Lithium ion batteries (including lithium ion polymer batteries)	147	3480
Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone C)	123	3308	Liquefied gas, toxic, oxidizing, corrosive, n.o.s.	124	3310	Lithium alkyls, solid	135	3433	Lithium ion batteries packed with equipment (including lithium ion polymer batteries)	147	3481
Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone D)	123	3308	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)	124	3310	Lithium aluminum hydride	138	1410	Lithium metal batteries contained in equipment (including lithium alloy batteries)	138	3091
Liquefied gas, toxic, flammable, corrosive, n.o.s.	119	3309	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	124	3310	Lithium aluminum hydride, ethereal	138	1411	Lithium metal batteries (including lithium alloy batteries)	138	3090
						Lithium batteries	138	3090	Lithium metal batteries packed with equipment (including lithium alloy batteries)	138	3091
						Lithium batteries contained in equipment	138	3091	Lithium nitrate	140	2722
						Lithium batteries, liquid or solid cathode	138	3090	<b>Lithium nitride</b>	<b>138</b>	<b>2806</b>
						Lithium batteries packed with equipment	138	3091	Lithium peroxide	143	1472
									Lithium silicon	138	1417
									LNG (cryogenic liquid)	115	1972

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
London purple	151	1621	Malononitrile	153	2647	Mercaptans, liquid, flammable, n.o.s.	130	3336	Mercury based pesticide, solid, poisonous	151	2777
LPG	115	1075	Maneb	135	2210	Mercaptans, liquid, flammable, poisonous, n.o.s.	131	1228	Mercury based pesticide, solid, toxic	151	2777
Magnesium	138	1869	Maneb, stabilized	135	2968	Mercaptans, liquid, flammable, toxic, n.o.s.	131	1228	Mercury benzoate	154	1631
Magnesium, in pellets, turnings or ribbons	138	1869	Maneb preparation, stabilized	135	2968	Mercaptans, liquid, poisonous, flammable, n.o.s.	131	3071	Mercury bromides	154	1634
Magnesium alkyls	135	3053	Maneb preparation, with not less than 60% Maneb	135	2210	Mercaptans, liquid, toxic, flammable, n.o.s.	131	3071	Mercury compound, liquid, n.o.s.	151	2024
Magnesium alloys, with more than 50% Magnesium, in pellets, turnings or ribbons	138	1869	Manganese nitrate	140	2724	Mercuric arsenate	151	1623	Mercury compound, solid, n.o.s.	151	2025
Magnesium alloys powder	138	1418	Manganese resinate	133	1330	Mercuric bromide	154	1634	Mercury contained in manufactured articles	172	3506
Magnesium aluminum phosphide	139	1419	Matches, fusee	133	2254	Mercuric chloride	154	1624	Mercury cyanide	154	1636
Magnesium arsenate	151	1622	Matches, safety	133	1944	Mercuric cyanide	154	1636	Mercury gluconate	151	1637
Magnesium bromate	140	1473	Matches, "strike anywhere"	133	1331	Mercuric nitrate	141	1625	Mercury iodide	151	1638
Magnesium chlorate	140	2723	Matches, wax "vesta"	133	1945	Mercuric oxycyanide	151	1642	Mercury metal	172	2809
Magnesium chloride and Chlorate mixture	140	1459	MD	152	1556	Mercuric potassium cyanide	157	1626	Mercury nucleate	151	1639
Magnesium chloride and Chlorate mixture, solid	140	1459	Medical waste, n.o.s.	158	3291	Mercuric sulfate	151	1645	Mercury oleate	151	1640
Magnesium chloride and Chlorate mixture, solution	140	3407	Medicine, liquid, flammable, poisonous, n.o.s.	131	3248	Mercuric sulphate	151	1645	Mercury oxide	151	1641
Magnesium diamide	135	2004	Medicine, liquid, flammable, toxic, n.o.s.	131	3248	Mercurous bromide	154	1634	Mercury oxycyanide, desensitized	151	1642
Magnesium diphenyl	135	2005	Medicine, liquid, poisonous, n.o.s.	151	1851	Mercurous nitrate	141	1627	Mercury potassium iodide	151	1643
Magnesium fluorosilicate	151	2853	Medicine, liquid, toxic, n.o.s.	151	1851	Mercury	172	2809	Mercury salicylate	151	1644
Magnesium granules, coated	138	2950	Medicine, solid, poisonous, n.o.s.	151	3249	Mercury acetate	151	1629	Mercury sulfate	151	1645
Magnesium hydride	138	2010	Medicine, solid, toxic, n.o.s.	151	3249	Mercury ammonium chloride	151	1630	Mercury sulphate	151	1645
Magnesium nitrate	140	1474	Mercaptan mixture, liquid, flammable, n.o.s.	130	3336	Mercury based pesticide, liquid, flammable, poisonous	131	2778	Mercury thiocyanate	151	1646
Magnesium perchlorate	140	1475	Mercaptan mixture, liquid, flammable, poisonous, n.o.s.	131	1228	Mercury based pesticide, liquid, flammable, toxic	131	2778	Mesityl oxide	129	1229
Magnesium peroxide	140	1476	Mercaptan mixture, liquid, flammable, toxic, n.o.s.	131	1228	Mercury based pesticide, liquid, poisonous	151	3012	Metal alkyl halides, waterreactive, n.o.s.	138	3049
Magnesium phosphide	139	2011	Mercaptan mixture, liquid, poisonous, flammable, n.o.s.	131	3071	Mercury based pesticide, liquid, flammable	131	3011	Metal alkyl hydrides, waterreactive, n.o.s.	138	3050
Magnesium powder	138	1418	Mercaptan mixture, liquid, toxic, flammable, n.o.s.	131	3071	Mercury based pesticide, liquid, toxic	151	3012	Metal alkyls, water-reactive, n.o.s.	135	2003
Magnesium silicide	138	2624				Mercury based pesticide, liquid, toxic, flammable	131	3011	Metal aryl halides, waterreactive, n.o.s.	138	3049
Magnesium silicofluoride	151	2853							Metal aryl hydrides, waterreactive, n.o.s.	138	3050
Magnetized material	171	2807									
Maleic anhydride	156	2215									
Maleic anhydride, molten	156	2215									

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Metal aryls, water-reactive, n.o.s.	135	2003	4-Methoxy-4-methylpentan-2-one	128	2293	N-Methylbutylamine	132	2945	Methyl iodide	151	2644
Metal carbonyls, liquid, n.o.s.	151	3281	1-Methoxy-2-propanol	129	3092	Methyl tert-butyl ether	127	2398	Methyl isobutyl carbinol	129	2053
Metal carbonyls, n.o.s.	151	3281	Methyl acetate	129	1231	Methyl butyrate	129	1237	Methyl isobutyl ketone	127	1245
Metal carbonyls, solid, n.o.s.	151	3466	Methylacetylene and Propadiene mixture, stabilized	116P	1060	Methyl chloride	115	1063	Methyl isocyanate	155	2480
Metal catalyst, dry	135	2881	Methyl acrylate, stabilized	129P	1919	Methyl chloride and Chloropicrin mixture	119	1582	Methyl isopropenyl ketone, stabilized	127P	1246
Metal catalyst, wetted	170	1378	Methylal	127	1234	Methyl chloride and Methylene chloride mixture	115	1912	Methyl isothiocyanate	131	2477
Metaldehyde	133	1332	Methyl alcohol	131	1230	Methyl chloroacetate	155	2295	Methyl isovalerate	130	2400
Metal hydrides, flammable, n.o.s.	170	3182	Methylallyl chloride	130P	2554	Methyl chloroformate	155	1238	Methyl magnesium bromide in Ethyl ether	135	1928
Metal hydrides, waterreactive, n.o.s.	138	1409	Methylamine, anhydrous	118	1061	Methyl chloromethyl ether	131	1239	Methyl mercaptan	117	1064
Metallic substance, waterreactive, n.o.s.	138	3208	Methylamine, aqueous solution	132	1235	Methyl 2-chloropropionate	129	2933	Methyl methacrylate monomer, stabilized	129P	1247
Metallic substance, waterreactive, self-heating, n.o.s.	138	3209	Methylamyl acetate	130	1233	Methylchlorosilane	119	2534	4-Methylmorpholine	132	2535
Metal powder, flammable, n.o.s.	170	3089	Methylamyl alcohol	129	2053	Methyl cyanide	127	1648	N-Methylmorpholine	132	2535
Metal powder, self-heating, n.o.s.	135	3189	Methyl amyl ketone	127	1110	Methylcyclohexane	128	2296	Methylmorpholine	132	2535
Metal salts of organic compounds, flammable, n.o.s.	133	3181	N-Methylaniline	153	2294	Methylcyclohexanols	129	2617	Methyl nitrite	116	2455
Methacrylaldehyde, stabilized	131P	2396	alpha-Methylbenzyl alcohol	153	2937	Methylcyclohexanone	128	2297	Methyl orthosilicate	155	2606
Methacrylic acid, stabilized	153P	2531	alpha-Methylbenzyl alcohol, liquid	153	2937	Methylcyclopentane	128	2298	Methylpentadiene	128	2461
Methacrylonitrile, stabilized	131P	3079	alpha-Methylbenzyl alcohol, solid	153	3438	Methyl dichloroacetate	155	2299	2-Methylpentan-2-ol	129	2560
Methylallyl alcohol	129	2614	Methylbenzyl alcohol (alpha)	153	2937	Methyldichloroarsine	152	1556	Methylphenyldichlorosilane	156	2437
Methane	115	1971	Methyl bromide	123	1062	Methyldichlorosilane	139	1242	Methyl phosphonic dichloride	137	9206
Methane, compressed	115	1971	Methyl bromide and Chloropicrin mixture	123	1581	Methylene chloride	160	1593	Methyl phosphonous dichloride	135	2845
Methane, refrigerated liquid (cryogenic liquid)	115	1972	Methyl bromide and Ethylene dibromide mixture, liquid	151	1647	Methylene chloride and Methyl chloride mixture	115	1912	1-Methylpiperidine	132	2399
Methane and Hydrogen mixture, compressed	115	2034	Methyl bromoacetate	155	2643	Methyl ethyl ether	115	1039	Methyl propionate	129	1248
Methanesulfonyl chloride	156	3246	2-Methylbutanal	129	3371	Methyl ethyl ketone	127	1193	Methyl propyl ether	127	2612
Methanesulphonyl chloride	156	3246	3-Methylbutan-2-one	127	2397	2-Methyl-5-ethylpyridine	153	2300	Methyl propyl ketone	127	1249
Methanol	131	1230	2-Methyl-1-butene	128	2459	Methyl fluoride	115	2454	Methyltetrahydrofuran	127	2536
Methoxymethyl isocyanate	155	2605	2-Methyl-2-butene	128	2460	Methyl formate	129	1243	Methyl trichloroacetate	156	2533
			3-Methyl-1-butene	128	2561	2-Methylfuran	128	2301	Methyltrichlorosilane	155	1250
						2-Methyl-2-heptanethiol	131	3023	alpha-Methylvaleraldehyde	130	2367
						5-Methylhexan-2-one	127	2302	Methyl valeraldehyde (alpha)	130	2367
						Methylhydrazine	131	1244			



Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Methyl vinyl ketone, stabilized	131P	1251	liquid (cryogenic liquid)	115	1972
M.I.B.C.	129	2053	Neohexane	128	1208
Molybdenum pentachloride	156	2508	Neon	121	1065
Monoethanolamine	153	2491	Neon, compressed	121	1065
Mononitrotoluidines	153	2660	Neon, refrigerated liquid (cryogenic liquid)	120	1913
Monopropylamine	132	1277	Nickel carbonyl	131	1259
Morpholine	132	2054	Nickel catalyst, dry	135	2881
Motor fuel anti-knock mixture	131	1649	Nickel cyanide	151	1653
Motor fuel anti-knock mixture, flammable	131	3483	Nickel nitrate	140	2725
Motor spirit	128	1203	Nickel nitrite	140	2726
Motor spirit and ethanol mixture, with more than 10% ethanol	127	3475	Nicotine	151	1654
Muriatic acid	157	1789	Nicotine compound, liquid, n.o.s.	151	3144
Musk xylene	149	2956	Nicotine compound, solid, n.o.s.	151	1655
Mustard	153	2810	Nicotine hydrochloride	151	1656
Mustard Lewisite	153	2810	Nicotine hydrochloride, liquid	151	1656
Naphthalene, crude	133	1334	Nicotine hydrochloride, solid	151	1656
Naphthalene, molten	133	2304	Nicotine hydrochloride, solid	151	3444
Naphthalene, refined	133	1334	Nicotine hydrochloride, solution	151	1656
alpha-Naphthylamine	153	2077	Nicotine preparation, liquid, n.o.s.	151	3144
Naphthylamine (alpha)	153	2077	Nicotine preparation, solid, n.o.s.	151	1655
beta-Naphthylamine	153	1650	Nicotine salicylate	151	1657
beta-Naphthylamine, solid	153	1650	Nicotine sulfate, solid	151	1658
beta-Naphthylamine, solution	153	3411	Nicotine sulfate, solid	151	3445
Naphthylamine (beta)	153	1650	Nicotine sulfate, solution	151	1658
Naphthylamine (beta), solid	153	1650	Nicotine sulphate, solid	151	1658
Naphthylamine (beta), solution	153	3411	Nicotine sulphate, solid	151	3445
Naphthylthiourea	153	1651	Nicotine sulphate, solution	151	1658
Naphthylurea	153	1652	Nicotine tartrate	151	1659
Natural gas, compressed	115	1971			
Natural gas, refrigerated					

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Nitrates, inorganic, aqueous solution, n.o.s.	140	3218	Nitrates, inorganic, n.o.s.	140	1477
Nitrates, inorganic, n.o.s.	140	1477	Nitrating acid mixture with more than 50% nitric acid	157	1796
Nitrating acid mixture with more than 50% nitric acid	157	1796	Nitrating acid mixture with not more than 50% nitric acid	157	1796
Nitrating acid mixture with not more than 50% nitric acid	157	1796	Nitrating acid mixture, spent, with more than 50% nitric acid	157	1826
Nitrating acid mixture, spent, with more than 50% nitric acid	157	1826	Nitrating acid mixture, spent, with not more than 50% nitric acid	157	1826
Nitric acid, fuming	157	2032	Nitric acid, other than red fuming, with more than 70% nitric acid	157	2031
Nitric acid, other than red fuming, with more than 70% nitric acid	157	2031	Nitric acid, other than red fuming, with not more than 70% nitric acid	157	2031
Nitric acid, red fuming	157	2032	Nitric oxide	124	1660
Nitric oxide	124	1660	Nitric oxide, compressed	124	1660
Nitric oxide, compressed	124	1660	Nitric oxide and Dinitrogen tetroxide mixture	124	1975
Nitric oxide and Dinitrogen tetroxide mixture	124	1975	Nitric oxide and Nitrogen dioxide mixture	124	1975
Nitric oxide and Nitrogen dioxide mixture	124	1975	Nitric oxide and Nitrogen tetroxide mixture	124	1975
Nitric oxide and Nitrogen tetroxide mixture	124	1975	Nitriles, flammable, poisonous, n.o.s.	131	3273
Nitriles, flammable, poisonous, n.o.s.	131	3273	Nitriles, flammable, toxic, n.o.s.	131	3273
Nitriles, flammable, toxic, n.o.s.	131	3273	Nitriles, liquid, poisonous, n.o.s.	151	3276
Nitriles, liquid, poisonous, n.o.s.	151	3276	Nitriles, liquid, toxic, n.o.s.	151	3276
Nitriles, liquid, toxic, n.o.s.	151	3276	Nitriles, poisonous, flammable, n.o.s.	131	3275
Nitriles, poisonous, flammable, n.o.s.	131	3275	Nitriles, poisonous, liquid, n.o.s.	151	3276
Nitriles, poisonous, liquid, n.o.s.	151	3276			
			Nitriles, poisonous, n.o.s.	151	3276
Nitriles, poisonous, n.o.s.	151	3276	Nitriles, poisonous, solid, n.o.s.	151	3439
Nitriles, poisonous, solid, n.o.s.	151	3439	Nitriles, solid, poisonous, n.o.s.	151	3439
Nitriles, solid, poisonous, n.o.s.	151	3439	Nitriles, solid, toxic, n.o.s.	151	3439
Nitriles, solid, toxic, n.o.s.	151	3439	Nitriles, toxic, flammable, n.o.s.	131	3275
Nitriles, toxic, flammable, n.o.s.	131	3275	Nitriles, toxic, liquid, n.o.s.	151	3276
Nitriles, toxic, liquid, n.o.s.	151	3276	Nitriles, toxic, n.o.s.	151	3276
Nitriles, toxic, n.o.s.	151	3276	Nitriles, toxic, solid, n.o.s.	151	3439
Nitriles, toxic, solid, n.o.s.	151	3439	Nitrites, inorganic, aqueous solution, n.o.s.	140	3219
Nitrites, inorganic, aqueous solution, n.o.s.	140	3219	Nitrites, inorganic, n.o.s.	140	2627
Nitrites, inorganic, n.o.s.	140	2627	Nitroanilines	153	1661
Nitroanilines	153	1661	Nitroanisoles	152	2730
Nitroanisoles	152	2730	Nitroanisoles, liquid	152	2730
Nitroanisoles, liquid	152	2730	Nitroanisoles, solid	152	2730
Nitroanisoles, solid	152	2730	Nitroanisoles, solid	152	3458
Nitroanisoles, solid	152	3458	Nitrobenzene	152	1662
Nitrobenzene	152	1662	Nitrobenzenesulfonic acid	153	2305
Nitrobenzenesulfonic acid	153	2305	Nitrobenzenesulphonic acid	153	2305
Nitrobenzenesulphonic acid	153	2305	Nitrobenzotrifluorides	152	2306
Nitrobenzotrifluorides	152	2306	Nitrobenzotrifluorides, liquid	152	2306
Nitrobenzotrifluorides, liquid	152	2306	Nitrobenzotrifluorides, solid	152	3431
Nitrobenzotrifluorides, solid	152	3431	Nitrobromobenzenes	152	2732
Nitrobromobenzenes	152	2732	Nitrobromobenzenes, liquid	152	2732
Nitrobromobenzenes, liquid	152	2732	Nitrobromobenzenes, solid	152	2732
Nitrobromobenzenes, solid	152	2732	Nitrobromobenzenes, solid	152	3459
Nitrobromobenzenes, solid	152	3459	Nitrocellulose	133	2557
Nitrocellulose	133	2557	Nitrocellulose membrane filters	133	3270
Nitrocellulose membrane filters	133	3270	Nitrocellulose mixture, without pigment	133	2557
Nitrocellulose mixture, without pigment	133	2557	Nitrocellulose mixture, without plasticizer	133	2557
Nitrocellulose mixture, without plasticizer	133	2557			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Nitrocellulose mixture, with pigment	133	2557	Nitroglycerin, solution in alcohol, with not more than 1% Nitroglycerin	127	1204	Nitrosylsulphuric acid	157	2308	Organic peroxide type B, liquid	146	3101
Nitrocellulose mixture, with pigment and plasticizer	133	2557	Nitroglycerin mixture, desensitized, liquid, flammable, n.o.s., with not more than 30% Nitroglycerin	113	3343	Nitrosylsulphuric acid, liquid	157	2308	Organic peroxide type B, liquid, temperature controlled	148	3111
Nitrocellulose mixture, with plasticizer	133	2557	Nitroglycerin mixture, desensitized, liquid, n.o.s., with not more than 30% Nitroglycerin	113	3357	Nitrosylsulphuric acid, solid	157	3456	Organic peroxide type B, solid, temperature controlled	148	3112
Nitrocellulose, solution, flammable	127	2059	Nitroglycerin mixture, desensitized, solid, n.o.s., with more than 2% but not more than 10% Nitroglycerin	113	3319	Nitrotoluenes	152	1664	Organic peroxide type C, liquid	146	3103
Nitrocellulose, solution, in a flammable liquid	127	2059	Nitroglycerin mixture with more than 2% but not more than 10% Nitroglycerin, desensitized	113	3319	Nitrotoluenes, liquid	152	1664	Organic peroxide type C, liquid, temperature controlled	148	3113
Nitrocellulose with alcohol	113	2556	Nitroguanidine (Picrite), wetted with not less than 20% water	113	1336	Nitrotoluenes, solid	152	1664	Organic peroxide type C, solid	146	3104
Nitrocellulose with not less than 25% alcohol	113	2556	Nitroguanidine, wetted with not less than 20% water	113	1336	Nitrotoluidines (mono)	153	2660	Organic peroxide type C, solid, temperature controlled	148	3114
Nitrocellulose with water, not less than 25% water	113	2555	Nitrohydrochloric acid	157	1798	Nitrous oxide	122	1070	Organic peroxide type D, liquid	145	3105
3-Nitro-4-chlorobenzotrifluoride	152	2307	Nitromethane	129	1261	Nitrous oxide, compressed	122	1070	Organic peroxide type D, liquid, temperature controlled	148	3115
Nitrocresols	153	2446	Nitronaphthalene	133	2538	Nitrous oxide, refrigerated liquid	122	2201	Organic peroxide type D, solid	145	3106
Nitrocresols, liquid	153	3434	Nitrophenols	153	1663	Nitrous oxide and Carbon dioxide mixture	126	1015	Organic peroxide type D, solid, temperature controlled	148	3116
Nitrocresols, solid	153	2446	4-Nitrophenylhydrazine, with not less than 30% water	113	3376	Nitroxylenes	152	1665	Organic peroxide type E, liquid	145	3107
Nitroethane	129	2842	Nitropropanes	129	2608	Nitroxylenes, liquid	152	1665	Organic peroxide type E, liquid, temperature controlled	148	3117
Nitrogen	121	1066	p-Nitrosodimethylaniline	135	1369	Nitroxylenes, solid	152	1665	Organic peroxide type E, solid, temperature controlled	148	3118
Nitrogen, compressed	121	1066	Nitrostarch, wetted with not less than 20% water	113	1337	Nitroxylenes, solid	152	3447	Organic peroxide type F, liquid	145	3109
Nitrogen, refrigerated liquid (cryogenic liquid)	120	1977	Nitrostarch, wetted with not less than 30% solvent	113	1337	Nonanes	128	1920	Organic peroxide type F, liquid, temperature controlled	148	3119
Nitrogen and Rare gases mixture, compressed	121	1981	Nitrosyl chloride	125	1069	Nonyltrichlorosilane	156	1799	Organic peroxide type F, solid, temperature controlled	148	3120
Nitrogen dioxide	124	1067	Nitrosylsulfuric acid	157	2308	2,5-Norbornadiene, stabilized	128P	2251			
Nitrogen dioxide and Nitric oxide mixture	124	1975	Nitrosylsulfuric acid, liquid	157	2308	Octadecyltrichlorosilane	156	1800			
Nitrogen tetroxide and Nitric oxide mixture	124	1975	Nitrosylsulfuric acid, solid	157	2308	Octadiene	128P	2309			
Nitrogen trifluoride	122	2451	Nitrosylsulfuric acid, solid	157	3456	Octafluorobut-2-ene	126	2422			
Nitrogen trifluoride, compressed	122	2451				Octafluorocyclobutane	126	1976			
Nitrogen trioxide	124	2421				Octafluoropropane	126	2424			
Nitroglycerin, solution in alcohol, with more than 1% but not more than 5% Nitroglycerin	127	3064				Octanes	128	1262			
						Octyl aldehydes	129	1191			
						tert-Octyl mercaptan	131	3023			
						Octyltrichlorosilane	156	1801			
						Oil, petroleum	128	1270			
						Oil gas	119	1071			
						Oil gas, compressed	119	1071			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Organic phosphate compound mixed with compressed gas	123	1955	Organometallic compound, solid, poisonous, n.o.s.	151	3467	Organometallic substance, solid, water-reactive, selfheating	138	3397	Organophosphorus pesticide, solid, toxic	152	2783
Organic phosphate mixed with compressed gas	123	1955	Organometallic compound, solid, toxic, n.o.s.	151	3467	Organophosphorus compound, liquid, poisonous, n.o.s.	151	3278	Organotin compound, liquid, n.o.s.	153	2788
Organic phosphorus compound mixed with compressed gas	123	1955	Organometallic compound, solid, water-reactive, flammable, n.o.s.	138	3372	Organophosphorus compound, liquid, toxic, n.o.s.	151	3278	Organotin compound, solid, n.o.s.	153	3146
Organic pigments, selfheating	135	3313	Organometallic compound, toxic, liquid, n.o.s.	151	3282	Organophosphorus compound, poisonous, flammable, n.o.s.	131	3279	Organotin pesticide, liquid, flammable, poisonous	131	2787
Organoarsenic compound, liquid, n.o.s.	151	3280	Organometallic compound, toxic, n.o.s.	151	3282	Organophosphorus compound, poisonous, liquid, n.o.s.	151	3278	Organotin pesticide, liquid, flammable, toxic	131	2787
Organoarsenic compound, n.o.s.	151	3280	Organometallic compound, toxic, solid, n.o.s.	151	3467	Organophosphorus compound, poisonous, n.o.s.	151	3278	Organotin pesticide, liquid, poisonous	153	3020
Organoarsenic compound, solid, n.o.s.	151	3465	Organometallic compound, water-reactive, flammable, n.o.s.	138	3207	Organophosphorus compound, poisonous, solid, n.o.s.	151	3464	Organotin pesticide, liquid, poisonous, flammable	131	3019
Organochlorine pesticide, liquid, flammable, poisonous	131	2762	Organometallic compound dispersion, water-reactive, flammable, n.o.s.	138	3207	Organophosphorus compound, solid, poisonous, n.o.s.	151	3464	Organotin pesticide, liquid, toxic	153	3020
Organochlorine pesticide, liquid, flammable, toxic	131	2762	Organometallic compound solution, water-reactive, flammable, n.o.s.	138	3207	Organophosphorus compound, solid, toxic, n.o.s.	151	3464	Organotin pesticide, liquid, toxic, flammable	131	3019
Organochlorine pesticide, liquid, poisonous	151	2996	Organometallic substance, liquid, pyrophoric	135	3392	Organophosphorus compound, toxic, flammable, n.o.s.	131	3279	Organotin pesticide, solid, poisonous	153	2786
Organochlorine pesticide, liquid, poisonous, flammable	131	2995	Organometallic substance, liquid, pyrophoric, waterreactive	135	3394	Organophosphorus compound, toxic, liquid, n.o.s.	151	3278	Organotin pesticide, solid, toxic	153	2786
Organochlorine pesticide, liquid, toxic	151	2996	Organometallic substance, liquid, water-reactive	135	3398	Organophosphorus compound, toxic, n.o.s.	151	3278	Osmium tetroxide	154	2471
Organochlorine pesticide, liquid, toxic, flammable	131	2995	Organometallic substance, liquid, water-reactive, flammable	138	3399	Organophosphorus compound, toxic, solid, n.o.s.	151	3464	Other regulated substances, liquid, n.o.s.	171	3082
Organochlorine pesticide, solid, poisonous	151	2761	Organometallic substance, liquid, water-reactive, flammable	138	3399	Organophosphorus pesticide, liquid, flammable, poisonous	131	2784	Other regulated substances, solid, n.o.s.	171	3077
Organochlorine pesticide, solid, toxic	151	2761	Organometallic substance, solid, pyrophoric	135	3391	Organophosphorus pesticide, liquid, flammable, toxic	131	2784	Oxidizing liquid, corrosive, n.o.s.	140	3098
Organometallic compound, liquid, poisonous, n.o.s.	151	3282	Organometallic substance, solid, pyrophoric, waterreactive	135	3393	Organophosphorus pesticide, liquid, poisonous	152	3018	Oxidizing liquid, n.o.s.	140	3139
Organometallic compound, liquid, toxic, n.o.s.	151	3282	Organometallic substance, solid, self-heating	138	3400	Organophosphorus pesticide, liquid, poisonous, flammable	131	3017	Oxidizing liquid, poisonous, n.o.s.	142	3099
Organometallic compound, poisonous, liquid, n.o.s.	151	3282	Organometallic substance, solid, water-reactive	135	3395	Organophosphorus pesticide, liquid, toxic	152	3018	Oxidizing liquid, toxic, n.o.s.	142	3099
Organometallic compound, poisonous, n.o.s.	151	3282	Organometallic substance, solid, water-reactive, flammable	138	3396	Organophosphorus pesticide, liquid, toxic, flammable	3131	3017	Oxidizing solid, corrosive, n.o.s.	140	3085
Organometallic compound, poisonous, solid, n.o.s.	151	3467				Organophosphorus pesticide, solid, poisonous	152	2783	Oxidizing solid, flammable, n.o.s.	140	3137

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Oxidizing solid, toxic, n.o.s.	141	3087	Pentachlorophenol	154	3155	Perfluoro(ethyl vinyl ether)	115	3154	Petroleum distillates, n.o.s.	128	1268
Oxidizing solid, water reactive, n.o.s.	144	3121	Pentaerythrite tetranitrate mixture, desensitized, solid, n.o.s., with more than 10% but not more than 20% PETN	113	3344	Perfluoromethyl vinyl ether	115	3153	Petroleum gases, liquefied	115	1075
Oxygen	122	1072	Pentaerythritol tetranitrate mixture, desensitized, solid, n.o.s., with more than 10% but not more than 20% PETN	113	3344	Perfluoro(methyl vinyl ether)	115	3153	Petroleum oil	128	1270
Oxygen, compressed	122	1072	Pentafluoroethane	126	3220	Perfumery products, with flammable solvents	127	1266	Petroleum products, n.o.s.	128	1268
Oxygen, refrigerated liquid (cryogenic liquid)	122	1073	Pentafluoroethane and Ethylene oxide mixture, with not more than 7.9%			Permanganates, inorganic, aqueous solution, n.o.s.	140	3214	Petroleum sour crude oil, flammable, toxic	131	3494
Oxygen and Carbon dioxide mixture, compressed	122	1014	Ethylene oxide	126	3298	Permanganates, inorganic, n.o.s.	140	1482	Phenacyl bromide	153	2645
Oxygen and Rare gases mixture, compressed	121	1980	Pentamethylheptane	128	2286	Peroxides, inorganic, n.o.s.	140	1483	Phenetidines	153	2311
Oxygen difluoride	124	2190	Pentan-2,4-dione	131	2310	Persulfates, inorganic, aqueous solution, n.o.s.	140	3216	Phenol, molten	153	2312
Oxygen difluoride, compressed	124	2190	n-Pentane	128	1265	Persulfates, inorganic, n.o.s.	140	3215	Phenol, solid	153	1671
Oxygen generator, chemical	140	3356	2,4-Pentanedione	131	2310	Persulphates, inorganic, aqueous solution, n.o.s.	140	3216	Phenol solution	153	2821
Oxygen generator, chemical, spent	140	3356	Pentane-2,4-dione	131	2310	Persulphates, inorganic, n.o.s.	140	3215	Phenolates, liquid	154	2904
Paint (corrosive)	153	3066	Pentanes	128	1265	Pesticide, liquid, flammable, poisonous, n.o.s.	131	3021	Phenolates, solid	154	2905
Paint, corrosive, flammable	132	3470	Pentanols	129	1105	Pesticide, liquid, flammable, toxic, n.o.s.	131	3021	Phenolsulfonic acid, liquid	153	1803
Paint (flammable)	128	1263	1-Pentene	128	1108	Pesticide, liquid, poisonous, flammable, n.o.s.	131	2903	Phenolsulphonic acid, liquid	153	1803
Paint, flammable, corrosive	132	3469	1-Pentol	153P	2705	Pesticide, liquid, poisonous, n.o.s.	151	2902	Phenoxyacetic acid derivative pesticide, liquid, flammable, poisonous	131	3346
Paint related material (corrosive)	153	3066	Perchlorates, inorganic, aqueous solution, n.o.s.	140	3211	Pesticide, liquid, toxic, flammable, n.o.s.	131	2903	Phenoxyacetic acid derivative pesticide, liquid, flammable, toxic	131	3346
Paint related material, corrosive, flammable	132	3470	Perchlorates, inorganic, n.o.s.	140	1481	Pesticide, liquid, toxic, n.o.s.	151	2902	Phenoxyacetic acid derivative pesticide, liquid, poisonous	153	3348
Paint related material (flammable)	128	1263	Perchloric acid, with more than 50% but not more than 72% acid	143	1873	Pesticide, solid, poisonous, n.o.s.	151	2588	Phenoxyacetic acid derivative pesticide, liquid, poisonous, flammable	131	3347
Paint related material, flammable, corrosive	132	3469	Perchloric acid, with not more than 50% acid	140	1802	Pesticide, solid, poisonous, n.o.s.	151	2588	Phenoxyacetic acid derivative pesticide, liquid, toxic	153	3348
Paper, unsaturated oil treated	133	1379	Perchloroethylene	160	1897	Pesticide, solid, toxic, n.o.s.	151	2588	Phenoxyacetic acid derivative pesticide, liquid, toxic, flammable	131	3347
Paraformaldehyde	133	2213	Perchloromethyl mercaptan	157	1670	PETN mixture, desensitized, solid, n.o.s., with more than 10% but not more than 20% PETN	113	3344	Phenoxyacetic acid derivative pesticide, solid, poisonous	153	3345
Paraldehyde	129	1264	Perchloryl fluoride	124	3083	Petrol	128	1203	Phenoxyacetic acid derivative pesticide, solid, toxic	153	3345
Parathion and compressed gas mixture	123	1967	Perfluoroethyl vinyl ether	115	3154	Petrol and ethanol mixture, with more than 10% ethanol	127	3475	Phenylacetone nitrile, liquid	152	2470
PCB	171	2315				Petroleum crude oil	128	1267	Phenylacetyl chloride	156	2577
PD	152	1556							Phenylcarbylamine chloride	151	1672
Pentaborane	135	1380									
Pentachloroethane	151	1669									

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Phenyl chloroformate	156	2746	Phosphorus heptasulfide, free from yellow and white Phosphorus	139	1339	Picric acid, wetted with not less than 10% water	113	3364	Poisonous by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	131	3384
Phenylenediamines	153	1673	Phosphorus heptasulphide, free from yellow and white Phosphorus	139	1339	Picric acid, wetted with not less than 30% water	113	1344	Poisonous by inhalation liquid, n.o.s. (Inhalation Hazard Zone A)	151	3381
Phenylhydrazine	153	2572	Phosphorus oxybromide	137	1939	Picrite, wetted	113	1336	Poisonous by inhalation liquid, n.o.s. (Inhalation Hazard Zone B)	151	3382
Phenyl isocyanate	155	2487	Phosphorus oxybromide, molten	137	2576	Picryl chloride, wetted with not less than 10% water	113	3365	Poisonous by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	142	3387
Phenyl mercaptan	131	2337	Phosphorus oxybromide, solid	137	1939	alpha-Pinene	128	2368	Poisonous by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	142	3388
Phenylmercuric acetate	151	1674	Phosphorus oxychloride	137	1810	Pinene (alpha)	128	2368	Poisonous by inhalation liquid, water-reactive, flammable, n.o.s. (Inhalation Hazard Zone A)	155	3490
Phenylmercuric compound, n.o.s.	151	2026	Phosphorus pentabromide	137	2691	Pine oil	129	1272	Poisonous by inhalation liquid, water-reactive, flammable, n.o.s. (Inhalation Hazard Zone B)	155	3491
Phenylmercuric hydroxide	151	1894	Phosphorus pentachloride	137	1806	Piperazine	153	2579	Poisonous by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)	139	3385
Phenylmercuric nitrate	151	1895	Phosphorus pentachloride	137	1806	Piperidine	132	2401	Poisonous by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)	139	3386
Phenylphosphorus dichloride	137	2798	Phosphorus pentafluoride	125	2198	Plastic molding compound	171	3314	Poisonous liquid, corrosive, inorganic, n.o.s.	154	3289
Phenylphosphorus thiodichloride	137	2799	Phosphorus pentafluoride, compressed	125	2198	Plastic, nitrocellulose-based, spontaneously combustible, n.o.s.	135	2006	Poisonous liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)	154	3289
Phenyltrichlorosilane	156	1804	Phosphorus pentasulfide, free from yellow and white Phosphorus	139	1340	Plastics moulding compound	171	3314	Poisonous liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone B)	154	3289
Phenyl urea pesticide, liquid, poisonous	151	3002	Phosphorus pentasulphide, free from yellow and white Phosphorus	139	1340	Plastics, nitrocellulose-based, self-heating, n.o.s.	135	2006	Poisonous liquid, corrosive, n.o.s.	154	2927
Phenyl urea pesticide, liquid, toxic	151	3002	Phosphorus pentoxide	137	1807	Poisonous by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone A)	131	3492	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)	154	2927
Phosgene	125	1076	Phosphorus sesquisulfide, free from yellow and white Phosphorus	139	1341	Poisonous by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone B)	131	3493	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	2927
9-Phosphabicyclononanes	135	2940	Phosphorus sesquisulphide, free from yellow and white Phosphorus	139	1341	Poisonous by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)	154	3389	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	2927
Phosphine	119	2199	Phosphorus tribromide	137	1808	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	131	3488	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	2927
Phosphoric acid	154	1805	Phosphorus trichloride	137	1809	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	131	3489	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	2927
Phosphoric acid, liquid	154	1805	Phosphorus trioxide	157	2578	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	131	3489	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	2927
Phosphoric acid, solid	154	1805	Phosphorus trisulfide, free from yellow and white Phosphorus	139	1343	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	131	3488	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	2927
Phosphoric acid, solid	154	3453	Phosphorus trisulphide, free from yellow and white Phosphorus	139	1343	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	131	3489	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	2927
Phosphoric acid, solution	154	1805	Phthalic anhydride	156	2214	Poisonous by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	131	3383	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	2927
Phosphorous acid	154	2834	Picolines	129	2313						
Phosphorous acid, ortho	154	2834									
Phosphorus, amorphous	133	1338									
Phosphorus, amorphous, red	133	1338									
Phosphorus, white, dry or under water or in solution	136	1381									
Phosphorus, white, molten	136	2447									
Phosphorus, yellow, dry or under water or in solution	136	1381									



Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Poisonous liquid, corrosive, organic, n.o.s.	154	2927	Poisonous liquid, organic, n.o.s. (Inhalation Hazard Zone B)	153	2810	Poisonous solid, self-heating, n.o.s.	136	3124	Potassium, metal	138	2257
Poisonous liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)	154	2927	Poisonous liquid, oxidizing, n.o.s.	142	3122	Poisonous solid, waterreactive, n.o.s.	139	3125	Potassium, metal alloys	138	1420
Poisonous liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	154	2927	Poisonous liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	142	3122	Poisonous solid, which in contact with water emits flammable gases, n.o.s.	139	3125	Potassium, metal alloys, liquid	138	1420
Poisonous liquid, flammable, n.o.s.	131	2929	Poisonous liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	142	3122	Polyalkylamines, n.o.s.	132	2733	Potassium, metal alloys, solid	138	3403
Poisonous liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	131	2929	Poisonous liquid, waterreactive, n.o.s.	139	3123	Polyalkylamines, n.o.s.	132	2734	Potassium arsenate	151	1677
Poisonous liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	131	2929	Poisonous liquid, waterreactive, n.o.s. (Inhalation Hazard Zone A)	139	3123	Polyalkylamines, n.o.s.	153	2735	Potassium arsenite	154	1678
Poisonous liquid, flammable, organic, n.o.s.	131	2929	Poisonous liquid, which in contact with water emits flammable gases, n.o.s.	139	3123	Polyamines, flammable, corrosive, n.o.s.	132	2733	Potassium borohydride	138	1870
Poisonous liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone A)	131	2929	Poisonous liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone A)	139	3123	Polyamines, liquid, corrosive, flammable, n.o.s.	132	2734	Potassium bromate	140	1484
Poisonous liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone B)	131	2929	Poisonous liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone B)	139	3123	Polyamines, liquid, corrosive, n.o.s.	153	2735	Potassium chlorate	140	1485
Poisonous liquid, inorganic, n.o.s.	151	3287	Poisonous solid, corrosive, inorganic, n.o.s.	154	3290	Polyamines, solid, corrosive, n.o.s.	154	3259	Potassium chlorate, aqueous solution	140	2427
Poisonous liquid, inorganic, n.o.s. (Inhalation Hazard Zone A)	151	3287	Poisonous solid, corrosive, n.o.s.	154	2928	Polychlorinated biphenyls	171	2315	Potassium chlorate, solution	140	2427
Poisonous liquid, inorganic, n.o.s. (Inhalation Hazard Zone B)	151	3287	Poisonous solid, flammable, n.o.s.	134	2930	Polychlorinated biphenyls, liquid	171	2315	Potassium cuprocyanide	157	1679
Poisonous liquid, n.o.s.	153	2810	Poisonous solid, flammable, organic, n.o.s.	134	2930	Polychlorinated biphenyls, solid	171	2315	Potassium cyanide	157	1680
Poisonous liquid, n.o.s. (Inhalation Hazard Zone A)	153	2810	Poisonous solid, inorganic, n.o.s.	151	3288	Polychlorinated biphenyls, solid	171	3432	Potassium cyanide, solid	157	1680
Poisonous liquid, n.o.s. (Inhalation Hazard Zone B)	153	2810	Poisonous solid, organic, n.o.s.	154	2811	Polyester resin kit	128	3269	Potassium cyanide, solution	157	3413
Poisonous liquid, organic, n.o.s.	153	2810	Poisonous solid, oxidizing, n.o.s.	141	3086	Polyhalogenated biphenyls, liquid	171	3151	Potassium dithionite	135	1929
Poisonous liquid, organic, n.o.s. (Inhalation Hazard Zone A)	153	2810				Polyhalogenated biphenyls, solid	171	3152	Potassium fluoride	154	1812
						Polyhalogenated terphenyls, liquid	171	3151	Potassium fluoride, solid	154	1812
						Polyhalogenated terphenyls, solid	171	3152	Potassium fluoride, solution	154	3422
						Polymeric beads, expandable	133	2211	Potassium fluoroacetate	151	2628
						Polystyrene beads, expandable	133	2211	Potassium fluorosilicate	151	2655
						Potassium	138	2257	Potassium hydrogendifluoride	154	1811
									Potassium hydrogen difluoride, solid	154	1811
									Potassium hydrogen difluoride, solution	154	3421
									Potassium hydrogen sulfate	154	2509
									Potassium hydrogen sulphate	154	2509
									Potassium hydrosulfite	135	1929
									Potassium hydrosulphite	135	1929
									Potassium hydroxide, dry, solid	154	1813
									Potassium hydroxide, flake	154	1813
									Potassium hydroxide, solid	154	1813

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Potassium hydroxide, solution	154	1814	Potassium sulphide, hydrated, with not less than 30% water of hydration	153	1847	n-Propyl benzene	128	2364	Pyrethroid pesticide, solid, poisonous	151	3349
Potassium metavanadate	151	2864	Potassium sulphide, with less than 30% water of crystallization	135	1382	Propyl chloride	129	1278	Pyrethroid pesticide, solid, toxic	151	3349
Potassium monoxide	154	2033	Potassium sulphide, with less than 30% water of hydration	135	1382	<b>n-Propyl chloroformate</b>	<b>155</b>	<b>2740</b>	Pyridine	129	1282
Potassium nitrate	140	1486	Potassium superoxide	143	2466	Propylene	115	1075	Pyrophoric alloy, n.o.s.	135	1383
Potassium nitrate and Sodium nitrate mixture	140	1499	Printing ink, flammable	129	1210	Propylene	115	1077	Pyrophoric liquid, inorganic, n.o.s.	135	3194
Potassium nitrate and Sodium nitrite mixture	140	1487	Printing ink related material	129	1210	Propylene, Ethylene and Acetylene in mixture, refrigerated liquid containing at least 71.5% Ethylene with not more than 22.5% Acetylene and not more than 6% Propylene	115	3138	Pyrophoric liquid, n.o.s.	135	2845
Potassium nitrite	140	1488	Propadiene, stabilized	116P	2200	Propylene chlorohydrin	131	2611	Pyrophoric liquid, organic, n.o.s.	135	2845
Potassium perchlorate	140	1489	Propadiene and Methylacetylene mixture, stabilized	116P	1060	1,2-Propylenediamine	132	2258	Pyrophoric metal, n.o.s.	135	1383
Potassium permanganate	140	1490	Propane	115	1075	1,3-Propylenediamine	132	2258	Pyrophoric organometallic compound, water-reactive, n.o.s.	135	3203
Potassium peroxide	144	1491	Propane	115	1978	Propylene dichloride	130	1279	Pyrophoric solid, inorganic, n.o.s.	135	3200
Potassium persulfate	140	1492	Propane-Ethane mixture, refrigerated liquid	115	1961	Propyleneimine, stabilized	131P	1921	Pyrophoric solid, n.o.s.	135	2846
Potassium persulphate	140	1492	Propane mixture	115	1075	Propylene oxide	127P	1280	Pyrophoric solid, organic, n.o.s.	135	2846
<b>Potassium phosphide</b>	<b>139</b>	<b>2012</b>	Propanethiols	130	2402	Propylene oxide and Ethylene oxide mixture, with not more than 30% Ethylene oxide	129P	2983	Pyrosulfuryl chloride	137	1817
Potassium silicofluoride	151	2655	n-Propanol	129	1274	Propylene tetramer	128	2850	Pyrosulphuryl chloride	137	1817
Potassium sodium alloys	138	1422	Propionaldehyde	129	1275	Propyl formates	129	1281	Pyrrolidine	132	1922
Potassium sodium alloys, liquid	138	1422	Propionic acid	132	1848	<b>n-Propyl isocyanate</b>	<b>155</b>	<b>2482</b>	Quinoline	154	2656
Potassium sodium alloys, solid	138	3404	Propionic acid, with not less than 10% and less than 90% acid	132	1848	n-Propyl nitrate	131	1865	Radioactive material, excepted package, articles manufactured from depleted Uranium	161	2909
Potassium sulfide, anhydrous	135	1382	Propionic acid, with not less than 90% acid	132	3463	<b>Propyltrichlorosilane</b>	<b>155</b>	<b>1816</b>	Radioactive material, excepted package, articles manufactured from natural Thorium	161	2909
Potassium sulfide, hydrated, with not less than 30% water of crystallization	153	1847	Propionic anhydride	156	2496	Pyrethroid pesticide, liquid, flammable, poisonous	131	3350	Radioactive material, excepted package, articles manufactured from natural Uranium	161	2909
Potassium sulfide, hydrated, with not less than 30% water of hydration	153	1847	Propionitrile	131	2404	Pyrethroid pesticide, liquid, flammable, toxic	131	3350	Radioactive material, excepted package, articles manufactured from natural Uranium	161	2909
Potassium sulfide, with less than 30% water of crystallization	135	1382	<b>Propionyl chloride</b>	<b>132</b>	<b>1815</b>	Pyrethroid pesticide, liquid, poisonous	151	3352	Radioactive material, excepted package, empty packaging	161	2908
Potassium sulfide, with less than 30% water of hydration	135	1382	n-Propyl acetate	129	1276	Pyrethroid pesticide, liquid, poisonous, flammable	131	3351	Radioactive material, excepted package, empty packaging	161	2910
Potassium sulphide, anhydrous	135	1382	normal Propyl alcohol	129	1274	Pyrethroid pesticide, liquid, toxic	151	3352			
Potassium sulphide, hydrated, with not less than 30% water of crystallization	153	1847	Propyl alcohol, normal	129	1274	Pyrethroid pesticide, liquid, toxic, flammable	131	3351			
			Propylamine	132	1277						

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Radioactive material, excepted package, instruments or articles	161	2910	Radioactive material, surface contaminated objects (SCO-II), non fissile or fissile-excepted	162	2913	Rare gases and Nitrogen mixture, compressed	121	1981	Refrigerant gas R-115	126	1020
Radioactive material, excepted package, instruments or articles	161	2911	Radioactive material, transported under special arrangement, fissile	165	3331	Rare gases and Oxygen mixture, compressed	121	1980	Refrigerant gas R-116	126	2193
Radioactive material, excepted package, limited quantity of material	161	2910	Radioactive material, transported under special arrangement, non fissile or fissile-excepted	163	2919	Rare gases mixture, compressed	121	1979	Refrigerant gas R-116, compressed	126	2193
Radioactive material, fissile, n.o.s.	165	2918	Radioactive material, Type A package, fissile, non-special form	165	3327	Receptacles, small, containing gas	115	2037	Refrigerant gas R-124	126	1021
Radioactive material, low specific activity (LSA), n.o.s.	162	2912	Radioactive material, Type A package non-special form, non fissile or fissileexcepted	163	2915	Red phosphorus	133	1338	Refrigerant gas R-125	126	3220
Radioactive material, low specific activity (LSA-I), non fissile or fissile-excepted	162	2912	Radioactive material, Type A package, special form, fissile	165	3333	Red phosphorus, amorphous	133	1338	Refrigerant gas R-133a	126	1983
Radioactive material, low specific activity (LSA-II), fissile	165	3324	Radioactive material, Type A package, special form, non fissile or fissile-excepted	164	3332	Refrigerant gas, n.o.s.	126	1078	Refrigerant gas R-134a	126	3159
Radioactive material, low specific activity (LSA-II), non fissile or fissileexcepted	162	3321	Radioactive material, Type B(M) package, fissile	165	3329	Refrigerant gas, n.o.s. (flammable)	115	1954	Refrigerant gas R-142b	115	2517
Radioactive material, low specific activity (LSA-III), fissile	165	3325	Radioactive material, Type B(M) package, non fissile or fissile-excepted	163	2917	Refrigerant gas R-12	126	1028	Refrigerant gas R-143a	115	2035
Radioactive material, low specific activity (LSA-III), non fissile or fissile-excepted	162	3322	Radioactive material, Type B(U) package, fissile	165	3328	Refrigerant gas R-12 and Refrigerant gas R-152a azeotropic mixture with 74% Refrigerant gas R-12	126	2602	Refrigerant gas R-152a	115	1030
Radioactive material, n.o.s.	163	2982	Radioactive material, Type B(U) package, non fissile or fissile-excepted	163	2916	Refrigerant gas R-12B1	126	1974	Refrigerant gas R-152a and Refrigerant gas R-12 azeotropic mixture with 74% Refrigerant gas R-12	126	2602
Radioactive material, special form, n.o.s.	164	2974	Radioactive material, Type C package, non fissile or fissile excepted	163	3323	Refrigerant gas R-13	126	1022	Refrigerant gas R-161	115	2453
Radioactive material, surface contaminated objects (SCO)	162	2913	Radioactive material, Type C package, fissile	165	3330	Refrigerant gas R-13 and Refrigerant gas R-23 azeotropic mixture with 60% Refrigerant gas R-13	126	2599	Refrigerant gas R-218	126	2424
Radioactive material, surface contaminated objects (SCO-I), fissile	165	3326	Radioactive material, Uranium hexafluoride	166	2978	Refrigerant gas R-13B1	126	1009	Refrigerant gas R-227	126	3296
Radioactive material, surface contaminated objects (SCO-I), non fissile or fissile-excepted	162	2913	Radioactive material, Uranium hexafluoride, fissile	166	2977	Refrigerant gas R-14	126	1982	Refrigerant gas R-404A	126	3337
Radioactive material, surface contaminated objects (SCO-II), fissile	165	3326	Rags, oily	133	1856	Refrigerant gas R-14, compressed	126	1982	Refrigerant gas R-407A	126	3338
						Refrigerant gas R-21	126	1029	Refrigerant gas R-407B	126	3339
						Refrigerant gas R-22	126	1018	Refrigerant gas R-407C	126	3340
						Refrigerant gas R-23	126	1984	Refrigerant gas R-500 (azeotropic mixture of Refrigerant gas R-12 and Refrigerant gas R-152a with approximately 74% Refrigerant gas R-12)	126	2602
						Refrigerant gas R-23 and Refrigerant gas R-13 azeotropic mixture with 60% Refrigerant gas R-13	126	2599	Refrigerant gas R-502	126	1973
						Refrigerant gas R-32	115	3252	Refrigerant gas R-503 (azeotropic mixture of Refrigerant gas R-13 and Refrigerant gas R-23 with approximately 60% Refrigerant gas R-13)	126	2599
						Refrigerant gas R-40	115	1063	Refrigerant gas R-1132a	116P	1959
						Refrigerant gas R-41	115	2454	Refrigerant gas R-1216	126	1858
						Refrigerant gas R-114	126	1958	Refrigerant gas R-1318	126	2422

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Refrigerant gas RC-318	126	1976	Seed cake, with more than 1.5% oil and not more than 11% moisture	135	1386	Self-heating solid, corrosive, organic, n.o.s.	136	3126	Self-reactive solid type C, temperature controlled	150	3234
Refrigerating machines, containing Ammonia solutions (Un2672)	126	2857	Seed cake, with not more than 1.5% oil and not more than 11% moisture	135	2217	Self-heating solid, inorganic, n.o.s.	135	3190	Self-reactive solid type D	149	3226
Refrigerating machines, containing flammable, nonpoisonous, liquefied gases	115	3358	Selenates	151	2630	Self-heating solid, inorganic, poisonous, n.o.s.	136	3191	Self-reactive solid type D, temperature controlled	150	3236
Refrigerating machines, containing flammable, nontoxic, liquefied gases	115	3358	Selenic acid	154	1905	Self-heating solid, inorganic, toxic, n.o.s.	136	3191	Self-reactive solid type E	149	3228
Refrigerating machines, containing non-flammable, non-poisonous gases	126	2857	Selenites	151	2630	Self-heating solid, organic, n.o.s.	135	3088	Self-reactive solid type E, temperature controlled	150	3238
Refrigerating machines, containing non-flammable, non-toxic gases	126	2857	Selenium compound, liquid, n.o.s.	151	3440	Self-heating solid, oxidizing, n.o.s.	135	3127	Self-reactive solid type F	149	3230
Regulated medical waste, n.o.s.	158	3291	Selenium compound, solid, n.o.s.	151	3283	Self-heating solid, poisonous, inorganic, n.o.s.	136	3191	Self-reactive solid type F, temperature controlled	150	3240
Resin solution	127	1866	Selenium disulfide	153	2657	Self-heating solid, poisonous, organic, n.o.s.	136	3128	Shale oil	128	1288
Resorcinol	153	2876	Selenium disulphide	153	2657	Self-heating solid, toxic, inorganic, n.o.s.	136	3191	Silane	116	2203
Rosin oil	127	1286	<b>Selenium hexafluoride</b>	<b>125</b>	<b>2194</b>	Self-heating solid, toxic, organic, n.o.s.	136	3191	Silicofluorides, n.o.s.	151	2856
Rubber scrap, powdered or granulated	133	1345	Selenium oxychloride	157	2879	Self-heating solid, toxic, organic, n.o.s.	136	3128	Silane, compressed	116	2203
Rubber shoddy, powdered or granulated	133	1345	Self-defense spray, nonpressurized	171	3334	Self-reactive liquid type B	149	3221	Silicon powder, amorphous	170	1346
Rubber solution	127	1287	Self-heating liquid, corrosive, inorganic, n.o.s.	136	3188	Self-reactive liquid type B, temperature controlled	150	3231	<b>Silicon tetrachloride</b>	<b>157</b>	<b>1818</b>
Rubidium	138	1423	Self-heating liquid, corrosive, organic, n.o.s.	136	3185	Self-reactive liquid type C	149	3223	<b>Silicon tetrafluoride</b>	<b>125</b>	<b>1859</b>
Rubidium hydroxide	154	2678	Self-heating liquid, inorganic, n.o.s.	135	3186	Self-reactive liquid type C, temperature controlled	150	3233	<b>Silicon tetrafluoride, compressed</b>	<b>125</b>	<b>1859</b>
Rubidium hydroxide, solid	154	2678	Self-heating liquid, organic, n.o.s.	135	3183	Self-reactive liquid type D	149	3225	Silver arsenite	151	1683
Rubidium hydroxide, solution	154	2677	Self-heating liquid, poisonous, inorganic, n.o.s.	136	3187	Self-reactive liquid type D, temperature controlled	150	3235	Silver cyanide	151	1684
Rubidium metal	138	1423	Self-heating liquid, poisonous, organic, n.o.s.	136	3184	Self-reactive liquid type E	149	3227	Silver nitrate	140	1493
<b>SA</b>	<b>119</b>	<b>2188</b>	Self-heating liquid, toxic, inorganic, n.o.s.	136	3187	Self-reactive liquid type E, temperature controlled	150	3237	Silver picrate, wetted with not less than 30% water	113	1347
<b>Sarin</b>	<b>153</b>	<b>2810</b>	Self-heating liquid, toxic, organic, n.o.s.	136	3184	Self-reactive liquid type F	149	3229	Sludge acid	153	1906
Seat-belt modules	171	3268	Self-heating metal powders, n.o.s.	135	3189	Self-reactive liquid type F, temperature controlled	150	3239	Smokeless powder for small arms	133	3178
Seat-belt pre-tensioners	171	3268	Self-heating solid, corrosive, inorganic, n.o.s.	136	3192	Self-reactive solid type B	149	3222	Soda lime, with more than 4% Sodium hydroxide	154	1907
Seat-belt pre-tensioners, compressed gas	126	3353				Self-reactive solid type B, temperature controlled	150	3232	Sodium	138	1428
Seat-belt pre-tensioners, pyrotechnic	171	3268				Self-reactive solid type C	149	3224	Sodium aluminate, solid	154	2812
									Sodium aluminate, solution	154	1819
									Sodium aluminum hydride	138	2835
									Sodium ammonium vanadate	154	2863
									Sodium arsanilate	154	2473
									Sodium arsenate	151	1685

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Sodium arsenite, aqueous solution	154	1686	Sodium dinitro-orthocresolate, wetted	113	1348	Sodium hydroxide, solution	154	1824	Sodium sulphide, hydrated, with not less than 30% water	153	1849
Sodium arsenite, solid	151	2027	<b>Sodium dithionite</b>	<b>135</b>	<b>1384</b>	Sodium methylate	138	1431	Sodium sulphide, with less than 30% water of crystallization	135	1385
Sodium azide	153	1687	Sodium fluoride	154	1690	Sodium methylate, dry	138	1431	Sodium superoxide	143	2547
Sodium bisulfate, solution	154	2837	Sodium fluoride, solid	154	1690	Sodium methylate, solution in alcohol	132	1289	Solids containing corrosive liquid, n.o.s.	154	3244
Sodium bisulphate, solution	154	2837	Sodium fluoride, solution	154	3415	Sodium monoxide	157	1825	Solids containing flammable liquid, n.o.s.	133	3175
Sodium borohydride	138	1426	Sodium fluoroacetate	151	2629	Sodium nitrate	140	1498	Solids containing poisonous liquid, n.o.s.	151	3243
Sodium borohydride and Sodium hydroxide solution, with not more than 12% Sodium borohydride and not more than 40% Sodium hydroxide	157	3320	Sodium fluorosilicate	154	2674	Sodium nitrate and Potassium nitrate mixture	140	1499	Solids containing toxic liquid, n.o.s.	151	3243
Sodium bromate	141	1494	Sodium hydride	138	1427	Sodium nitrite 140 1500 Sodium nitrite and Potassium nitrate mixture	140	1487	<b>Soman</b>	<b>153</b>	<b>2810</b>
Sodium cacodylate	152	1688	Sodium hydrogendifluoride	154	2439	Sodium pentachlorophenate	154	2567	Stannic chloride, anhydrous	137	1827
Sodium carbonate peroxyhydrate	140	3378	Sodium hydrogen sulfate, solution	154	2837	Sodium perborate monohydrate	140	3377	Stannic chloride, pentahydrate	154	2440
Sodium chlorate	140	1495	Sodium hydrogen sulphate, solution	154	2837	Sodium perchlorate	140	1502	Stannic phosphides	139	1433
Sodium chlorate, aqueous solution	140	2428	Sodium hydrosulfide, solid, with less than 25% water of crystallization	135	2318	Sodium permanganate	140	1503	<b>Stibine</b>	<b>119</b>	<b>2676</b>
Sodium chlorite	143	1496	Sodium hydrosulfide, with less than 25% water of crystallization	135	2318	Sodium peroxide	144	1504	Straw, wet, damp or contaminated with oil	133	1327
Sodium chlorite, solution, with more than 5% available Chlorine	154	1908	Sodium hydrosulfide, with not less than 25% water of crystallization	154	2949	Sodium peroxoborate, anhydrous	140	3247	Strontium arsenite	151	1691
Sodium chloroacetate	151	2659	<b>Sodium hydrosulfite</b>	<b>135</b>	<b>1384</b>	Sodium persulfate	140	1505	Strontium chlorate	143	1506
Sodium cuprocyanide, solid	157	2316	Sodium hydrosulphide, solid, with less than 25% water of crystallization	135	2318	Sodium persulphate	140	1505	Strontium chlorate, solid	143	1506
Sodium cuprocyanide, solution	157	2317	Sodium hydrosulphide, with less than 25% water of crystallization	135	2318	<b>Sodium phosphide</b>	<b>139</b>	<b>1432</b>	Strontium chlorate, solution	143	1506
<b>Sodium cyanide</b>	<b>157</b>	<b>1689</b>	Sodium hydrosulphide, with not less than 25% water of crystallization	154	2949	Sodium picramate, wetted with not less than 20% water	113	1349	Strontium nitrate	140	1507
<b>Sodium cyanide, solid</b>	<b>157</b>	<b>1689</b>	<b>Sodium hydrosulphite</b>	<b>135</b>	<b>1384</b>	Sodium potassium alloys	138	1422	Strontium perchlorate	140	1508
Sodium cyanide, solution	157	3414	Sodium hydroxide, bead	154	1823	Sodium potassium alloys, liquid	138	1422	Strontium peroxide	143	1509
Sodium dichloroisocyanurate	140	2465	Sodium hydroxide, dry	154	1823	Sodium potassium alloys, solid	138	3404	<b>Strontium phosphide</b>	<b>139</b>	<b>2013</b>
Sodium dichloro-striazinetrione	140	2465	Sodium hydroxide, flake	154	1823	Sodium silicofluoride	154	2674	Strychnine	151	1692
Sodium dinitro-o-cresolate, wetted with not less than 10% water	113	3369	Sodium hydroxide, granular	154	1823	Sodium sulfide, anhydrous	135	1385	Strychnine salts	151	1692
Sodium dinitro-o-cresolate, wetted with not less than 15% water	113	1348	Sodium hydroxide, solid	154	1823	Sodium sulfide, hydrated, with not less than 30% water	153	1849	Styrene monomer, stabilized	128P	2055
						Sodium sulfide, with less than 30% water of crystallization	135	1385	Substituted nitrophenol pesticide, liquid, flammable, poisonous	131	2780
						Sodium sulphide, anhydrous	135	1385			



Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Substituted nitrophenol pesticide, liquid, flammable, toxic	131	2780	Sulfur tetrafluoride	125	2418
Substituted nitrophenol pesticide, liquid, poisonous	153	3014	Sulfur trioxide, stabilized	137	1829
Substituted nitrophenol pesticide, liquid, poisonous, flammable	131	3013	Sulfur trioxide and Chlorosulfonic acid mixture	137	1754
Substituted nitrophenol pesticide, liquid, toxic	153	3014	Sulfuryl chloride	137	1834
Substituted nitrophenol pesticide, liquid, toxic, flammable	131	3013	Sulfuryl fluoride	123	2191
Substituted nitrophenol pesticide, solid, poisonous	153	2779	Sulphamic acid	154	2967
Substituted nitrophenol pesticide, solid, toxic	153	2779	Sulphur	133	1350
Sulfamic acid	154	2967	Sulphur, molten	133	2448
Sulfur	133	1350	Sulphur chlorides	137	1828
Sulfur, molten	133	2448	Sulphur dioxide	125	1079
Sulfur chlorides	137	1828	Sulphur hexafluoride	126	1080
Sulfur dioxide	125	1079	Sulphuric acid	137	1830
Sulfur hexafluoride	126	1080	Sulphuric acid, fuming	137	1831
Sulfuric acid	137	1830	Sulphuric acid, fuming, with less than 30% free Sulphur trioxide	137	1831
Sulfuric acid, fuming	137	1831	Sulphuric acid, fuming, with not less than 30% free Sulphur trioxide	137	1831
Sulfuric acid, fuming, with less than 30% free Sulphur trioxide	137	1831	Sulphuric acid, spent	137	1832
Sulfuric acid, fuming, with not less than 30% free Sulphur trioxide	137	1831	Sulphuric acid, with more than 51% acid	137	1830
Sulfuric acid, spent	137	1832	Sulphuric acid, with not more than 51% acid	157	2796
Sulfuric acid, with more than 51% acid	137	1830	Sulphuric acid and Hydrofluoric acid mixture	157	1786
Sulfuric acid, with not more than 51% acid	157	2796	Sulphurous acid	154	1833
Sulfuric acid and Hydrofluoric acid mixture	157	1786	Sulphur tetrafluoride	125	2418
Sulfurous acid	154	1833	Sulphur trioxide, stabilized	137	1829
			Sulphur trioxide and Chlorosulphonic acid mixture	137	1754
			Sulphuryl chloride	137	1834
			Sulphuryl fluoride	123	2191
			Tabun	153	2810
			Tars, liquid	130	1999

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Tear gas candles	159	1700	Tetrahydrophthalic anhydrides	156	2698
Tear gas devices	159	1693	1,2,3,6-Tetrahydropyridine	129	2410
Tear gas grenades	159	1700	1,2,5,6-Tetrahydropyridine	129	2410
Tear gas substance, liquid, n.o.s.	159	1693	Tetrahydrothiophene	130	2412
Tear gas substance, solid, n.o.s.	159	1693	Tetramethylammonium hydroxide	153	1835
Tear gas substance, solid, n.o.s.	159	3448	Tetramethylammonium hydroxide, solid	153	3423
Tellurium compound, n.o.s.	151	3284	Tetramethylammonium hydroxide, solution	153	1835
Tellurium hexafluoride	125	2195	Tetramethylsilane	130	2749
Terpene hydrocarbons, n.o.s.	128	2319	Tetranitromethane	143	1510
Terpinolene	128	2541	Tetrapropyl orthotitanate	128	2413
Tetrabromoethane	159	2504	Textile waste, wet	133	1857
1,1,2,2-Tetrachloroethane	151	1702	Thallium chlorate	141	2573
Tetrachloroethane	151	1702	Thallium compound, n.o.s.	151	1707
Tetrachloroethylene	160	1897	Thallium nitrate	141	2727
Tetraethyl dithiopyrophosphate	153	1704	4-Thiapentanal	152	2785
Tetraethyl dithiopyrophosphate, mixture, dry or liquid	153	1704	Thia-4-pentanal	152	2785
Tetraethylenepentamine	153	2320	Thickened GD	153	2810
Tetraethyl silicate	129	1292	Thioacetic acid	129	2436
1,1,1,2-Tetrafluoroethane	126	3159	Thiocarbamate pesticide, liquid, flammable, poisonous	131	2772
Tetrafluoroethane and Ethylene oxide mixture, with not more than 5.6% Ethylene oxide	126	3299	Thiocarbamate pesticide, liquid, flammable, toxic	131	2772
Tetrafluoroethylene, stabilized	116P	1081	Thiocarbamate pesticide, liquid, poisonous	151	3006
Tetrafluoromethane	126	1982	Thiocarbamate pesticide, liquid, poisonous, flammable	131	3005
Tetrafluoromethane, compressed	126	1982	Thiocarbamate pesticide, liquid, toxic	151	3006
1,2,3,6-Tetrahydrobenzaldehyde	129	2498	Thiocarbamate pesticide, liquid, toxic, flammable	131	3005
Tetrahydrofuran	127	2056	Thiocarbamate pesticide, solid, poisonous	151	2771
Tetrahydrofurfurylamine	129	2943			

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Thiocarbamate pesticide, solid, toxic	151	2771	2,4-Toluenediamine	151	1709	Toxic by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	142	3387	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	131	2929
Thioglycol	153	2966	Toluene diisocyanate	156	2078	Toxic by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	142	3388	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	131	2929
Thioglycolic acid	153	1940	Toluidines	153	1708	Toxic by inhalation liquid, water-reactive, flammable, n.o.s. (Inhalation Hazard Zone A)	155	3490	Toxic liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone A)	131	2929
Thiolactic acid	153	2936	Toluidines, liquid	153	1708	Toxic by inhalation liquid, water-reactive, flammable, n.o.s. (Inhalation Hazard Zone B)	155	3491	Toxic liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone B)	131	2929
<b>Thionyl chloride</b>	<b>137</b>	<b>1836</b>	Toluidines, solid	153	1708	Toxic by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)	139	3385	Toxic liquid, inorganic, n.o.s. (Inhalation Hazard Zone A)	151	3287
Thiophene	130	2414	2,4-Toluylenediamine	151	1709	Toxic by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)	139	3386	Toxic liquid, inorganic, n.o.s. (Inhalation Hazard Zone B)	151	3287
<b>Thiophosgene</b>	<b>157</b>	<b>2474</b>	2,4-Toluylenediamine, solid	151	1709	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)	154	3289	Toxic liquid, n.o.s. (Inhalation Hazard Zone A)	153	2810
Thiophosphoryl chloride	157	1837	2,4-Toluylenediamine, solution	151	3418	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone B)	154	3289	Toxic liquid, n.o.s. (Inhalation Hazard Zone B)	153	2810
Thiourea dioxide	135	3341	Toxic by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone A)	131	3492	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)	154	2927	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone A)	153	2810
Thorium metal, pyrophoric	162	2975	Toxic by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone B)	131	3493	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	154	2927	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone B)	153	2810
Thorium nitrate, solid	162	2976	Toxic by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)	154	3389	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)	154	2927	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone A)	153	2810
Tinctures, medicinal	127	1293	Toxic by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	154	3390	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	154	2927	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone B)	153	2810
Tin tetrachloride	137	1827	Toxic by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	131	3488	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)	154	2927	Toxic liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	142	3122
Tin tetrachloride, pentahydrate	154	2440	Toxic by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	131	3489	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	154	2927	Toxic liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	142	3122
Titanium disulfide	135	3174	Toxic by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	131	3488	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)	154	2927	Toxic liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)	139	3123
Titanium disulphide	135	3174	Toxic by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	131	3489	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	154	2927	Toxic liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)	139	3123
Titanium hydride	170	1871	Toxic by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	131	3488	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	131	2929	Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone A)	139	3123
Titanium powder, dry	135	2546	Toxic by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	131	3489						
Titanium powder, wetted with not less than 25% water	170	1352	Toxic by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	131	3383						
Titanium sponge granules	170	2878	Toxic by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	131	3384						
Titanium sponge powders	170	2878	Toxic by inhalation liquid, n.o.s. (Inhalation Hazard Zone A)	151	3381						
<b>Titanium tetrachloride</b>	<b>137</b>	<b>1838</b>	Toxic by inhalation liquid, n.o.s. (Inhalation Hazard Zone B)	151	3382						
Titanium trichloride, pyrophoric	135	2441									
Titanium trichloride mixture	157	2869									
Titanium trichloride mixture, pyrophoric	135	2441									
TNT, wetted with not less than 10% water	113	3366									
TNT, wetted with not less than 30% water	113	1356									
Toe puffs, nitrocellulose base	133	1353									
Toluene	130	1294									

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone A)	139	3123	Triazine pesticide, liquid, poisonous	151	2998	Trifluoromethane, refrigerated liquid	120	3136	Trinitrotoluene, wetted with not less than 10% water	113	3366
Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone B)	139	3123	Triazine pesticide, liquid, poisonous, flammable	131	2997	Trifluoromethane and Chlorotrifluoromethane azeotropic mixture with approximately 60% Chlorotrifluoromethane	126	2599	Trinitrotoluene, wetted with not less than 30% water	113	1356
Toxic solid, corrosive, inorganic, n.o.s.	154	3290	Triazine pesticide, liquid, toxic	151	2998	2-Trifluoromethylaniline	153	2942	Tripopylamine	132	2260
Toxic solid, corrosive, organic, n.o.s.	154	2928	Triazine pesticide, liquid, toxic, flammable	131	2997	3-Trifluoromethylaniline	153	2948	Tripopylene	128	2057
Toxic solid, flammable, n.o.s.	134	2930	Triazine pesticide, solid, poisonous	151	2763	Triisobutylene	128	2324	Tris-(1-aziridinyl)phosphine oxide, solution	152	2501
Toxic solid, flammable, organic, n.o.s.	134	2930	Triazine pesticide, solid, toxic	151	2763	Triisopropyl borate	129	2616	Tungsten hexafluoride	125	2196
Toxic solid, inorganic, n.o.s.	151	3288	Tri-(1-aziridinyl)phosphine oxide, solution	152	2501	Trimethoxysilane	132	9269	Turpentine	128	1299
Toxic solid, organic, n.o.s.	154	2811	Tributylamine	153	2542	Trimethylacetyl chloride	132	2438	Turpentine substitute	128	1300
Toxic solid, oxidizing, n.o.s.	141	3086	Tributylphosphane	135	3254	Trimethylamine, anhydrous	118	1083	Undecane	128	2330
Toxic solid, self-heating, n.o.s.	136	3124	Tributylphosphine	135	3254	Trimethylamine, aqueous solution	132	1297	Uranium hexafluoride	166	2978
Toxic solid, water-reactive, n.o.s.	139	3125	Trichloroacetic acid	153	1839	1,3,5-Trimethylbenzene	129	2325	Uranium hexafluoride, fissile containing more than 1% Uranium-235	166	2977
Toxic solid, which in contact with water emits flammable gases, n.o.s.	139	3125	Trichloroacetic acid, solution	153	2564	Trimethyl borate	129	2416	Uranium hexafluoride, non fissile or fissile-excepted	166	2978
Toxins	153	—	Trichloroacetyl chloride	156	2442	Trimethylchlorosilane	155	1298	Uranium metal, pyrophoric	162	2979
Toxins, extracted from living sources, liquid, n.o.s.	153	3172	Trichlorobenzenes, liquid	153	2321	Trimethylcyclohexylamine	153	2326	Uranyl nitrate, hexahydrate, solution	162	2980
Toxins, extracted from living sources, n.o.s.	153	3172	Trichlorobutene	152	2322	Trimethylhexamethylenediamines	153	2327	Uranyl nitrate, solid	162	2981
Toxins, extracted from living sources, solid, n.o.s.	153	3172	1,1,1-Trichloroethane	160	2831	Trimethylhexamethylene diisocyanate	156	2328	Urea hydrogen peroxide	140	1511
Toxins, extracted from living sources, solid, n.o.s.	153	3462	Trichloroethylene	160	1710	Trimethyl phosphite	130	2329	Urea nitrate, wetted with not less than 10% water	113	3370
Triallylamine	132	2610	Trichloroisocyanuric acid, dry	140	2468	Trinitrobenzene, wetted with not less than 10% water	113	3367	Urea nitrate, wetted with not less than 20% water	113	1357
Triallyl borate	156	2609	Trichlorosilane	139	1295	Trinitrobenzene, wetted with not less than 30% water	113	1354	Valeraldehyde	129	2058
Triazine pesticide, liquid, flammable, poisonous	131	2764	Tricresyl phosphate	151	2574	Trinitrobenzoic acid, wetted with not less than 10% water	113	3368	Valeryl chloride	132	2502
Triazine pesticide, liquid, flammable, toxic	131	2764	Triethylamine	132	1296	Trinitrobenzoic acid, wetted with not less than 30% water	113	1355	Vanadium compound, n.o.s.	151	3285
			Triethylenetetramine	153	2259	Trinitrochlorobenzene, wetted with not less than 10% water	113	3365	Vanadium oxytrichloride	137	2443
			Triethyl phosphite	130	2323	Trinitrophenol, wetted with not less than 10% water	113	3364	Vanadium pentoxide	151	2862
			Trifluoroacetic acid	154	2699	Trinitrophenol, wetted with not less than 30% water	113	1344	Vanadium tetrachloride	137	2444
			Trifluoroacetyl chloride	125	3057				Vanadium trichloride	157	2475
			Trifluorochloroethylene, stabilized	119P	1082				Vanadyl sulfate	151	2931
			1,1,1-Trifluoroethane	115	2035						
			Trifluoroethane, compressed	115	2035						
			Trifluoromethane	126	1984						

Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.	Name of Material	Guid No.	ID No.
Vanadyl sulphate	151	2931	Water-reactive solid, oxidizing, n.o.s.	138	3133	Yellow phosphorus, in solution	136	1381	Zirconium, dry, coiled wire,		
Vehicle, flammable gas powered	128	3166	Water-reactive solid, poisonous, n.o.s.	139	3134	Yellow phosphorus, molten	136	2447	finished metal sheets or		
Vehicle, flammable liquid powered	128	3166	Water-reactive solid, selfheating, n.o.s.	138	3135	Yellow phosphorus, under water	136	1381	strips	170	2858
Vehicle, fuel cell, flammable gas powered	128	3166	Water-reactive solid, toxic, n.o.s.	139	3134	Zinc ammonium nitrite	140	1512	Zirconium, dry, finished		
Vehicle, fuel cell, flammable liquid powered	128	3166	Wheelchair, electric, with batteries	154	3171	Zinc arsenate	151	1712	sheets, strips or coiled wire	135	2009
Vinyl acetate, stabilized	129P	1301	White asbestos	171	2590	Zinc arsenate and Zinc arsenite mixture	151	1712	Zirconium hydride	138	1437
Vinyl bromide, stabilized	116P	1085	White phosphorus, dry	136	1381	Zinc arsenite	151	1712	Zirconium metal, liquid		
Vinyl butyrate, stabilized	129P	2838	White phosphorus, in solution	136	1381	Zinc arsenite and Zinc arsenate mixture	151	1712	suspension	170	1308
Vinyl chloride, stabilized	116P	1086	White phosphorus, molten	136	2447	Zinc ashes	138	1435	Zirconium metal, powder, wet	170	1358
Vinyl chloroacetate	155	2589	White phosphorus, under water	136	1381	Zinc bromate	140	2469	Zirconium nitrate	140	2728
Vinyl ethyl ether, stabilized	127P	1302	Wood preservatives, liquid	129	1306	Zinc chlorate	140	1513	Zirconium picramate, wetted		
Vinyl fluoride, stabilized	116P	1860	Wool waste, wet	133	1387	Zinc chloride, anhydrous	154	2331	with not less than 20% water	113	1517
Vinylidene chloride, stabilized	130P	1303	Xanthates	135	3342	Zinc chloride, solution	154	1840	Zirconium powder, dry	135	2008
Vinyl isobutyl ether, stabilized	127P	1304	Xenon	121	2036	Zinc cyanide	151	1713	Zirconium powder, wetted with		
Vinyl methyl ether, stabilized	116P	1087	Xenon, compressed	121	2036	Zinc dithionite	171	1931	not less than 25% water	170	1358
Vinylpyridines, stabilized	131P	3073	Xenon, refrigerated liquid (cryogenic liquid)	120	2591	Zinc dross	138	1435	Zirconium scrap	135	1932
Vinyltoluenes, stabilized	130P	2618	Xylenes	130	1307	Zinc dust	138	1436	Zirconium suspended in a		
Vinyltrichlorosilane	155P	1305	Xylenols	153	2261	Zinc fluorosilicate	151	2855	flammable liquid	170	1308
Vinyltrichlorosilane, stabilized	155P	1305	Xylenols, liquid	153	3430	Zinc hydrosulfite	171	1931	Zirconium suspended in a		
VX	153	2810	Xylenols, solid	153	2261	Zinc hydrosulphite	171	1931	liquid (flammable)	170	1308
Water-reactive liquid, corrosive, n.o.s.	138	3129	Xylidines	153	1711	Zinc nitrate	140	1514	Zirconium tetrachloride	137	2503
Water-reactive liquid, n.o.s.	138	3148	Xylidines, liquid	153	1711	Zinc permanganate	140	1515			
Water-reactive liquid, poisonous, n.o.s.	139	3130	Xylidines, solid	153	1711	Zinc peroxide	143	1516			
Water-reactive liquid, toxic, n.o.s.	139	3130	Xylidines, solid	153	3452	Zinc phosphide	139	1714			
Water-reactive solid, corrosive, n.o.s.	138	3131	Xylyl bromide	152	1701	Zinc powder	138	1436			
Water-reactive solid, flammable, n.o.s.	138	3132	Xylyl bromide, liquid	152	1701	Zinc residue	138	1435			
Water-reactive solid, n.o.s.	138	2813	Xylyl bromide, solid	152	3417	Zinc resinate	133	2714			
			Yellow phosphorus, dry	136	1381	Zinc silicofluoride	151	2855			
						Zinc skimmings	138	1435			

## GUIDE INDEX

Guide No.	Type of Substance	Page No.
111	Mixed Load/Unidentified Cargo	162
112	Explosives - Division 1.1, 1.2, 1.3 or 1.5	164
113	Flammable Solids – Toxic (Wet/Desensitized Explosive)	166
114	Explosives - Division 1.4 or 1.6	168
115	Gases – Flammable (Including Refrigerated Liquids)	170
116	Gases - Flammable (Unstable)	172
117	Gases - Toxic – Flammable (Extreme Hazard)	174
118	Gases - Flammable - Corrosive	176
119	Gases - Toxic - Flammable	178
120	Gases – Inert (Including Refrigerated Liquids)	180
121	Gases - Inert	182
122	Gases – Oxidizing (Including Refrigerated Liquids)	184
123	Gases - Toxic and/or Corrosive	186
124	Gases - Toxic and/or Corrosive - Oxidizing	188
125	Gases - Corrosive	190
126	Gases - Compressed or Liquefied (Including Refrigerated Gases)	192
127	Flammable Liquids (Polar/Water-Miscible)	194
128	Flammable Liquids (Non-Polar/Water-Immiscible)	196
129	Flammable Liquids (Polar/Water-Miscible/Noxious)	198
130	Flammable Liquids (Non-Polar/Water-Immiscible/Noxious)	200
131	Flammable Liquids - Toxic	202
132	Flammable Liquids - Corrosive	204
133	Flammable Solids	206
134	Flammable Solids - Toxic and/or Corrosive	208
135	Substances - Spontaneously Combustible	210
136	Substances - Spontaneously Combustible – Toxic and/or Corrosive (Air-Reactive)	212
137	Substances - Water-Reactive - Corrosive	214
138	Substances - Water-Reactive (Emitting Flammable Gases)	216
139	Substances - Water-Reactive (Emitting Flammable And Toxic Gases)	218
140	Oxidizers	220
141	Oxidizers - Toxic	222
142	Oxidizers - Toxic (Liquid)	224
143	Oxidizers (Unstable)	226

144	Oxidizers (Water-Reactive)	228
145	Organic Peroxides (Heat and Contamination Sensitive)	230
146	Organic Peroxides (Heat, Contamination and Friction Sensitive)	232
147	Lithium Ion Batteries	234
148	Organic Peroxides (Heat and Contamination Sensitive/Temperature Controlled)	236
149	Substances (Self-Reactive)	238
150	Substances (Self-Reactive/ Temperature Controlled)	240
151	Substances - Toxic (Non-Combustible)	242
152	Substances - Toxic (Combustible)	244
153	Substances - Toxic and/or Corrosive (Combustible)	246
154	Substances - Toxic and/or Corrosive (Non-Combustible)	248
155	Substances - Toxic and/or Corrosive (Flammable/Water-Sensitive)	250
156	Substances - Toxic and/or Corrosive (Combustible/Water-Sensitive)	252
157	Substances - Toxic and/or Corrosive (Non-Combustible/Water-Sensitive)	254
158	Infectious Substances	256
159	Substances (Irritating)	258
160	Halogenated Solvents	260
161	Radioactive Materials (Low Level Radiation)	262
162	Radioactive Materials (Low to Moderate Level Radiation)	264
163	Radioactive Materials (Low to High Level Radiation)	266
164	Radioactive Materials (Special Form/Low to High Level External Radiation)	268
165	Radioactive Materials (Fissile/Low to High Level Radiation)	270
166	Radioactive Materials – Corrosive (Uranium Hexafluoride/Water-Sensitive)	272
167	Fluorine (Refrigerated Liquid)	274
168	Carbon Monoxide (Refrigerated Liquid)	276
169	Aluminum (Molten)	278
170	Metals (Powders, Dusts, Shavings, Borings, Turnings, or Cuttings, etc.)	280
171	Substances (Low to Moderate Hazard)	282
172	Gallium and Mercury	284



## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- May explode from heat, shock, friction or contamination.
- May react violently or explosively on contact with air, water or foam.
- May be ignited by heat, sparks or flames.
- Vapours may travel to source of ignition and flash back.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## HEALTH

- Inhalation, ingestion or contact with substance may cause severe injury, infection, disease or death.
- High concentration of gas may cause asphyxiation without warning.
- Contact may cause burns to skin and eyes.
- Fire or contact with water may produce irritating, toxic and/or corrosive gases.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it may not be effective in spill situations.

## EVACUATION

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

CAUTION: Material may react with extinguishing agent.

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

## Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks

- Cool containers with flooding quantities of water until well after fire is out.
- Do not get water inside containers.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- Do not touch or walk through spilled material.
- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Prevent entry into waterways, sewers, basements or confined areas.

## Small Spill

- Take up with sand or other non-combustible absorbent material and place into containers for later disposal.

## Large Spill

- Dike far ahead of liquid spill for later disposal.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Shower and wash with soap and water.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- MAY EXPLODE AND THROW FRAGMENTS 1600 meters (1 MILE) OR MORE IF FIRE REACHES CARGO.
- For information on "Compatibility Group" letters, refer to Glossary section.

## HEALTH

- Fire may produce irritating, corrosive and/or toxic gases.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- Isolate spill or leak area immediately for at least 500 meters (1/3 mile) in all directions.
- Move people out of line of sight of the scene and away from windows.
- Keep unauthorized personnel away.
- Stay upwind.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial EVACUATION for 800 meters (1/2 mile) in all directions.

## Fire

- If rail car or trailer is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, initiate evacuation including emergency responders for 1600 meters (1 mile) in all directions.

\* FOR INFORMATION ON "COMPATIBILITY GROUP" LETTERS,  
REFER TO THE GLOSSARY SECTION.

## EMERGENCY RESPONSE

## FIRE

## CARGO Fire

- DO NOT fight fire when fire reaches cargo! Cargo may EXPLODE!
- Stop all traffic and clear the area for at least 1600 meters (1 mile) in all directions and let burn.
- Do not move cargo or vehicle if cargo has been exposed to heat.

## TIRE or VEHICLE Fire

- Use plenty of water - FLOOD it! If water is not available, use CO<sub>2</sub>, dry chemical or dirt.
- If possible, and WITHOUT RISK, use unmanned hose holders or monitor nozzles from maximum distance to prevent fire from spreading to cargo area.
- Pay special attention to tire fires as re-ignition may occur. Stand by with extinguisher ready.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.
- DO NOT OPERATE RADIO TRANSMITTERS WITHIN 100 meters (330 feet) OF ELECTRIC DETONATORS.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

\* FOR INFORMATION ON "COMPATIBILITY GROUP" LETTERS,  
REFER TO THE GLOSSARY SECTION.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- Flammable/combustible material.
- May be ignited by heat, sparks or flames.
- DRIED OUT material may explode if exposed to heat, flame, friction or shock; Treat as an explosive (GUIDE 112).
- Keep material wet with water or treat as an explosive (GUIDE 112).
- Runoff to sewer may create fire or explosion hazard.

### HEALTH

- Some are toxic and may be fatal if inhaled, swallowed or absorbed through skin.
- Contact may cause burns to skin and eyes.
- Fire may produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- Isolate spill or leak area immediately for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

### EVACUATION

#### Large Spill

- Consider initial EVACUATION for 500 meters (1/3 mile) in all directions.

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

#### CARGO Fire

- DO NOT fight fire when fire reaches cargo! Cargo may EXPLODE!
- Stop all traffic and clear the area for at least 800 meters (1/2 mile) in all directions and let burn.
- Do not move cargo or vehicle if cargo has been exposed to heat.

#### TIRE or VEHICLE Fire

- Use plenty of water - FLOOD it! If water is not available, use CO<sub>2</sub>, dry chemical or dirt.
- If possible, and WITHOUT RISK, use unmanned hose holders or monitor nozzles from maximum distance to prevent fire from spreading to cargo area.
- Pay special attention to tire fires as re-ignition may occur. Stand by with extinguisher ready.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.

#### Small Spill

- Flush area with flooding quantities of water.

#### Large Spill

- Wet down with water and dike for later disposal.
- KEEP "WETTED" PRODUCT WET BY SLOWLY ADDING FLOODING QUANTITIES OF WATER.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- MAY EXPLODE AND THROW FRAGMENTS 500 meters (1/3 MILE) OR MORE IF FIRE REACHES CARGO.
- For information on "Compatibility Group" letters, refer to Glossary section.

## HEALTH

- Fire may produce irritating, corrosive and/or toxic gases.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- Isolate spill or leak area immediately for at least 100 meters (330 feet) in all directions.
- Move people out of line of sight of the scene and away from windows.
- Keep unauthorized personnel away.
- Stay upwind.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial EVACUATION for 250 meters (800 feet) in all directions.

## Fire

- If rail car or trailer is involved in a fire, ISOLATE for 500 meters (1/3 mile) in all directions; also initiate evacuation including emergency responders for 500 meters (1/3 mile) in all directions.

\* FOR INFORMATION ON "COMPATIBILITY GROUP" LETTERS,  
REFER TO THE GLOSSARY SECTION.

## EMERGENCY RESPONSE

## FIRE

## CARGO Fire

- DO NOT fight fire when fire reaches cargo! Cargo may EXPLODE!
- Stop all traffic and clear the area for at least 500 meters (1/3 mile) in all directions and let burn.
- Do not move cargo or vehicle if cargo has been exposed to heat.

## TIRE or VEHICLE Fire

- Use plenty of water - FLOOD it! If water is not available, use CO<sub>2</sub>, dry chemical or dirt.
- If possible, and WITHOUT RISK, use unmanned hose holders or monitor nozzles from maximum distance to prevent fire from spreading to cargo area.
- Pay special attention to tire fires as re-ignition may occur. Stand by with extinguisher ready.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.
- DO NOT OPERATE RADIO TRANSMITTERS WITHIN 100 meters (330 feet) OF ELECTRIC DETONATORS.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## SUPPLEMENTAL INFORMATION

- Packages bearing the 1.4S label or packages containing material classified as 1.4S are designed or packaged in such a manner that when involved in a fire, may burn vigorously with localized detonations and projection of fragments.
- Effects are usually confined to immediate vicinity of packages.
- If fire threatens cargo area containing packages bearing the 1.4S label or packages containing material classified as 1.4S, consider isolating at least 15 meters (50 feet) in all directions. Fight fire with normal precautions from a reasonable distance.

\* FOR INFORMATION ON "COMPATIBILITY GROUP" LETTERS,  
REFER TO THE GLOSSARY SECTION.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- EXTREMELY FLAMMABLE.
  - Will be easily ignited by heat, sparks or flames.
  - Will form explosive mixtures with air.
  - Vapours from liquefied gas are initially heavier than air and spread along ground.
- CAUTION: Hydrogen (UN1049), Deuterium (UN1957), Hydrogen, refrigerated liquid (UN1966) and Methane (UN1971) are lighter than air and will rise. Hydrogen and Deuterium fires are difficult to detect since they burn with an invisible flame. Use an alternate method of detection (thermal camera, broom handle, etc.)
- Vapours may travel to source of ignition and flash back.
  - Cylinders exposed to fire may vent and release flammable gas through pressure relief devices.
  - Containers may explode when heated.
  - Ruptured cylinders may rocket.

### HEALTH

- Vapours may cause dizziness or asphyxiation without warning.
- Some may be irritating if inhaled at high concentrations.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire may produce irritating and/or toxic gases.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.
- Always wear thermal protective clothing when handling refrigerated/cryogenic liquids.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 800 meters (1/2 mile).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- DO NOT EXTINGUISH A LEAKING GAS FIRE UNLESS LEAK CAN BE STOPPED.
- CAUTION: Hydrogen (UN1049), Deuterium (UN1957) and Hydrogen, refrigerated liquid (UN1966) burn with an invisible flame. Hydrogen and Methane mixture, compressed (UN2034) may burn with an invisible flame.

#### Small Fire

- Dry chemical or CO<sub>2</sub>.

#### Large Fire

- Water spray or fog.
- Move containers from fire area if you can do it without risk.

#### Fire Involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Do not direct water at spill or source of leak.
- Prevent spreading of Vapours through sewers, ventilation systems and confined areas.
- Isolate area until gas has dispersed.

CAUTION: When in contact with refrigerated/cryogenic liquids, many materials become brittle and are likely to break without warning.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Clothing frozen to the skin should be thawed before being removed.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- EXTREMELY FLAMMABLE.
- Will be easily ignited by heat, sparks or flames.
- Will form explosive mixtures with air.
- Silane will ignite spontaneously in air.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Vapours may travel to source of ignition and flash back.
- Cylinders exposed to fire may vent and release flammable gas through pressure relief devices.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## HEALTH

- Vapours may cause dizziness or asphyxiation without warning.
- Some may be toxic if inhaled at high concentrations.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire may produce irritating and/or toxic gases.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 800 meters (1/2 mile).

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- DO NOT EXTINGUISH A LEAKING GAS FIRE UNLESS LEAK CAN BE STOPPED.

## Small Fire

- Dry chemical or CO<sub>2</sub>.

## Large Fire

- Water spray or fog.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Stop leak if you can do it without risk.
- Do not touch or walk through spilled material.
- Do not direct water at spill or source of leak.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Isolate area until gas has dispersed.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### HEALTH

- TOXIC; Extremely Hazardous.
- May be fatal if inhaled or absorbed through skin.
- Initial odor may be irritating or foul and may deaden your sense of smell.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control may cause pollution.

### FIRE OR EXPLOSION

- These materials are extremely flammable.
- May form explosive mixtures with air.
- May be ignited by heat, sparks or flames.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Vapours may travel to source of ignition and flash back.
- Runoff may create fire or explosion hazard.
- Cylinders exposed to fire may vent and release toxic and flammable gas through pressure relief devices.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances.

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

DO NOT EXTINGUISH A LEAKING GAS FIRE UNLESS LEAK CAN BE STOPPED.

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

#### Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

#### Fire Involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Do not direct water at spill or source of leak.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Isolate area until gas has dispersed.
- Consider igniting spill or leak to eliminate toxic gas concerns.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- EXTREMELY FLAMMABLE.
- May be ignited by heat, sparks or flames.
- May form explosive mixtures with air.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Vapours may travel to source of ignition and flash back.
- Some of these materials may react violently with water.
- Cylinders exposed to fire may vent and release flammable gas through pressure relief devices.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

### HEALTH

- May cause toxic effects if inhaled.
- Vapours are extremely irritating.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 800 meters (1/2 mile).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- DO NOT EXTINGUISH A LEAKING GAS FIRE UNLESS LEAK CAN BE STOPPED.

#### Small Fire

- Dry chemical or CO<sub>2</sub>.

#### Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

#### Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Do not direct water at spill or source of leak.
- Isolate area until gas has dispersed.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- TOXIC; may be fatal if inhaled or absorbed through skin.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control may cause pollution.

## FIRE OR EXPLOSION

- Flammable; may be ignited by heat, sparks or flames.
- May form explosive mixtures with air.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Vapours may travel to source of ignition and flash back.
- Some of these materials may react violently with water.
- Cylinders exposed to fire may vent and release toxic and flammable gas through pressure relief devices.
- Containers may explode when heated.
- Ruptured cylinders may rocket.
- Runoff may create fire or explosion hazard.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- DO NOT EXTINGUISH A LEAKING GAS FIRE UNLESS LEAK CAN BE STOPPED.

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or alcohol-resistant foam.

## Large Fire

- Water spray, fog or alcohol-resistant foam.
- FOR CHLOROSILANES, DO NOT USE WATER; use AFFF alcohol-resistant medium expansion foam.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

## Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Do not direct water at spill or source of leak.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- FOR CHLOROSILANES, use AFFF alcohol-resistant medium expansion foam to reduce Vapours.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Isolate area until gas has dispersed.

## FIRST AID

- Move victim to fresh air. • Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### HEALTH

- Vapours may cause dizziness or asphyxiation without warning.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.

### FIRE OR EXPLOSION

- Non-flammable gases.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.
- Always wear thermal protective clothing when handling refrigerated/cryogenic liquids or solids.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Use extinguishing agent suitable for type of surrounding fire.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

### Fire Involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Do not direct water at spill or source of leak.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Allow substance to eVapourate.
- Ventilate the area.

CAUTION: When in contact with refrigerated/cryogenic liquids, many materials become brittle and are likely to break without warning.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Clothing frozen to the skin should be thawed before being removed.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

## HEALTH

- Vapours may cause dizziness or asphyxiation without warning.
- Vapours from liquefied gas are initially heavier than air and spread along ground.

## FIRE OR EXPLOSION

- Non-flammable gases.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- Use extinguishing agent suitable for type of surrounding fire.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

## Fire Involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Do not direct water at spill or source of leak.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Allow substance to eVapourate.
- Ventilate the area.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- Substance does not burn but will support combustion.
- Some may react explosively with fuels.
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Runoff may create fire or explosion hazard.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

### HEALTH

- Vapours may cause dizziness or asphyxiation without warning.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire may produce irritating and/or toxic gases.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.
- Always wear thermal protective clothing when handling refrigerated/cryogenic liquids.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 500 meters (1/3 mile).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Use extinguishing agent suitable for type of surrounding fire.

#### Small Fire

- Dry chemical or CO<sub>2</sub>.

#### Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

#### Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

### SPILL OR LEAK

- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Do not direct water at spill or source of leak.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Prevent entry into waterways, sewers, basements or confined areas.
- Allow substance to eVapourate.
- Isolate area until gas has dispersed.

CAUTION: When in contact with refrigerated/cryogenic liquids, many materials become brittle and are likely to break without warning.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Clothing frozen to the skin should be thawed before being removed.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- TOXIC; may be fatal if inhaled or absorbed through skin.
- Vapours may be irritating.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control may cause pollution.

## FIRE OR EXPLOSION

- Some may burn but none ignite readily.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Cylinders exposed to fire may vent and release toxic and/or corrosive gas through pressure relief devices.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical or CO<sub>2</sub>.

## Large Fire

- Water spray, fog or regular foam.
- Do not get water inside containers.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

## Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Do not direct water at spill or source of leak.
- Isolate area until gas has dispersed.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- TOXIC; may be fatal if inhaled or absorbed through skin.
- Fire will produce irritating, corrosive and/or toxic gases.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Runoff from fire control may cause pollution.

## FIRE OR EXPLOSION

- Substance does not burn but will support combustion.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- These are strong oxidizers and will react vigorously or explosively with many materials including fuels.
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- Some will react violently with air, moist air and/or water.
- Cylinders exposed to fire may vent and release toxic and/or corrosive gas through pressure relief devices.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances.

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

CAUTION: These materials do not burn but will support combustion. Some will react violently with water.

- Contain fire and let burn. If fire must be fought, water spray or fog is recommended.
- Water only; no dry chemical, CO<sub>2</sub> or Halon®.
- Do not get water inside containers.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

## Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch or walk through spilled material.
- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Do not direct water at spill or source of leak.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Isolate area until gas has dispersed.
- Ventilate the area.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Clothing frozen to the skin should be thawed before being removed.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- TOXIC; may be fatal if inhaled, ingested or absorbed through skin.
- Vapours are extremely irritating and corrosive.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control may cause pollution.

## FIRE OR EXPLOSION

- Some may burn but none ignite readily.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Some of these materials may react violently with water.
- Cylinders exposed to fire may vent and release toxic and/or corrosive gas through pressure relief devices.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical or CO<sub>2</sub>.

## Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.
- Do not get water inside containers.
- Damaged cylinders should be handled only by specialists.

## Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Do not direct water at spill or source of leak.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Isolate area until gas has dispersed.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- In case of contact with Hydrogen fluoride, anhydrous (UN1052), flush skin and eyes with water for 5 minutes; then, for skin exposures rub on a calcium/gel combination; for eyes flush with a water/calcium solution for 15 minutes.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- Some may burn but none ignite readily.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

### HEALTH

- Vapours may cause dizziness or asphyxiation without warning.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Fire may produce irritating, corrosive and/or toxic gases.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 500 meters (1/3 mile).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Use extinguishing agent suitable for type of surrounding fire.

#### Small Fire

- Dry chemical or CO<sub>2</sub>.

#### Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.
- Damaged cylinders should be handled only by specialists.

#### Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- Some of these materials, if spilled, may eVapourate leaving a flammable residue.

### SPILL OR LEAK

- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Do not direct water at spill or source of leak.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Allow substance to eVapourate.
- Ventilate the area.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- HIGHLY FLAMMABLE: Will be easily ignited by heat, sparks or flames.
- Vapours may form explosive mixtures with air.
- Vapours may travel to source of ignition and flash back.
- Most Vapours are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Vapour explosion hazard indoors, outdoors or in sewers.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Runoff to sewer may create fire or explosion hazard.
- Containers may explode when heated.
- Many liquids are lighter than water.

## HEALTH

- Inhalation or contact with material may irritate or burn skin and eyes.
- Fire may produce irritating, corrosive and/or toxic gases.
- Vapours may cause dizziness or suffocation.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 300 meters (1000 feet).

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

CAUTION: All these products have a very low flash point: Use of water spray when fighting fire may be inefficient.

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or alcohol-resistant foam.

## Large Fire

- Water spray, fog or alcohol-resistant foam.
- Do not use straight streams.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
  - All equipment used when handling the product must be grounded.
  - Do not touch or walk through spilled material.
  - Stop leak if you can do it without risk.
  - Prevent entry into waterways, sewers, basements or confined areas.
  - A Vapour suppressing foam may be used to reduce Vapours.
  - Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.
  - Use clean non-sparking tools to collect absorbed material.
- Large Spill
- Dike far ahead of liquid spill for later disposal.
  - Water spray may reduce Vapour; but may not prevent ignition in closed spaces.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Wash skin with soap and water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- HIGHLY FLAMMABLE: Will be easily ignited by heat, sparks or flames.
- Vapours may form explosive mixtures with air.
- Vapours may travel to source of ignition and flash back.
- Most Vapours are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Vapour explosion hazard indoors, outdoors or in sewers.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Runoff to sewer may create fire or explosion hazard.
- Containers may explode when heated.
- Many liquids are lighter than water.
- Substance may be transported hot.
- For UN3166, if Lithium ion batteries are involved, also consult GUIDE 147.
- If molten aluminum is involved, refer to GUIDE 169.

### HEALTH

- Inhalation or contact with material may irritate or burn skin and eyes.
- Fire may produce irritating, corrosive and/or toxic gases.
- Vapours may cause dizziness or suffocation.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 300 meters (1000 feet).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

CAUTION: All these products have a very low flash point: Use of water spray when fighting fire may be inefficient.

CAUTION: For mixtures containing alcohol or polar solvent, alcohol-resistant foam may be more effective.

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

#### Large Fire

- Water spray, fog or regular foam.
- Do not use straight streams.
- Move containers from fire area if you can do it without risk.

#### Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- A Vapour suppressing foam may be used to reduce Vapours.
- Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.
- Use clean non-sparking tools to collect absorbed material.

#### Large Spill

- Dike far ahead of liquid spill for later disposal.
- Water spray may reduce Vapour; but may not prevent ignition in closed spaces.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Wash skin with soap and water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- HIGHLY FLAMMABLE: Will be easily ignited by heat, sparks or flames.
- Vapours may form explosive mixtures with air.
- Vapours may travel to source of ignition and flash back.
- Most Vapours are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Vapour explosion hazard indoors, outdoors or in sewers.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Runoff to sewer may create fire or explosion hazard.
- Containers may explode when heated.
- Many liquids are lighter than water.

### HEALTH

- May cause toxic effects if inhaled or absorbed through skin.
- Inhalation or contact with material may irritate or burn skin and eyes.
- Fire will produce irritating, corrosive and/or toxic gases.
- Vapours may cause dizziness or suffocation.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 300 meters (1000 feet).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

CAUTION: All these products have a very low flash point: Use of water spray when fighting fire may be inefficient.

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or alcohol-resistant foam.
- Do not use dry chemical extinguishers to control fires involving nitromethane or nitroethane.

#### Large Fire

- Water spray, fog or alcohol-resistant foam.
- Do not use straight streams.
- Move containers from fire area if you can do it without risk.

#### Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- A Vapour suppressing foam may be used to reduce Vapours.
- Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.
- Use clean non-sparking tools to collect absorbed material.

#### Large Spill

- Dike far ahead of liquid spill for later disposal.
- Water spray may reduce Vapour; but may not prevent ignition in closed spaces.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Wash skin with soap and water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- HIGHLY FLAMMABLE: Will be easily ignited by heat, sparks or flames.
- Vapours may form explosive mixtures with air.
- Vapours may travel to source of ignition and flash back.
- Most Vapours are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Vapour explosion hazard indoors, outdoors or in sewers.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Runoff to sewer may create fire or explosion hazard.
- Containers may explode when heated.
- Many liquids are lighter than water.

### HEALTH

- May cause toxic effects if inhaled or absorbed through skin.
- Inhalation or contact with material may irritate or burn skin and eyes.
- Fire will produce irritating, corrosive and/or toxic gases.
- Vapours may cause dizziness or suffocation.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 300 meters (1000 feet).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

CAUTION: All these products have a very low flash point: Use of water spray when fighting fire may be inefficient.

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

#### Large Fire

- Water spray, fog or alcohol-resistant foam.
- Do not use straight streams.
- Move containers from fire area if you can do it without risk.

#### Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- A Vapour suppressing foam may be used to reduce Vapours.
- Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.
- Use clean non-sparking tools to collect absorbed material.

#### Large Spill

- Dike far ahead of liquid spill for later disposal.
- Water spray may reduce Vapour; but may not prevent ignition in closed spaces.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Wash skin with soap and water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

## HEALTH

- TOXIC; may be fatal if inhaled, ingested or absorbed through skin.
- Inhalation or contact with some of these materials will irritate or burn skin and eyes.
- Fire will produce irritating, corrosive and/or toxic gases.
- Vapours may cause dizziness or suffocation.
- Runoff from fire control or dilution water may cause pollution.

## FIRE OR EXPLOSION

- HIGHLY FLAMMABLE: Will be easily ignited by heat, sparks or flames.
- Vapours may form explosive mixtures with air.
- Vapours may travel to source of ignition and flash back.
- Most Vapours are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Vapour explosion and poison hazard indoors, outdoors or in sewers.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Runoff to sewer may create fire or explosion hazard.
- Containers may explode when heated.
- Many liquids are lighter than water.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

CAUTION: All these products have a very low flash point: Use of water spray when fighting fire may be inefficient.

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or alcohol-resistant foam.

## Large Fire

- Water spray, fog or alcohol-resistant foam.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal; do not scatter the material.
- Use water spray or fog; do not use straight streams.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- A Vapour suppressing foam may be used to reduce Vapours.
- Small Spill • Absorb with earth, sand or other non-combustible material and transfer to containers for later disposal.
- Use clean non-sparking tools to collect absorbed material.
- Large Spill • Dike far ahead of liquid spill for later disposal.
- Water spray may reduce Vapour; but may not prevent ignition in closed spaces.

## FIRST AID

- Move victim to fresh air. • Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Wash skin with soap and water.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin. • Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- Flammable/combustible material.
- May be ignited by heat, sparks or flames.
- Vapours may form explosive mixtures with air.
- Vapours may travel to source of ignition and flash back.
- Most Vapours are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Vapour explosion hazard indoors, outdoors or in sewers.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Runoff to sewer may create fire or explosion hazard.
- Containers may explode when heated.
- Many liquids are lighter than water.

## HEALTH

- May cause toxic effects if inhaled or ingested/swallowed.
- Contact with substance may cause severe burns to skin and eyes.
- Fire will produce irritating, corrosive and/or toxic gases.
- Vapours may cause dizziness or suffocation.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- Some of these materials may react violently with water.

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or alcohol-resistant foam.

## Large Fire

- Water spray, fog or alcohol-resistant foam.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal; do not scatter the material.
- Do not get water inside containers.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- A Vapour suppressing foam may be used to reduce Vapours.
- Absorb with earth, sand or other non-combustible material and transfer to containers (except for Hydrazine).
- Use clean non-sparking tools to collect absorbed material.

## Large Spill

- Dike far ahead of liquid spill for later disposal.
- Water spray may reduce Vapour; but may not prevent ignition in closed spaces.

## FIRST AID

- Move victim to fresh air. • Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- In case of burns, immediately cool affected skin for as long as possible with cold water. Do not remove clothing if adhering to skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- Flammable/combustible material.
- May be ignited by friction, heat, sparks or flames.
- Some may burn rapidly with flare burning effect.
- Powders, dusts, shavings, borings, turnings or cuttings may explode or burn with explosive violence.
- Substance may be transported in a molten form at a temperature that may be above its flash point.
- May re-ignite after fire is extinguished.

## HEALTH

- Fire may produce irritating and/or toxic gases.
- Contact may cause burns to skin and eyes.
- Contact with molten substance may cause severe burns to skin and eyes.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, CO<sub>2</sub>, sand, earth, water spray or regular foam.

## Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.

## Fire Involving Metal Pigments or Pastes (e.g. "Aluminum Paste")

- Aluminum Paste fires should be treated as a combustible metal fire. Use DRY sand, graphite powder, dry sodium chloride based extinguishers, G-1® or Met-L-X® powder. Also, see GUIDE 170.

## Fire Involving Tanks or Car/Trailer Loads

- Cool containers with flooding quantities of water until well after fire is out.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.

## Small Dry Spill

- With clean shovel place material into clean, dry container and cover loosely; move containers from spill area.

## Large Spill

- Wet down with water and dike for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Removal of solidified molten material from skin requires medical assistance.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- Flammable/combustible material.
- May be ignited by heat, sparks or flames.
- When heated, Vapours may form explosive mixtures with air: indoors, outdoors and sewers explosion hazards.
- Contact with metals may evolve flammable hydrogen gas.
- Containers may explode when heated.

## HEALTH

- TOXIC; inhalation, ingestion or skin contact with material may cause severe injury or death.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may be corrosive and/or toxic and cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.
- Stay upwind.
- Keep unauthorized personnel away.
- Keep out of low areas.
- Ventilate enclosed areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or alcohol-resistant foam.

## Large Fire

- Water spray, fog or alcohol-resistant foam.
- Move containers from fire area if you can do it without risk.
- Use water spray or fog; do not use straight streams.
- Do not get water inside containers.
- Dike fire-control water for later disposal; do not scatter the material.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Stop leak if you can do it without risk.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Prevent entry into waterways, sewers, basements or confined areas.
- Use clean non-sparking tools to collect material and place it into loosely covered plastic containers for later disposal.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- Flammable/combustible material.
- May ignite on contact with moist air or moisture.
- May burn rapidly with flare-burning effect.
- Some react vigorously or explosively on contact with water.
- Some may decompose explosively when heated or involved in a fire.
- May re-ignite after fire is extinguished.
- Runoff may create fire or explosion hazard.
- Containers may explode when heated.

## HEALTH

- Fire will produce irritating, corrosive and/or toxic gases.
- Inhalation of decomposition products may cause severe injury or death.
- Contact with substance may cause severe burns to skin and eyes.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Stay upwind.
- Keep unauthorized personnel away.
- Keep out of low areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- DO NOT USE WATER, CO<sub>2</sub> OR FOAM ON MATERIAL ITSELF.
- Some of these materials may react violently with water.

EXCEPTION: For Xanthates, UN3342 and for Dithionite (Hydrosulfite/Hydrosulphite) UN1384, UN1923 and UN1929, USE FLOODING AMOUNTS OF WATER for SMALL AND LARGE fires to stop the reaction. Smothering will not work for these materials, they do not need air to burn.

## Small Fire

- Dry chemical, soda ash, lime or DRY sand, EXCEPT for UN1384, UN1923, UN1929 and UN3342.

## Large Fire

- DRY sand, dry chemical, soda ash or lime EXCEPT for UN1384, UN1923, UN1929 and UN3342, or withdraw from area and let fire burn.
- CAUTION: UN3342 when flooded with water will continue to evolve flammable Carbon disulfide/Carbon disulphide Vapours.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers or in contact with substance.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.

## Small Spill

EXCEPTION: For spills of Xanthates, UN3342 and for Dithionite (Hydrosulfite/Hydrosulphite), UN1384, UN1923 and UN1929, dissolve in 5 parts water and collect for proper disposal.

- CAUTION: UN3342 when flooded with water will continue to evolve flammable Carbon disulfide/Carbon disulphide Vapours.
- Cover with DRY earth, DRY sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.
- Use clean non-sparking tools to collect material and place it into loosely covered plastic containers for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- Extremely flammable; will ignite itself if exposed to air.
- Burns rapidly, releasing dense, white, irritating fumes.
- Substance may be transported in a molten form.
- May re-ignite after fire is extinguished.
- Corrosive substances in contact with metals may produce flammable hydrogen gas.
- Containers may explode when heated.

### HEALTH

- Fire will produce irritating, corrosive and/or toxic gases.
- TOXIC; ingestion of substance or inhalation of decomposition products will cause severe injury or death.
- Contact with substance may cause severe burns to skin and eyes.
- Some effects may be experienced due to skin absorption.
- Runoff from fire control may be corrosive and/or toxic and cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Stay upwind.
- Keep unauthorized personnel away.
- Keep out of low areas.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.
- For Phosphorus (UN1381): Special aluminized protective clothing should be worn when direct contact with the substance is possible.

### EVACUATION

#### Spill

- Consider initial downwind evacuation for at least 300 meters (1000 feet).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

#### Small Fire

- Water spray, wet sand or wet earth.

#### Large Fire

- Water spray or fog.

Do not scatter spilled material with high pressure water streams.

- Move containers from fire area if you can do it without risk.

#### Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.

#### Small Spill

- Cover with water, sand or earth. Shovel into metal container and keep material under water.

#### Large Spill

- Dike for later disposal and cover with wet sand or earth.
- Prevent entry into waterways, sewers, basements or confined areas.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- In case of contact with substance, keep exposed skin areas immersed in water or covered with wet bandages until medical attention is received.
- Removal of solidified molten material from skin requires medical assistance.
- Remove and isolate contaminated clothing and shoes at the site and place in metal container filled with water. Fire hazard if allowed to dry.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- CORROSIVE and/or TOXIC; inhalation, ingestion or contact (skin, eyes) with Vapours, dusts or substance may cause severe injury, burns or death.
- Fire will produce irritating, corrosive and/or toxic gases.
- Reaction with water may generate much heat that will increase the concentration of fumes in the air.
- Contact with molten substance may cause severe burns to skin and eyes.
- Runoff from fire control or dilution water may cause pollution.

## FIRE OR EXPLOSION

- EXCEPT FOR ACETIC ANHYDRIDE (UN1715), THAT IS FLAMMABLE, some of these materials may burn, but none ignite readily.
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- Substance will react with water (some violently), releasing corrosive and/or toxic gases and runoff.
- Flammable/toxic gases may accumulate in confined areas (basement, tanks, hopper/tank cars, etc.).
- Contact with metals may evolve flammable hydrogen gas.
- Containers may explode when heated or if contaminated with water.
- Substance may be transported in a molten form.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate enclosed areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- When material is not involved in fire, do not use water on material itself.

## Small Fire

- Dry chemical or CO<sub>2</sub>.
- Move containers from fire area if you can do it without risk.

## Large Fire

- Flood fire area with large quantities of water, while knocking down Vapours with water fog. If insufficient water supply: knock down Vapours only.

## Fire involving Tanks or Car/Trailer Loads

- Cool containers with flooding quantities of water until well after fire is out.
- Do not get water inside containers.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours; do not put water directly on leak, spill area or inside container.
- Keep combustibles (wood, paper, oil, etc.) away from spilled material.

## Small Spill

- Cover with DRY earth, DRY sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.
- Use clean non-sparking tools to collect material and place it into loosely covered plastic containers for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Removal of solidified molten material from skin requires medical assistance.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- Produce flammable gases on contact with water.
- May ignite on contact with water or moist air.
- Some react vigorously or explosively on contact with water.
- May be ignited by heat, sparks or flames.
- May re-ignite after fire is extinguished.
- Some are transported in highly flammable liquids.
- Runoff may create fire or explosion hazard.

### HEALTH

- Inhalation or contact with Vapours, substance or decomposition products may cause severe injury or death.
- May produce corrosive solutions on contact with water.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate the area before entry.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- DO NOT USE WATER OR FOAM.

#### Small Fire

- Dry chemical, soda ash, lime or sand.

#### Large Fire

- DRY sand, dry chemical, soda ash or lime or withdraw from area and let fire burn.
- Move containers from fire area if you can do it without risk.

#### Fire Involving Metals or Powders (Aluminum, Lithium, Magnesium, etc.)

- Use dry chemical, DRY sand, sodium chloride powder, graphite powder or Met-L-X® powder; in addition, for Lithium you may use Lith-X® powder or copper powder. Also, see GUIDE 170.

#### Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.

#### DO NOT GET WATER on spilled substance or inside containers.

#### Small Spill

- Cover with DRY earth, DRY sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.
- Dike for later disposal: do not apply water unless directed to do so.

#### Powder Spill

- Cover powder spill with plastic sheet or tarp to minimize spreading and keep powder dry.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, wipe from skin immediately; flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- Produce flammable and toxic gases on contact with water.
- May ignite on contact with water or moist air.
- Some react vigorously or explosively on contact with water.
- May be ignited by heat, sparks or flames.
- May re-ignite after fire is extinguished.
- Some are transported in highly flammable liquids.
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

### HEALTH

- Highly toxic: contact with water produces toxic gas, may be fatal if inhaled.
- Inhalation or contact with Vapours, substance or decomposition products may cause severe injury or death.
- May produce corrosive solutions on contact with water.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate the area before entry.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- DO NOT USE WATER OR FOAM. (FOAM MAY BE USED FOR CHLOROSILANES, SEE BELOW)

#### Small Fire

- Dry chemical, soda ash, lime or sand.

#### Large Fire

- DRY sand, dry chemical, soda ash or lime or withdraw from area and let fire burn.
- FOR CHLOROSILANES, DO NOT USE WATER; use AFFF alcohol-resistant medium expansion foam; DO NOT USE dry chemicals, soda ash or lime on chlorosilane fires (large or small) as they may release large quantities of hydrogen gas that may explode.
- Move containers from fire area if you can do it without risk.

#### Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not get water inside containers.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.

#### DO NOT GET WATER on spilled substance or inside containers.

- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- FOR CHLOROSILANES, use AFFF alcohol-resistant medium expansion foam to reduce Vapours.

#### Small Spill

- Cover with DRY earth, DRY sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.
- Dike for later disposal; do not apply water unless directed to do so.

#### Powder Spill

- Cover powder spill with plastic sheet or tarp to minimize spreading and keep powder dry.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, wipe from skin immediately; flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- These substances will accelerate burning when involved in a fire.
- Some may decompose explosively when heated or involved in a fire.
- May explode from heat or contamination.
- Some will react explosively with hydrocarbons (fuels).
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

## HEALTH

- Inhalation, ingestion or contact (skin, eyes) with Vapours or substance may cause severe injury, burns or death.
- Fire may produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Use water. Do not use dry chemicals or foams. CO<sub>2</sub> or Halon® may provide limited control.

## Large Fire

- Flood fire area with water from a distance.
- Do not move cargo or vehicle if cargo has been exposed to heat.
- Move containers from fire area if you can do it without risk.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Do not get water inside containers.

## Small Dry Spill

- With clean shovel place material into clean, dry container and cover loosely; move containers from spill area.

## Small Liquid Spill

- Use a non-combustible material like vermiculite or sand to soak up the product and place into a container for later disposal.

## Large Spill

- Dike far ahead of liquid spill for later disposal.
- Following product recovery, flush area with water.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Contaminated clothing may be a fire risk when dry.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- These substances will accelerate burning when involved in a fire.
- May explode from heat or contamination.
- Some may burn rapidly.
- Some will react explosively with hydrocarbons (fuels).
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

## HEALTH

- Toxic by ingestion.
- Inhalation of dust is toxic.
- Fire may produce irritating, corrosive and/or toxic gases.
- Contact with substance may cause severe burns to skin and eyes.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Use water. Do not use dry chemicals or foams. CO<sub>2</sub> or Halon® may provide limited control.

## Large Fire

- Flood fire area with water from a distance.
- Do not move cargo or vehicle if cargo has been exposed to heat.
- Move containers from fire area if you can do it without risk.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.

## Small Dry Spill

- With clean shovel place material into clean, dry container and cover loosely; move containers from spill area.

## Large Spill

- Dike far ahead of spill for later disposal.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Contaminated clothing may be a fire risk when dry.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- These substances will accelerate burning when involved in a fire.
- May explode from heat or contamination.
- Some will react explosively with hydrocarbons (fuels).
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

## HEALTH

- TOXIC; inhalation, ingestion or contact (skin, eyes) with Vapours or substance may cause severe injury, burns or death.
- Fire may produce irritating, corrosive and/or toxic gases.
- Toxic/flammable fumes may accumulate in confined areas (basement, tanks, tank cars, etc.).
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Use water. Do not use dry chemicals or foams. CO<sub>2</sub> or Halon® may provide limited control.

## Large Fire

- Flood fire area with water from a distance.
- Do not move cargo or vehicle if cargo has been exposed to heat.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift.
- Do not get water inside containers.

## Small Liquid Spill

- Use a non-combustible material like vermiculite or sand to soak up the product and place into a container for later disposal.

## Large Spill

- Dike far ahead of liquid spill for later disposal.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Contaminated clothing may be a fire risk when dry.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- May explode from friction, heat or contamination.
- These substances will accelerate burning when involved in a fire.
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- Some will react explosively with hydrocarbons (fuels).
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

## HEALTH

- TOXIC; inhalation, ingestion or contact (skin, eyes) with Vapours, dusts or substance may cause severe injury, burns or death.
- Fire may produce irritating and/or toxic gases.
- Toxic fumes or dust may accumulate in confined areas (basement, tanks, hopper/tank cars, etc.).
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Use water. Do not use dry chemicals or foams. CO<sub>2</sub> or Halon® may provide limited control.

## Large Fire

- Flood fire area with water from a distance.
- Do not move cargo or vehicle if cargo has been exposed to heat.
- Move containers from fire area if you can do it without risk.
- Do not get water inside containers: a violent reaction may occur.

## Fire involving Tanks or Car/Trailer Loads

- Cool containers with flooding quantities of water until well after fire is out.
- Dike fire-control water for later disposal.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Use water spray to reduce Vapours or divert Vapour cloud drift.
- Prevent entry into waterways, sewers, basements or confined areas.

## Small Spill

- Flush area with flooding quantities of water.

## Large Spill

- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Contaminated clothing may be a fire risk when dry.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- May ignite combustibles (wood, paper, oil, clothing, etc.).
- React vigorously and/or explosively with water.
- Produce toxic and/or corrosive substances on contact with water.
- Flammable/toxic gases may accumulate in tanks and hopper cars.
- Some may produce flammable hydrogen gas upon contact with metals.
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

## HEALTH

- TOXIC; inhalation or contact with Vapour, substance, or decomposition products may cause severe injury or death.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- DO NOT USE WATER OR FOAM.

## Small Fire

- Dry chemical, soda ash or lime.

## Large Fire

- DRY sand, dry chemical, soda ash or lime or withdraw from area and let fire burn.
- Do not move cargo or vehicle if cargo has been exposed to heat.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- DO NOT GET WATER on spilled substance or inside containers.

## Small Spill

- Cover with DRY earth, DRY sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.

## Large Spill

- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Contaminated clothing may be a fire risk when dry.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- May explode from heat or contamination.
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- May be ignited by heat, sparks or flames.
- May burn rapidly with flare-burning effect.
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

### HEALTH

- Fire may produce irritating, corrosive and/or toxic gases.
- Ingestion or contact (skin, eyes) with substance may cause severe injury or burns.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

### EVACUATION

#### Large Spill

- Consider initial evacuation for at least 250 meters (800 feet) in all directions.

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

#### Small Fire

- Water spray or fog is preferred; if water not available use dry chemical, CO<sub>2</sub> or regular foam.

#### Large Fire

- Flood fire area with water from a distance.
- Use water spray or fog; do not use straight streams.
- Do not move cargo or vehicle if cargo has been exposed to heat.
- Move containers from fire area if you can do it without risk.

#### Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Keep substance wet using water spray.
- Stop leak if you can do it without risk.

#### Small Spill

- Take up with inert, damp, non-combustible material using clean non-sparking tools and place into loosely covered plastic containers for later disposal.

#### Large Spill

- Wet down with water and dike for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Contaminated clothing may be a fire risk when dry.
- Remove material from skin immediately.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- May explode from heat, shock, friction or contamination.
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- May be ignited by heat, sparks or flames.
- May burn rapidly with flare-burning effect.
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

## HEALTH

- Fire may produce irritating, corrosive and/or toxic gases.
- Ingestion or contact (skin, eyes) with substance may cause severe injury or burns.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial evacuation for at least 250 meters (800 feet) in all directions.

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Water spray or fog is preferred; if water not available use dry chemical, CO<sub>2</sub> or regular foam.

## Large Fire

- Flood fire area with water from a distance.
- Use water spray or fog; do not use straight streams.
- Do not move cargo or vehicle if cargo has been exposed to heat.
- Move containers from fire area if you can do it without risk.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Keep substance wet using water spray.
- Stop leak if you can do it without risk.

## Small Spill

- Take up with inert, damp, non-combustible material using clean non-sparking tools and place into loosely covered plastic containers for later disposal.

## Large Spill

- Wet down with water and dike for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Contaminated clothing may be a fire risk when dry.
- Remove material from skin immediately.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- Lithium ion batteries contain flammable liquid electrolyte that may vent, ignite and produce sparks when subjected to high temperatures (> 150 OC (302 OF)), when damaged or abused (e.g., mechanical damage or electrical overcharging).
- May burn rapidly with flare-burning effect.
- May ignite other batteries in close proximity.

## HEALTH

- Contact with battery electrolyte may be irritating to skin, eyes and mucous membranes.
- Fire will produce irritating, corrosive and/or toxic gases.
- Burning batteries may produce toxic hydrogen fluoride gas (see GUIDE 125).
- Fumes may cause dizziness or suffocation.

## PUBLIC SAFETY

- CALL Emergency Response Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- If rail car or trailer is involved in a fire, ISOLATE for 500 meters (1/3 mile) in all directions; also initiate evacuation including emergency responders for 500 meters (1/3 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

## Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.
- Absorb with earth, sand or other non-combustible material.
- Leaking batteries and contaminated absorbent material should be placed in metal containers.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- May explode from heat, contamination or loss of temperature control.
- These materials are particularly sensitive to temperature rises. Above a given "Control Temperature" they decompose violently and catch fire.
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- May ignite spontaneously if exposed to air.
- May be ignited by heat, sparks or flames.
- May burn rapidly with flare-burning effect.
- Containers may explode when heated.
- Runoff may create fire or explosion hazard.

## HEALTH

- Fire may produce irritating, corrosive and/or toxic gases.
- Ingestion or contact (skin, eyes) with substance may cause severe injury or burns.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- DO NOT allow the substance to warm up. Obtain liquid nitrogen (wear thermal protective clothing, see GUIDE 120), dry ice or ice for cooling. If this is not possible or none can be obtained, evacuate the area immediately.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial evacuation for at least 250 meters (800 feet) in all directions.

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- The temperature of the substance must be maintained at or below the "Control Temperature" at all times.

## Small Fire

- Water spray or fog is preferred; if water not available use dry chemical, CO<sub>2</sub> or regular foam.

## Large Fire

- Flood fire area with water from a distance.
- Use water spray or fog; do not use straight streams.
- Do not move cargo or vehicle if cargo has been exposed to heat.
- Move containers from fire area if you can do it without risk.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- BEWARE OF POSSIBLE CONTAINER EXPLOSION.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.

## Small Spill

- Take up with inert, damp, non-combustible material using clean non-sparking tools and place into loosely covered plastic containers for later disposal.

## Large Spill

- Dike far ahead of liquid spill for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- Contaminated clothing may be a fire risk when dry.
- Remove material from skin immediately.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- Self-decomposition or self-ignition may be triggered by heat, chemical reaction, friction or impact.
- May be ignited by heat, sparks or flames.
- Some may decompose explosively when heated or involved in a fire.
- May burn violently. Decomposition may be self-accelerating and produce large amounts of gases.
- Vapours or dust may form explosive mixtures with air.

## HEALTH

- Inhalation or contact with Vapours, substance or decomposition products may cause severe injury or death.
- May produce irritating, toxic and/or corrosive gases.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 250 meters (800 feet) in all directions.

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

## Large Fire

- Flood fire area with water from a distance.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks or Car/Trailer Loads

- BEWARE OF POSSIBLE CONTAINER EXPLOSION.
- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.

## Small Spill

- Take up with inert, damp, non-combustible material using clean non-sparking tools and place into loosely covered plastic containers for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- Self-decomposition or self-ignition may be triggered by heat, chemical reaction, friction or impact.
- Self-accelerating decomposition may occur if the specific control temperature is not maintained.
- These materials are particularly sensitive to temperature rises. Above a given "Control Temperature" they decompose violently and catch fire.
- May be ignited by heat, sparks or flames.
- Some may decompose explosively when heated or involved in a fire.
- May burn violently. Decomposition may be self-accelerating and produce large amounts of gases.
- Vapours or dust may form explosive mixtures with air.

## HEALTH

- Inhalation or contact with Vapours, substance or decomposition products may cause severe injury or death.
- May produce irritating, toxic and/or corrosive gases.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- DO NOT allow the substance to warm up. Obtain liquid nitrogen (wear thermal protective clothing, see GUIDE 120), dry ice or ice for cooling. If this is not possible or none can be obtained, evacuate the area immediately.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial evacuation for at least 250 meters (800 feet) in all directions.

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- The temperature of the substance must be maintained at or below the "Control Temperature" at all times.

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

## Large Fire

- Flood fire area with water from a distance.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks or Car/Trailer Loads

- BEWARE OF POSSIBLE CONTAINER EXPLOSION.
- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.

## Small Spill

- Take up with inert, damp, non-combustible material using clean non-sparking tools and place into loosely covered plastic containers for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

## HEALTH

- Highly toxic, may be fatal if inhaled, swallowed or absorbed through skin.
- Avoid any skin contact.
- Effects of contact or inhalation may be delayed.
- Fire may produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may be corrosive and/or toxic and cause pollution.

## FIRE OR EXPLOSION

- Non-combustible, substance itself does not burn but may decompose upon heating to produce corrosive and/or toxic fumes.
- Containers may explode when heated.
- Runoff may pollute waterways.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For non-highlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, CO<sub>2</sub> or water spray.

## Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal; do not scatter the material.
- Use water spray or fog; do not use straight streams.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- Cover with plastic sheet to prevent spreading.
- Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.
- DO NOT GET WATER INSIDE CONTAINERS.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- Highly toxic, may be fatal if inhaled, swallowed or absorbed through skin.
- Contact with molten substance may cause severe burns to skin and eyes.
- Avoid any skin contact.
- Effects of contact or inhalation may be delayed.
- Fire may produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may be corrosive and/or toxic and cause pollution.

## FIRE OR EXPLOSION

- Combustible material: may burn but does not ignite readily.
- Containers may explode when heated.
- Runoff may pollute waterways.
- Substance may be transported in a molten form.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For non-highlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, CO<sub>2</sub> or water spray.

## Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal; do not scatter the material.
- Use water spray or fog; do not use straight streams.

## Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- Cover with plastic sheet to prevent spreading.
- Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.
- DO NOT GET WATER INSIDE CONTAINERS.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### HEALTH

- TOXIC; inhalation, ingestion or skin contact with material may cause severe injury or death.
- Contact with molten substance may cause severe burns to skin and eyes.
- Avoid any skin contact.
- Effects of contact or inhalation may be delayed.
- Fire may produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may be corrosive and/or toxic and cause pollution.

### FIRE OR EXPLOSION

- Combustible material: may burn but does not ignite readily.
- When heated, Vapours may form explosive mixtures with air: indoors, outdoors and sewers explosion hazards.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Contact with metals may evolve flammable hydrogen gas.
- Containers may explode when heated.
- Runoff may pollute waterways.
- Substance may be transported in a molten form.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate enclosed areas.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For non-highlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

#### Small Fire

- Dry chemical, CO<sub>2</sub> or water spray.

#### Large Fire

- Dry chemical, CO<sub>2</sub>, alcohol-resistant foam or water spray.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal; do not scatter the material.

#### Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.
- DO NOT GET WATER INSIDE CONTAINERS.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### HEALTH

- TOXIC; inhalation, ingestion or skin contact with material may cause severe injury or death.
- Contact with molten substance may cause severe burns to skin and eyes.
- Avoid any skin contact.
- Effects of contact or inhalation may be delayed.
- Fire may produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may be corrosive and/or toxic and cause pollution.

### FIRE OR EXPLOSION

- Non-combustible, substance itself does not burn but may decompose upon heating to produce corrosive and/or toxic fumes.
- Some are oxidizers and may ignite combustibles (wood, paper, oil, clothing, etc.).
- Contact with metals may evolve flammable hydrogen gas.
- Containers may explode when heated.
- For UN3171, if Lithium ion batteries are involved, also consult GUIDE 147.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate enclosed areas.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

#### Small Fire

- Dry chemical, CO<sub>2</sub> or water spray.

#### Large Fire

- Dry chemical, CO<sub>2</sub>, alcohol-resistant foam or water spray.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal; do not scatter the material.

#### Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers.
- DO NOT GET WATER INSIDE CONTAINERS.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- HIGHLY FLAMMABLE: Will be easily ignited by heat, sparks or flames.
- Vapours form explosive mixtures with air: indoors, outdoors and sewers explosion hazards.
- Most Vapours are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Vapours may travel to source of ignition and flash back.
- Those substances designated with a (P) may polymerize explosively when heated or involved in a fire.
- Substance will react with water (some violently) releasing flammable, toxic or corrosive gases and runoff.
- Contact with metals may evolve flammable hydrogen gas.
- Containers may explode when heated or if contaminated with water.

## HEALTH

- TOXIC; inhalation, ingestion or contact (skin, eyes) with Vapours, dusts or substance may cause severe injury, burns or death.
- Bromoacetates and chloroacetates are extremely irritating/lachrymators.
- Reaction with water or moist air will release toxic, corrosive or flammable gases.
- Reaction with water may generate much heat that will increase the concentration of fumes in the air.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may be corrosive and/or toxic and cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate enclosed areas.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- Note: Most foams will react with the material and release corrosive/toxic gases.

CAUTION: For Acetyl chloride (UN1717), use CO<sub>2</sub> or dry chemical only.

## Small Fire

- CO<sub>2</sub>, dry chemical, dry sand, alcohol-resistant foam.

## Large Fire

- Water spray, fog or alcohol-resistant foam.
- FOR CHLOROSILANES, DO NOT USE WATER; use AFFF alcohol-resistant medium expansion foam.
- Move containers from fire area if you can do it without risk.
- Use water spray or fog; do not use straight streams.

## Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- A Vapour suppressing foam may be used to reduce Vapours.
- FOR CHLOROSILANES, use AFFF alcohol-resistant medium expansion foam to reduce Vapours.
- DO NOT GET WATER on spilled substance or inside containers.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Prevent entry into waterways, sewers, basements or confined areas.

## Small Spill

- Cover with DRY earth, DRY sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.
- Use clean non-sparking tools to collect material and place it into loosely covered plastic containers for later disposal.

## FIRST AID

- Move victim to fresh air. • Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- Combustible material: may burn but does not ignite readily.
- Substance will react with water (some violently) releasing flammable, toxic or corrosive gases and runoff.
- When heated, Vapours may form explosive mixtures with air: indoors, outdoors and sewers explosion hazards.
- Most Vapours are heavier than air. They will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Vapours may travel to source of ignition and flash back.
- Contact with metals may evolve flammable hydrogen gas.
- Containers may explode when heated or if contaminated with water.

### HEALTH

- TOXIC; inhalation, ingestion or contact (skin, eyes) with Vapours, dusts or substance may cause severe injury, burns or death.
- Contact with molten substance may cause severe burns to skin and eyes.
- Reaction with water or moist air will release toxic, corrosive or flammable gases.
- Reaction with water may generate much heat that will increase the concentration of fumes in the air.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may be corrosive and/or toxic and cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate enclosed areas.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Note: Most foams will react with the material and release corrosive/toxic gases.

#### Small Fire

- CO<sub>2</sub>, dry chemical, dry sand, alcohol-resistant foam.

#### Large Fire

- Water spray, fog or alcohol-resistant foam.
- FOR CHLOROSILANES, DO NOT USE WATER; use AFFF alcohol-resistant medium expansion foam.
- Move containers from fire area if you can do it without risk.
- Use water spray or fog; do not use straight streams.

#### Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- A Vapour suppressing foam may be used to reduce Vapours.
- FOR CHLOROSILANES, use AFFF alcohol-resistant medium expansion foam to reduce Vapours.
- DO NOT GET WATER on spilled substance or inside containers.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Prevent entry into waterways, sewers, basements or confined areas.

#### Small Spill

- Cover with DRY earth, DRY sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.
- Use clean non-sparking tools to collect material and place it into loosely covered plastic containers for later disposal.

### FIRST AID

- Move victim to fresh air. • Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

### HEALTH

- TOXIC; inhalation, ingestion or contact (skin, eyes) with Vapours, dusts or substance may cause severe injury, burns or death.
- Reaction with water or moist air may release toxic, corrosive or flammable gases.
- Reaction with water may generate much heat that will increase the concentration of fumes in the air.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may be corrosive and/or toxic and cause pollution.

### FIRE OR EXPLOSION

- Non-combustible, substance itself does not burn but may decompose upon heating to produce corrosive and/or toxic fumes.
- For UN1796, UN1826, UN2031 at high concentrations and for UN2032, these may act as oxidizers, also consult GUIDE 140.
- Vapours may accumulate in confined areas (basement, tanks, hopper/tank cars etc.).
- Substance may react with water (some violently), releasing corrosive and/or toxic gases and runoff.
- Contact with metals may evolve flammable hydrogen gas.
- Containers may explode when heated or if contaminated with water.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate enclosed areas.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Note: Some foams will react with the material and release corrosive/toxic gases.

#### Small Fire

- CO<sub>2</sub> (except for Cyanides), dry chemical, dry sand, alcohol-resistant foam.

#### Large Fire

- Water spray, fog or alcohol-resistant foam.
- Move containers from fire area if you can do it without risk.
- Use water spray or fog; do not use straight streams.
- Dike fire-control water for later disposal; do not scatter the material.

#### Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- A Vapour suppressing foam may be used to reduce Vapours.
- DO NOT GET WATER INSIDE CONTAINERS.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Prevent entry into waterways, sewers, basements or confined areas.

#### Small Spill

- Cover with DRY earth, DRY sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.
- Use clean non-sparking tools to collect material and place it into loosely covered plastic containers for later disposal.

### FIRST AID

- Move victim to fresh air. • Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- In case of contact with Hydrofluoric acid (UN1790), flush skin and eyes with water for 5 minutes; then, for skin exposures rub on a calcium/gel combination; for eyes flush with a water/calcium solution if available, otherwise continue with water for 15 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- Inhalation or contact with substance may cause infection, disease or death.
- Runoff from fire control may cause pollution.
- Note: Damaged packages containing solid CO<sub>2</sub> as a refrigerant may produce water or frost from condensation of air. Do not touch this liquid as it could be contaminated by the contents of the parcel.

## FIRE OR EXPLOSION

- Some of these materials may burn, but none ignite readily.
- Some may be transported in flammable liquids.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Obtain identity of substance involved.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, soda ash, lime or sand.

## Large Fire

- Use extinguishing agent suitable for type of surrounding fire.
- Do not scatter spilled material with high pressure water streams.
- Move containers from fire area if you can do it without risk.

## SPILL OR LEAK

- Do not touch or walk through spilled material.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Absorb with earth, sand or other non-combustible material.
- Cover damaged package or spilled material with damp towel or rag and keep wet with liquid bleach or other disinfectant.
- DO NOT CLEAN-UP OR DISPOSE OF, EXCEPT UNDER SUPERVISION OF A SPECIALIST.

## FIRST AID

- Move victim to a safe isolated area.

## CAUTION: Victim may be a source of contamination.

- Call 108 or emergency medical service.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- For further assistance, contact your local Poison Control Center.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- Inhalation of Vapours or dust is extremely irritating.
- May cause burning of eyes and flow of tears.
- May cause coughing, difficult breathing and nausea.
- Brief exposure effects last only a few minutes.
- Exposure in an enclosed area may be very harmful.
- Fire will produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may cause pollution.

## FIRE OR EXPLOSION

- Some of these materials may burn, but none ignite readily.
- Containers may explode when heated.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

## Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal; do not scatter the material.

## Fire involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Do not get water inside containers.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.

## Small Spill

- Take up with sand or other non-combustible absorbent material and place into containers for later disposal.

## Large Spill

- Dike far ahead of liquid spill for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Do not use mouth-to-mouth method if victim ingested or inhaled the substance; give artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Keep victim warm and quiet.
- Effects should disappear after individual has been exposed to fresh air for approximately 10 minutes.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- Toxic by ingestion.
- Vapours may cause dizziness or suffocation.
- Exposure in an enclosed area may be very harmful.
- Contact may irritate or burn skin and eyes.
- Fire may produce irritating and/or toxic gases.
- Runoff from fire control or dilution water may cause pollution.

## FIRE OR EXPLOSION

- Some of these materials may burn, but none ignite readily.
- Most Vapours are heavier than air.
- Air/Vapour mixtures may explode when ignited.
- Container may explode in heat of fire.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer.
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, CO<sub>2</sub> or water spray.

## Large Fire

- Dry chemical, CO<sub>2</sub>, alcohol-resistant foam or water spray.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal; do not scatter the material.

## Fire Involving Tanks or Car/Trailer Loads

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Stop leak if you can do it without risk.

## Small Liquid Spill

- Take up with sand, earth or other non-combustible absorbent material.

## Large Spill

- Dike far ahead of liquid spill for later disposal.
- Prevent entry into waterways, sewers, basements or confined areas.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- For minor skin contact, avoid spreading material on unaffected skin.
- Wash skin with soap and water.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

### HEALTH

- Radiation presents minimal risk to transport workers, emergency response personnel and the public during transportation accidents. Packaging durability increases as potential hazard of radioactive content increases.
- Very low levels of contained radioactive materials and low radiation levels outside packages result in low risks to people. Damaged packages may release measurable amounts of radioactive material, but the resulting risks are expected to be low.
- Some radioactive materials cannot be detected by commonly available instruments.
- Packages do not have RADIOACTIVE I, II, or III labels. Some may have EMPTY labels or may have the word "Radioactive" in the package marking.

### FIRE OR EXPLOSION

- Some of these materials may burn, but most do not ignite readily.
- Many have cardboard outer packaging; content (physically large or small) can be of many different physical forms.
- Radioactivity does not change flammability or other properties of materials.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- Priorities for rescue, life-saving, first aid, fire control and other hazards are higher than the priority for measuring radiation levels.
- Radiation Authority must be notified of accident conditions. Radiation Authority is usually responsible for decisions about radiological consequences and closure of emergencies.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.
- Stay upwind.
- Keep unauthorized personnel away.
- Detain or isolate uninjured persons or equipment suspected to be contaminated; delay decontamination and cleanup until instructions are received from Radiation Authority.

### PROTECTIVE CLOTHING

- Positive pressure self-contained breathing apparatus (SCBA) and structural firefighters' protective clothing will provide adequate protection.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

#### Fire

- When a large quantity of this material is involved in a major fire, consider an initial evacuation distance of 300 meters (1000 feet) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Presence of radioactive material will not influence the fire control processes and should not influence selection of techniques.
- Move containers from fire area if you can do it without risk.
- Do not move damaged packages; move undamaged packages out of fire zone.

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

#### Large Fire

- Water spray, fog (flooding amounts).

### SPILL OR LEAK

- Do not touch damaged packages or spilled material.
- Cover liquid spill with sand, earth or other non-combustible absorbent material.
- Cover powder spill with plastic sheet or tarp to minimize spreading.

### FIRST AID

- Call 108 or emergency medical service.
- Medical problems take priority over radiological concerns.
- Use first aid treatment according to the nature of the injury.
- Do not delay care and transport of a seriously injured person.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Injured persons contaminated by contact with released material are not a serious hazard to health care personnel, equipment or facilities.
- Ensure that medical personnel are aware of the material(s) involved, take precautions to protect themselves and prevent spread of contamination.

## POTENTIAL HAZARDS

### HEALTH

- Radiation presents minimal risk to transport workers, emergency response personnel and the public during transportation accidents. Packaging durability increases as potential hazard of radioactive content increases.
- Undamaged packages are safe. Contents of damaged packages may cause higher external radiation exposure, or both external and internal radiation exposure if contents are released.
- Low radiation hazard when material is inside container. If material is released from package or bulk container, hazard will vary from low to moderate. Level of hazard will depend on the type and amount of radioactivity, the kind of material it is in, and/or the surfaces it is on.
- Some material may be released from packages during accidents of moderate severity but risks to people are not great.
- Released radioactive materials or contaminated objects usually will be visible if packaging fails.
- Some exclusive use shipments of bulk and packaged materials will not have "RADIOACTIVE" labels. Placards, markings and shipping papers provide identification.
- Some packages may have a "RADIOACTIVE" label and a second hazard label. The second hazard is usually greater than the radiation hazard; so follow this GUIDE as well as the response GUIDE for the second hazard class label.
- Some radioactive materials cannot be detected by commonly available instruments.
- Runoff from control of cargo fire may cause low-level pollution.

### FIRE OR EXPLOSION

- Some of these materials may burn, but most do not ignite readily.
- Uranium and Thorium metal cuttings may ignite spontaneously if exposed to air (see GUIDE 136).
- Nitrates are oxidizers and may ignite other combustibles (see GUIDE 141).

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- Priorities for rescue, life-saving, first aid, fire control and other hazards are higher than the priority for measuring radiation levels.
- Radiation Authority must be notified of accident conditions. Radiation Authority is usually responsible for decisions about radiological consequences and closure of emergencies.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.
- Stay upwind.
- Keep unauthorized personnel away.
- Detain or isolate uninjured persons or equipment suspected to be contaminated; delay decontamination and cleanup until instructions are received from Radiation Authority.

### PROTECTIVE CLOTHING

- Positive pressure self-contained breathing apparatus (SCBA) and structural firefighters' protective clothing will provide adequate protection.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

#### Fire

- When a large quantity of this material is involved in a major fire, consider an initial evacuation distance of 300 meters (1000 feet) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Presence of radioactive material will not influence the fire control processes and should not influence selection of techniques.
- Move containers from fire area if you can do it without risk.
- Do not move damaged packages; move undamaged packages out of fire zone.

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

#### Large Fire

- Water spray, fog (flooding amounts).
- Dike fire-control water for later disposal.

### SPILL OR LEAK

- Do not touch damaged packages or spilled material.
- Cover liquid spill with sand, earth or other non-combustible absorbent material.
- Dike to collect large liquid spills.
- Cover powder spill with plastic sheet or tarp to minimize spreading.

### FIRST AID

- Call 108 or emergency medical service.
- Medical problems take priority over radiological concerns.
- Use first aid treatment according to the nature of the injury.
- Do not delay care and transport of a seriously injured person.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- In case of contact with substance, wipe from skin immediately; flush skin or eyes with running water for at least 20 minutes.
- Injured persons contaminated by contact with released material are not a serious hazard to health care personnel, equipment or facilities.
- Ensure that medical personnel are aware of the material(s) involved, take precautions to protect themselves and prevent spread of contamination.

## POTENTIAL HAZARDS

## HEALTH

- Radiation presents minimal risk to transport workers, emergency response personnel and the public during transportation accidents. Packaging durability increases as potential hazard of radioactive content increases.
- Undamaged packages are safe. Contents of damaged packages may cause higher external radiation exposure, or both external and internal radiation exposure if contents are released.
- Type A packages (cartons, boxes, drums, articles, etc.) identified as "Type A" by marking on packages or by shipping papers contain non-life endangering amounts. Partial releases might be expected if "Type A" packages are damaged in moderately severe accidents.
- Type B packages, and the rarely occurring Type C packages, (large and small, usually metal) contain the most hazardous amounts. They can be identified by package markings or by shipping papers. Life threatening conditions may exist only if contents are released or package shielding fails. Because of design, evaluation and testing of packages, these conditions would be expected only for accidents of utmost severity.
- The rarely occurring "Special Arrangement" shipments may be of Type A, Type B or Type C packages. Package type will be marked on packages, and shipment details will be on shipping papers.
- Radioactive White-I labels indicate radiation levels outside single, isolated, undamaged packages are very low (less than 0.005 mSv/h (0.5 mrem/h)).
- Radioactive Yellow-II and Yellow-III labeled packages have higher radiation levels. The transport index (TI) on the label identifies the maximum radiation level in mrem/h one meter from a single, isolated, undamaged package.
- Some radioactive materials cannot be detected by commonly available instruments.
- Water from cargo fire control may cause pollution.

## FIRE OR EXPLOSION

- Some of these materials may burn, but most do not ignite readily.
- Radioactivity does not change flammability or other properties of materials.
- Type B packages are designed and evaluated to withstand total engulfment in flames at temperatures of 800°C (1475°F) for a period of 30 minutes.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- Priorities for rescue, life-saving, first aid, fire control and other hazards are higher than the priority for measuring radiation levels.
- Radiation Authority must be notified of accident conditions. Radiation Authority is usually responsible for decisions about radiological consequences and closure of emergencies.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions. • Stay upwind. • Keep unauthorized personnel away.
- Detain or isolate uninjured persons or equipment suspected to be contaminated; delay decontamination and cleanup until instructions are received from Radiation Authority.

## PROTECTIVE CLOTHING

- Positive pressure self-contained breathing apparatus (SCBA) and structural firefighters' protective clothing will provide adequate protection against internal radiation exposure, but not external radiation exposure.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- When a large quantity of this material is involved in a major fire, consider an initial evacuation distance of 300 meters (1000 feet) in all directions.

## EMERGENCY RESPONSE

## FIRE

- Presence of radioactive material will not influence the fire control processes and should not influence selection of techniques.
- Move containers from fire area if you can do it without risk.
- Do not move damaged packages; move undamaged packages out of fire zone.

## Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

## Large Fire

- Water spray, fog (flooding amounts).
- Dike fire-control water for later disposal.

## SPILL OR LEAK

- Do not touch damaged packages or spilled material.
- Damp surfaces on undamaged or slightly damaged packages are seldom an indication of packaging failure. Most packaging for liquid content have inner containers and/or inner absorbent materials.
- Cover liquid spill with sand, earth or other non-combustible absorbent material.

## FIRST AID

- Call 108 or emergency medical service.
- Medical problems take priority over radiological concerns.
- Use first aid treatment according to the nature of the injury.
- Do not delay care and transport of a seriously injured person.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Injured persons contaminated by contact with released material are not a serious hazard to health care personnel, equipment or facilities.
- Ensure that medical personnel are aware of the material(s) involved, take precautions to protect themselves and prevent spread of contamination.

## POTENTIAL HAZARDS

### HEALTH

- Undamaged packages are safe; contents of damaged packages may cause external radiation exposure, and much higher external exposure if contents (source capsules) are released.
- Contamination and internal radiation hazards are not expected, but not impossible.
- Type A packages (cartons, boxes, drums, articles, etc.) identified as "Type A" by marking on packages or by shipping papers contain non-life endangering amounts. Radioactive sources may be released if "Type A" packages are damaged in moderately severe accidents.
- Type B packages, and the rarely occurring Type C packages, (large and small, usually metal) contain the most hazardous amounts. They can be identified by package markings or by shipping papers. Life threatening conditions may exist only if contents are released or package shielding fails. Because of design, evaluation and testing of packages, these conditions would be expected only for accidents of utmost severity.
- Radioactive White-I labels indicate radiation levels outside single, isolated, undamaged packages are very low (less than 0.005 mSv/h (0.5 mrem/h)).
- Radioactive Yellow-II and Yellow-III labeled packages have higher radiation levels. The transport index (TI) on the label identifies the maximum radiation level in mrem/h one meter from a single, isolated, undamaged package.
- Radiation from the package contents, usually in durable metal capsules, can be detected by most radiation instruments.
- Water from cargo fire control is not expected to cause pollution.

### FIRE OR EXPLOSION

- Packagings can burn completely without risk of content loss from sealed source capsule.
- Radioactivity does not change flammability or other properties of materials.
- Radioactive source capsules and Type B packages are designed and evaluated to withstand total engulfment in flames at temperatures of 800°C (1475°F) for a period of 30 minutes.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- Priorities for rescue, life-saving, first aid, fire control and other hazards are higher than the priority for measuring radiation levels.
- Radiation Authority must be notified of accident conditions. Radiation Authority is usually responsible for decisions about radiological consequences and closure of emergencies.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.
- Stay upwind.
- Keep unauthorized personnel away.
- Delay final cleanup until instructions or advice is received from Radiation Authority.

### PROTECTIVE CLOTHING

- Positive pressure self-contained breathing apparatus (SCBA) and structural firefighters' protective clothing will provide adequate protection against internal radiation exposure, but not external radiation exposure.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

#### Fire

- When a large quantity of this material is involved in a major fire, consider an initial evacuation distance of 300 meters (1000 feet) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Presence of radioactive material will not influence the fire control processes and should not influence selection of techniques.
- Move containers from fire area if you can do it without risk.
- Do not move damaged packages; move undamaged packages out of fire zone.

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

#### Large Fire

- Water spray, fog (flooding amounts).

### SPILL OR LEAK

- Do not touch damaged packages or spilled material.
- Damp surfaces on undamaged or slightly damaged packages are seldom an indication of packaging failure. Contents are seldom liquid. Content is usually a metal capsule, easily seen if released from package.
- If source capsule is identified as being out of package, DO NOT TOUCH. Stay away and await advice from Radiation Authority.

### FIRST AID

- Call 108 or emergency medical service.
- Medical problems take priority over radiological concerns.
- Use first aid treatment according to the nature of the injury.
- Do not delay care and transport of a seriously injured person.
- Persons exposed to special form sources are not likely to be contaminated with radioactive material.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Injured persons contaminated by contact with released material are not a serious hazard to health care personnel, equipment or facilities.
- Ensure that medical personnel are aware of the material(s) involved, take precautions to protect themselves and prevent spread of contamination.

## POTENTIAL HAZARDS

### HEALTH

- Radiation presents minimal risk to transport workers, emergency response personnel and the public during transportation accidents. Packaging durability increases as potential radiation and criticality hazards of the content increase.
- Undamaged packages are safe. Contents of damaged packages may cause higher external radiation exposure, or both external and internal radiation exposure if contents are released.
- Type AF or IF packages, identified by package markings, do not contain life-threatening amounts of material. External radiation levels are low and packages are designed, evaluated and tested to control releases and to prevent a fission chain reaction under severe transport conditions.
- Type B(U)F, B(M)F and CF packages (identified by markings on packages or shipping papers) contain potentially life endangering amounts. Because of design, evaluation and testing of packages, fission chain reactions are prevented and releases are not expected to be life endangering for all accidents except those of utmost severity.
- The rarely occurring "Special Arrangement" shipments may be of Type AF, BF or CF packages. Package type will be marked on packages, and shipment details will be on shipping papers.
- The transport index (TI) shown on labels or a shipping paper might not indicate the radiation level at one meter from a single, isolated, undamaged package; instead, it might relate to controls needed during transport because of the fissile properties of the materials. Alternatively, the fissile nature of the contents may be indicated by a criticality safety index (CSI) on a special FISSILE label or on the shipping paper.
- Some radioactive materials cannot be detected by commonly available instruments.
- Water from cargo fire control is not expected to cause pollution.

### FIRE OR EXPLOSION

- These materials are seldom flammable. Packages are designed to withstand fires without damage to contents.
- Radioactivity does not change flammability or other properties of materials.
- Type AF, IF, B(U)F, B(M)F and CF packages are designed and evaluated to withstand total engulfment in flames at temperatures of 800°C (1475°F) for a period of 30 minutes.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover
- Priorities for rescue, life-saving, first aid, fire control and other hazards are higher than the priority for measuring radiation levels.
- Radiation Authority must be notified of accident conditions. Radiation Authority is usually responsible for decisions about radiological consequences and closure of emergencies.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions. • Stay upwind. • Keep unauthorized personnel away.
- Detain or isolate uninjured persons or equipment suspected to be contaminated; delay decontamination and cleanup until instructions are received from Radiation Authority.

### PROTECTIVE CLOTHING

- Positive pressure self-contained breathing apparatus (SCBA) and structural firefighters' protective clothing will provide adequate protection against internal radiation exposure, but not external radiation exposure.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

#### Fire

- When a large quantity of this material is involved in a major fire, consider an initial evacuation distance of 300 meters (1000 feet) in all directions.

## EMERGENCY RESPONSE

### FIRE

- Presence of radioactive material will not influence the fire control processes and should not influence selection of techniques.
- Move containers from fire area if you can do it without risk.
- Do not move damaged packages; move undamaged packages out of fire zone.

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

#### Large Fire

- Water spray, fog (flooding amounts).

### SPILL OR LEAK

- Do not touch damaged packages or spilled material.
- Damp surfaces on undamaged or slightly damaged packages are seldom an indication of packaging failure. Most packaging for liquid content have inner containers and/or inner absorbent materials.

#### Liquid Spill

- Package contents are seldom liquid. If any radioactive contamination resulting from a liquid release is present, it probably will be low-level.

### FIRST AID

- Call 108 or emergency medical service.
- Medical problems take priority over radiological concerns.
- Use first aid treatment according to the nature of the injury.
- Do not delay care and transport of a seriously injured person.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Injured persons contaminated by contact with released material are not a serious hazard to health care personnel, equipment or facilities.
- Ensure that medical personnel are aware of the material(s) involved, take precautions to protect themselves and prevent spread of contamination.



## POTENTIAL HAZARDS

### HEALTH

- Radiation presents minimal risk to transport workers, emergency response personnel and the public during transportation accidents. Packaging durability increases as potential radiation and criticality hazards of the content increase.
- Chemical hazard greatly exceeds radiation hazard.
- Substance reacts with water and water vapour in air to form toxic and corrosive hydrogen fluoride gas and an extremely irritating and corrosive, white-colored, water-soluble residue.
- If inhaled, may be fatal.
- Direct contact causes burns to skin, eyes, and respiratory tract.
- Low-level radioactive material; very low radiation hazard to people.
- Runoff from control of cargo fire may cause low-level pollution.

### FIRE OR EXPLOSION

- Substance does not burn.
- The material may react violently with fuels.
- Containers in protective overpacks (horizontal cylindrical shape with short legs for tie-downs), are identified with "AF", "B(U)F" or "H(U)" on shipping papers or by markings on the overpacks. They are designed and evaluated to withstand severe conditions including total engulfment in flames at temperatures of 800°C (1475°F) for a period of 30 minutes.
- Bare filled cylinders, identified with UN2978 as part of the marking (may also be marked H(U) or H(M)), may rupture in heat of engulfing fire; bare empty (except for residue) cylinders will not rupture in fires.
- Radioactivity does not change flammability or other properties of materials.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- Priorities for rescue, life-saving, first aid, fire control and other hazards are higher than the priority for measuring radiation levels.
- Radiation Authority must be notified of accident conditions. Radiation Authority is usually responsible for decisions about radiological consequences and closure of emergencies.
- As an immediate precautionary measure, isolate spill or leak area for at least 25 meters (75 feet) in all directions.
- Stay upwind.
- Keep unauthorized personnel away.
- Detain or isolate uninjured persons or equipment suspected to be contaminated; delay decontamination and cleanup until instructions are received from Radiation Authority.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances.

#### Fire

- When a large quantity of this material is involved in a major fire, consider an initial evacuation distance of 300 meters (1000 feet) in all directions. also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- DO NOT USE WATER OR FOAM ON MATERIAL ITSELF.
- Move containers from fire area if you can do it without risk.

#### Small Fire

- Dry chemical or CO<sub>2</sub>.

#### Large Fire

- Water spray, fog or regular foam.
- Cool containers with flooding quantities of water until well after fire is out.
- If this is impossible, withdraw from area and let fire burn.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- Do not touch damaged packages or spilled material.
- Without fire or smoke, leak will be evident by visible and irritating Vapours and residue forming at the point of release.
- Use fine water spray to reduce Vapours; do not put water directly on point of material release from container.
- Residue buildup may self-seal small leaks.
- Dike far ahead of spill to collect runoff water.

### FIRST AID

- Call 108 or emergency medical service.
- Medical problems take priority over radiological concerns.
- Use first aid treatment according to the nature of the injury.
- Do not delay care and transport of a seriously injured person.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Effects of exposure (inhalation, ingestion or skin contact) to substance may be delayed.
- Injured persons contaminated by contact with released material are not a serious hazard to health care personnel, equipment or facilities.
- Ensure that medical personnel are aware of the material(s) involved, take precautions to protect themselves and prevent spread of contamination.

## POTENTIAL HAZARDS

## HEALTH

- TOXIC; may be fatal if inhaled.
- Vapours are extremely irritating.
- Contact with gas or liquefied gas will cause burns, severe injury and/or frostbite.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Runoff from fire control may cause pollution.

## FIRE OR EXPLOSION

- Substance does not burn but will support combustion.
- This is a strong oxidizer and will react vigorously or explosively with many materials including fuels.
- May ignite combustibles (wood, paper, oil, clothing, etc.).
- Vapour explosion and poison hazard indoors, outdoors or in sewers.
- Containers may explode when heated.
- Ruptured cylinders may rocket.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.
- Always wear thermal protective clothing when handling refrigerated/cryogenic liquids.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances.

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

## Small Fire

- Dry chemical, soda ash, lime or sand.

## Large Fire

- Water spray, fog (flooding amounts).
- Do not get water inside containers.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.
- For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

## SPILL OR LEAK

- Do not touch or walk through spilled material.
- If you have not donned special protective clothing approved for this material, do not expose yourself to any risk of this material touching you.
- Do not direct water at spill or source of leak.
- A fine water spray remotely directed to the edge of the spill pool can be used to direct and maintain a hot flare fire that will burn the spilled material in a controlled manner.
- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Isolate area until gas has dispersed.
- Ventilate the area.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Clothing frozen to the skin should be thawed before being removed.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- TOXIC; Extremely Hazardous.
- Inhalation extremely dangerous; may be fatal.
- Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite.
- Odorless, will not be detected by sense of smell.

## FIRE OR EXPLOSION

- EXTREMELY FLAMMABLE.
- May be ignited by heat, sparks or flames.
- Flame may be invisible.
- Containers may explode when heated.
- Vapour explosion and poison hazard indoors, outdoors or in sewers.
- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Vapours may travel to source of ignition and flash back.
- Runoff may create fire or explosion hazard.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions.
- Keep unauthorized personnel away.
- Stay upwind.
- Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks).
- Keep out of low areas.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear chemical protective clothing that is specifically recommended by the manufacturer. It may provide little or no thermal protection.
- Structural firefighters' protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations where direct contact with the substance is possible.
- Always wear thermal protective clothing when handling refrigerated/cryogenic liquids.

## EVACUATION

## Spill

- See Table 1 - Initial Isolation and Protective Action Distances.

## Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- DO NOT EXTINGUISH A LEAKING GAS FIRE UNLESS LEAK CAN BE STOPPED.

## Small Fire

- Dry chemical, CO<sub>2</sub> or water spray.

## Large Fire

- Water spray, fog or regular foam.
- Move containers from fire area if you can do it without risk.

## Fire involving Tanks

- Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.
- Cool containers with flooding quantities of water until well after fire is out.
- Do not direct water at source of leak or safety devices; icing may occur.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

## SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- All equipment used when handling the product must be grounded.
- Fully encapsulating, Vapour protective clothing should be worn for spills and leaks with no fire.
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Use water spray to reduce Vapours or divert Vapour cloud drift. Avoid allowing water runoff to contact spilled material.
- Do not direct water at spill or source of leak.
- If possible, turn leaking containers so that gas escapes rather than liquid.
- Prevent entry into waterways, sewers, basements or confined areas.
- Isolate area until gas has dispersed.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- In case of contact with liquefied gas, thaw frosted parts with lukewarm water.
- Keep victim warm and quiet.
- Keep victim under observation.
- Effects of contact or inhalation may be delayed.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## FIRE OR EXPLOSION

- Substance is transported in molten form at a temperature above 705°C (1300°F).
- Violent reaction with water; contact may cause an explosion or may produce a flammable gas.
- Will ignite combustible materials (wood, paper, oil, debris, etc.).
- Contact with nitrates or other oxidizers may cause an explosion.
- Contact with containers or other materials, including cold, wet or dirty tools, may cause an explosion.
- Contact with concrete will cause spalling and small pops.

## HEALTH

- Contact causes severe burns to skin and eyes.
- Fire may produce irritating and/or toxic gases.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Keep unauthorized personnel away.
- Ventilate closed spaces before entering.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Wear flame retardant structural firefighters' protective clothing, including faceshield, helmet and gloves, this will provide limited thermal protection.

## EMERGENCY RESPONSE

## FIRE

- Do Not Use Water, except in life threatening situations and then only in a fine spray.
- Do not use halogenated extinguishing agents or foam.
- Move combustibles out of path of advancing pool if you can do so without risk.
- Extinguish fires started by molten material by using appropriate method for the burning material; keep water, halogenated extinguishing agents and foam away from the molten material.

## SPILL OR LEAK

- Do not touch or walk through spilled material.
- Do not attempt to stop leak, due to danger of explosion.
- Keep combustibles (wood, paper, oil, etc.) away from spilled material.
- Substance is very fluid, spreads quickly, and may splash. Do not try to stop it with shovels or other objects.
- Dike far ahead of spill; use dry sand to contain the flow of material.
- Where possible allow molten material to solidify naturally.
- Avoid contact even after material solidifies. Molten, heated and cold aluminum look alike; do not touch unless you know it is cold.
- Clean up under the supervision of an expert after material has solidified.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- For severe burns, immediate medical attention is required.
- Removal of solidified molten material from skin requires medical assistance.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.

## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- May react violently or explosively on contact with water.
- Some are transported in flammable liquids.
- May be ignited by friction, heat, sparks or flames.
- Some of these materials will burn with intense heat.
- Dusts or fumes may form explosive mixtures in air.
- Containers may explode when heated.
- May re-ignite after fire is extinguished.

### HEALTH

- Oxides from metallic fires are a severe health hazard.
- Inhalation or contact with substance or decomposition products may cause severe injury or death.
- Fire may produce irritating, corrosive and/or toxic gases.
- Runoff from fire control or dilution water may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Stay upwind.
- Keep unauthorized personnel away.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

### EVACUATION

#### Large Spill

- Consider initial downwind evacuation for at least 50 meters (160 feet).

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

- DO NOT USE WATER, FOAM OR CO<sub>2</sub>.
- Dousing metallic fires with water will generate hydrogen gas, an extremely dangerous explosion hazard, particularly if fire is in a confined environment (i.e., building, cargo hold, etc.).
- Use DRY sand, graphite powder, dry sodium chloride based extinguishers, G-1® or Met-L-X® powder.
- Confining and smothering metal fires is preferable rather than applying water.
- Move containers from fire area if you can do it without risk.

#### Fire involving Tanks or Car/Trailer Loads

- If impossible to extinguish, protect surroundings and allow fire to burn itself out.

### SPILL OR LEAK

- ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area).
- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.



## POTENTIAL HAZARDS

### FIRE OR EXPLOSION

- Some may burn but none ignite readily.
- Containers may explode when heated.
- Some may be transported hot.

### HEALTH

- Inhalation of material may be harmful.
- Contact may cause burns to skin and eyes.
- Inhalation of Asbestos dust may have a damaging effect on the lungs.
- Fire may produce irritating, corrosive and/or toxic gases.
- Some liquids produce Vapours that may cause dizziness or suffocation.
- Runoff from fire control may cause pollution.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area in all directions for at least 50 meters (150 feet) for liquids and at least 25 meters (75 feet) for solids.
- Keep unauthorized personnel away.
- Stay upwind.

### PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

### EVACUATION

#### Spill

- See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For nonhighlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under "PUBLIC SAFETY".

#### Fire

- If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also, consider initial evacuation for 800 meters (1/2 mile) in all directions.

## EMERGENCY RESPONSE

### FIRE

#### Small Fire

- Dry chemical, CO<sub>2</sub>, water spray or regular foam.

#### Large Fire

- Water spray, fog or regular foam.
- Do not scatter spilled material with high pressure water streams.
- Move containers from fire area if you can do it without risk.
- Dike fire-control water for later disposal.

#### Fire involving Tanks

- Cool containers with flooding quantities of water until well after fire is out.
- Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank.
- ALWAYS stay away from tanks engulfed in fire.

### SPILL OR LEAK

- Do not touch or walk through spilled material.
- Stop leak if you can do it without risk.
- Prevent dust cloud.
- Avoid inhalation of asbestos dust.

#### Small Dry Spill

- With clean shovel place material into clean, dry container and cover loosely; move containers from spill area.

#### Small Spill

- Take up with sand or other non-combustible absorbent material and place into containers for later disposal.

#### Large Spill

- Dike far ahead of liquid spill for later disposal.
- Cover powder spill with plastic sheet or tarp to minimize spreading.
- Prevent entry into waterways, sewers, basements or confined areas.

### FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

## POTENTIAL HAZARDS

## HEALTH

- Inhalation of Vapours or contact with substance will result in contamination and potential harmful effects.
- Fire will produce irritating, corrosive and/or toxic gases.

## FIRE OR EXPLOSION

- Non-combustible, substance itself does not burn but may react upon heating to produce corrosive and/or toxic fumes.
- Runoff may pollute waterways.

## PUBLIC SAFETY

- CALL EMERGENCY RESPONSE Telephone Number on Shipping Paper first. If Shipping Paper not available or no answer, refer to appropriate telephone number listed on the inside back cover.
- As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions.
- Stay upwind.
- Keep unauthorized personnel away.

## PROTECTIVE CLOTHING

- Wear positive pressure self-contained breathing apparatus (SCBA).
- Structural firefighters' protective clothing will only provide limited protection.

## EVACUATION

## Large Spill

- Consider initial downwind evacuation for at least 100 meters (330 feet).

## Fire

- When any large container is involved in a fire, consider initial evacuation for 500 meters (1/3 mile) in all directions.

## EMERGENCY RESPONSE

## FIRE

- Use extinguishing agent suitable for type of surrounding fire.
- Do not direct water at the heated metal.

## SPILL OR LEAK

- Do not touch or walk through spilled material.
- Do not touch damaged containers or spilled material unless wearing appropriate protective clothing.
- Stop leak if you can do it without risk.
- Prevent entry into waterways, sewers, basements or confined areas.
- Do not use steel or aluminum tools or equipment.
- Cover with earth, sand or other non-combustible material followed with plastic sheet to minimize spreading or contact with rain.
- For mercury, use a mercury spill kit.
- Mercury spill areas may be subsequently treated with calcium sulphide/calcium sulfide or with sodium thiosulphate/sodium thiosulfate wash to neutralize any residual mercury.

## FIRST AID

- Move victim to fresh air.
- Call 108 or emergency medical service.
- Give artificial respiration if victim is not breathing.
- Administer oxygen if breathing is difficult.
- Remove and isolate contaminated clothing and shoes.
- In case of contact with substance, immediately flush skin or eyes with running water for at least 20 minutes.
- Keep victim warm and quiet.
- Ensure that medical personnel are aware of the material(s) involved and take precautions to protect themselves.

INTRODUCTION TO GREEN TABLES - INITIAL ISOLATION  
AND PROTECTIVE ACTION DISTANCES

Table 1 - Initial Isolation and Protective Action Distances suggests distances useful to protect people from Vapours resulting from spills involving dangerous goods that are considered toxic by inhalation (TIH). This list includes certain chemical warfare agents and materials that produce toxic gases upon contact with water. Table 1 provides first responders with initial guidance until technically qualified emergency response personnel are available.

The Initial Isolation Zone defines an area SURROUNDING the incident in which persons may be exposed to dangerous (upwind) and life threatening (downwind) concentrations of material. The Protective Action Zone defines an area DOWNWIND from the incident in which persons may become incapacitated and unable to take protective action and/or incur serious or irreversible health effects. Table 1 provides specific guidance for small and large spills occurring day or night.

Adjusting distances for a specific incident involves many interdependent variables and should be made only by personnel technically qualified to make such adjustments. For this reason, no precise guidance can be provided in this document to aid in adjusting the table distances; however, general guidance follows.

Factors That May Change the Protective Action Distances

The orange-bordered guide for a material clearly indicates under the section EVACUATION – Fire, the evacuation distance required to protect against fragmentation hazard of a large container. If the material becomes involved in a FIRE, the toxic hazard may be less than the fire or explosion hazard. In these cases, the Fire hazard distance should be used.

Initial isolation and protective action distances in this guidebook are derived from historical data on transportation incidents and the use of statistical models. For worst-case scenarios involving the instantaneous release of the entire contents of a package (e.g., as a result of terrorism, sabotage or catastrophic accident) the distances may increase substantially. For such events, doubling of the initial isolation and protective action distances is appropriate in absence of other information.

If more than one tank car containing TIH materials involved in the incident is leaking, LARGE SPILL distances may need to be increased.

For a material with a protective action distance of 11.0+ km (7.0+ miles), the actual distance can be larger in certain atmospheric conditions. If the dangerous goods Vapour plume is channeled in a valley or between many tall buildings, distances may be larger than shown in Table 1 due to less mixing of the plume with the atmosphere. Daytime spills in regions with known strong inversions or snow cover, or occurring near sunset, may require an increase of the protective action distance because airborne contaminants mix and disperse more slowly and may travel much farther downwind. In such cases, the nighttime protective action distance may be more appropriate. In addition, protective action distances may be larger for liquid spills when either the material or outdoor temperature exceeds 30°C (86°F).

Materials which react with water to produce large amounts of toxic gases are included in Table 1 - Initial Isolation and Protective Action Distances. Note that some water-reactive materials (WRM) which are also TIH (e.g., Bromine trifluoride (1746), Thionyl chloride (1836), etc.) produce additional TIH materials when spilled in water. For these materials, two entries are provided in Table 1 - Initial Isolation and Protective Action Distances (i.e., for spills on land and for spills in water). If it is not clear whether the spill is on land or in water, or in cases where the spill occurs both on land and in water, choose the larger Protective Action Distance.

Following Table 1, Table 2 – Water-Reactive Materials Which Produce Toxic Gases lists materials that produce large amounts of Toxic Inhalation Hazard gases (TIH) when spilled in water as well as the toxic gases that are produced when spilled in water.

When a water-reactive TIH producing material is spilled into a river or stream, the source of the toxic gas may move with the current and stretch from the spill point downstream for a substantial distance.

Finally, Table 3 lists Initial Isolation and Protective Action Distances for Toxic Inhalation Hazard materials that may be more commonly encountered.

The selected materials are:

- Ammonia, anhydrous (UN1005)
- Chlorine (UN1017)
- Ethylene oxide (UN1040)
- Hydrogen chloride (UN1050) and Hydrogen chloride, refrigerated liquid (UN2186)
- Hydrogen fluoride (UN1052)
- Sulfur dioxide/Sulphur dioxide (UN1079)

The materials are presented in alphabetical order and provide Initial Isolation and Protective Action Distances for large spills (more than 208 liters) involving different container types (therefore different volume capacities) for day time and night time situations and for different wind speeds.

## PROTECTIVE ACTION DECISION FACTORS TO CONSIDER

The choice of protective actions for a given situation depends on a number of factors. For some cases, evacuation may be the best option; in others, sheltering in-place may be the best course. Sometimes, these two actions may be used in combination. In any emergency, officials need to quickly give the public instructions. The public will need continuing information and instructions while being evacuated or sheltered in-place.

Proper evaluation of the factors listed below will determine the effectiveness of evacuation or in-place protection (shelter in-place). The importance of these factors can vary with emergency conditions. In specific emergencies, other factors may need to be identified and considered as well. This list indicates what kind of information may be needed to make the initial decision.

### The Dangerous Goods

- Degree of health hazard
- Chemical and physical properties
- Amount involved
- Containment/control of release
- Rate of Vapour movement

### The Population Threatened

- Location
- Number of people
- Time available to evacuate or shelter in-place
- Ability to control evacuation or shelter in-place
- Building types and availability
- Special institutions or populations, e.g., nursing homes, hospitals, prisons

### Weather Conditions

- Effect on Vapour and cloud movement
- Potential for change
- Effect on evacuation or shelter in-place

## PROTECTIVE ACTIONS

Protective Actions are those steps taken to preserve the health and safety of emergency responders and the public during an incident involving releases of dangerous goods. Table 1 - Initial Isolation and Protective Action Distances (green-bordered pages) predicts the size of downwind areas which could be affected by a cloud of toxic gas. People in this area should be evacuated and/or sheltered in-place inside buildings.

Isolate Hazard Area and Deny Entry means to keep everybody away from the area if they are not directly involved in emergency response operations. Unprotected emergency responders should not be allowed to enter the isolation zone. This “isolation” task is done first to establish control over the area of operations. This is the first step for any protective actions that may follow. See Table 1 - Initial Isolation and Protective Action Distances (green-bordered pages) for more detailed information on specific materials.

Evacuate means to move all people from a threatened area to a safer place. To perform an evacuation, there must be enough time for people to be warned, to get ready, and to leave an area. If there is enough time, evacuation is the best protective action. Begin evacuating people nearby and those outdoors in direct view of the scene. When additional help arrives, expand the area to be evacuated downwind and crosswind to at least the extent recommended in this guidebook. Even after people move to the distances recommended, they may not be completely safe from harm. They should not be permitted to congregate at such distances. Send evacuees to a definite place, by a specific route, far enough away so they will not have to be moved again if the wind shifts.

Shelter In-Place means people should seek shelter inside a building and remain inside until the danger passes. Sheltering in-place is used when evacuating the public would cause greater risk than staying where they are, or when an evacuation cannot be performed. Direct the people inside to close all doors and windows and to shut off all ventilating, heating and cooling systems. In-place protection (shelter in-place) may not be the best option if (a) the Vapours are flammable; (b) if it will take a long time for the gas to clear the area; or (c) if buildings cannot be closed tightly. Vehicles can offer some protection for a short period if the windows are closed and the ventilating systems are shut off. Vehicles are not as effective as buildings for in-place protection.

It is vital to maintain communications with competent persons inside the building so that they are advised about changing conditions. Persons protected-in-place should be warned to stay far from windows because of the danger from glass and projected metal fragments in a fire and/or explosion.

Every dangerous goods incident is different. Each will have special problems and concerns. Action to protect the public must be selected carefully. These pages can help with initial decisions on how to protect the public. Officials must continue to gather information and monitor the situation until the threat is removed.

## BACKGROUND ON TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

Initial Isolation and Protective Action Distances in this guidebook were determined for small and large spills occurring during day or night. The overall analysis was statistical in nature and utilized state-of-the-art emission rate and dispersion models; statistical release data from the U.S. DOT HMIS (Hazardous Materials Information System) database; meteorological observations from over 120 locations in United States, Canada and Mexico; and the most current toxicological exposure guidelines.

For each chemical, thousands of hypothetical releases were modeled to account for the statistical variation in both release amount and atmospheric conditions. Based on this statistical sample, the 90th percentile Protective Action Distance for each chemical and category was selected to appear in the Table. A brief description of the analysis is provided below. A detailed report outlining the methodology and data used in the generation of the Initial Isolation and Protective Action Distances may be obtained from the U.S. Department of Transportation, Pipeline and Hazardous Materials Safety Administration.

Release amounts and emission rates into the atmosphere were statistically modeled based on (1) data from the U.S. DOT HMIS database; (2) container types and sizes authorized for transport as specified in 49 CFR §172.101 and Part 173; (3) physical properties of the individual materials, and (4) atmospheric data from a historical database. The emission model calculated the release of Vapour due to eVapouration of pools on the ground, direct release of Vapours from the container, or a combination of both, as would occur for liquefied gases which can flash to form both a Vapour/aerosol mixture and an eVapourating pool. In addition, the emission model also calculated the emission of toxic Vapour by-products generated from spilling water-reactive materials in water. Spills that involve releases of approximately 208 liters for liquids and 300 kg for solids (660 pounds) or less are considered Small Spills, while spills that involve greater quantities are considered Large Spills. An exception to this is certain chemical warfare agents where Small Spills include releases up to 2 kg (4.4 lbs), and Large Spills include releases up to 25 kg (55 lbs). These agents are BZ, CX, GA, GB, GD, GF, HD, HL, HN1, HN2, HN3, L and VX.

Downwind dispersion of the Vapour was estimated for each case modeled. Atmospheric parameters affecting the dispersion, and the emission rate, were selected in a statistical fashion from a database containing hourly meteorological data from 120 cities in the United States, Canada and Mexico. The dispersion calculation accounted for the time dependent emission rate from the source as well as the density of the Vapour plume (i.e., heavy gas effects). Since atmospheric mixing is less effective at dispersing Vapour plumes during nighttime, day and night were separated in the analysis. In Table 1, “Day” refers to time periods after sunrise and before sunset, while “Night” includes all hours between sunset and sunrise.

Toxicological short-term exposure guidelines for the materials were applied to determine the downwind distance to which persons may become incapacitated and unable to take protective action or may incur serious health effects after a once-in-a-lifetime, or rare, exposure. When available, toxicological exposure guidelines were chosen from AEGL-2 or ERPG-2 emergency response guidelines, with AEGL-2 values being the first choice. For materials that do not have AEGL-2 or ERPG-2 values, emergency response guidelines estimated from lethal concentration limits derived from animal studies were used, as recommended by an independent panel of toxicological experts from industry and academia.

## HOW TO USE TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES


(1) The responder should already have:

- Identified the material by its ID Number and Name; (if an ID Number cannot be found, use the Name of Material index in the blue-bordered pages to locate that number.)
- Found the three-digit guide for that material in order to consult the emergency actions recommended jointly with this table;
- Noted the wind direction.

(2) Look in Table 1 (the green-bordered pages) for the ID Number and Name of the Material involved in the incident. Some ID Numbers have more than one shipping name listed look for the specific name of the material. (If the shipping name is not known and Table 1 lists more than one name for the same ID Number, use the entry with the largest protective action distances.)

(3) Determine if the incident involves a SMALL or LARGE spill and if DAY or NIGHT. Generally, a SMALL SPILL is one which involves a single, small package (e.g., a drum containing up to approximately 208 liters, a small cylinder, or a small leak from a large package). A LARGE SPILL is one which involves a spill from a large package, or multiple spills from many small packages. DAY is any time after sunrise and before sunset. NIGHT is any time between sunset and sunrise.


(4) Look up the initial ISOLATION distance. Direct all persons to move, in a crosswind direction, away from the spill to the distance specified—in meters and feet.

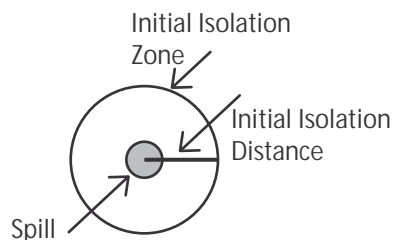

(5) Look up the initial PROTECTIVE ACTION DISTANCE shown in Table 1. For a given material, spill size, and whether day or night, Table 1 gives the downwind distance—in kilometers and miles—for which protective actions should be considered. For practical purposes, the Protective Action Zone (i.e., the area in which people are at risk of harmful exposure) is a square, whose length and width are the same as the downwind distance shown in Table 1.

(6) Initiate Protective Actions to the extent possible, beginning with those closest to the spill site and working away from the site in the downwind direction. When a water-reactive TIH producing material is spilled into a river or stream, the source of the toxic gas may move with the current or stretch from the spill point downstream for a substantial distance.

The shape of the area in which protective actions should be taken (the Protective Action Zone) is shown in this figure. The spill is located at the center of the small circle. The larger circle represents the INITIAL ISOLATION zone around the spill.

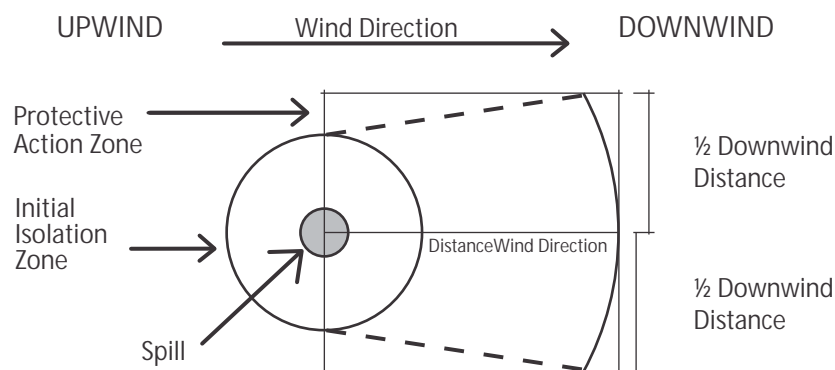

NOTE 1: See "Introduction To Green Tables – Initial Isolation And Protective Action Distances" under "Factors That May Change the Protective Action Distances" (page 285)

NOTE 2: See Table 2 – Water-Reactive Materials which Produce Toxic Gases for the list of gases produced when these materials are spilled in water.

Call the emergency response telephone number listed on the shipping paper or the appropriate response agency as soon as possible for additional information on the material, safety precautions and mitigation procedures.



TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

		SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)					
ID	No.	Guide	NAME OF MATERIAL	ISOLATE First in all Directions		PROTECT Then persons Downwind during-		ISOLATE First in all Directions		PROTECT Then persons Downwind during-	
				Meters (Feet)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	Meters (Feet)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)		
				30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		150 m (500 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)	
	1005 *	125	Ammonia, anhydrous								
	1005 *	125	Anhydrous ammonia								
	1008	125	Boron trifluoride	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.4 mi)		300 m (1000 ft)	1.7 km (1.1 mi)	4.8 km (3.0 mi)	
	1008	125	Boron trifluoride, compressed								
	1016	119	Carbon monoxide	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		200 m (600 ft)	1.2 km (0.8 mi)	4.8 km (3.0 mi)	
	1016	119	Carbon monoxide, compressed								
	1017 *	124	Chlorine	60 m (200 ft)	0.4 km (0.2 mi)	1.5 km (1.0 mi)		500 m (1500 ft)	3.0 km (1.9 mi)	7.9 km (4.9 mi)	
	1023	119	Coal gas	60 m (200 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)		100 m (300 ft)	0.4 km (0.2 mi)	0.5 km (0.3 mi)	
	1023	119	Coal gas, compressed								
	1026	119	Cyanogen	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)		60 m (200 ft)	0.4 km (0.2 mi)	1.7 km (1.0 mi)	
	1026	119	Cyanogen gas								
	1040 *	119P	Ethylene oxide	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		150 m (500 ft)	0.9 km (0.5 mi)	2.0 km (1.3 mi)	
	1040 *	119P	Ethylene oxide with Nitrogen								
	1045	124	Fluorine	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		100 m (300 ft)	0.5 km (0.3 mi)	2.3 km (1.4 mi)	
	1045	124	Fluorine, compressed								
	1048	125	Hydrogen bromide, anhydrous	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		200 m (600 ft)	1.2 km (0.8 mi)	3.9 km (2.4 mi)	
	1050 *	125	Hydrogen chloride, anhydrous	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		60 m (200 ft)	0.3 km (0.2 mi)	1.3 km (0.8 mi)	
	1051	117	AC (when used as a weapon)	60 m (200 ft)	0.3 km (0.2 mi)	1.0 km (0.6 mi)		1000 m (3000 ft)	3.7 km (2.3 mi)	8.4 km (5.3 mi)	
	1051	117	Hydrocyanic acid, aqueous solutions, with more than 20% Hydrogen cyanide	60 m (200 ft)	0.2 km (0.1 mi)	0.6 km (0.4 mi)		400 m (1250 ft)	1.4 km (0.9 mi)	3.8 km (2.4 mi)	
	1051	117	Hydrogen cyanide, anhydrous, stabilized								
	1051	117	Hydrogen cyanide, stabilized								
	1052 *	125	Hydrogen fluoride, anhydrous	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)		300 m (1000 ft)	1.5 km (0.9 mi)	3.2 km (2.0 mi)	
	1053	117	Hydrogen sulfide	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.3 mi)		300 m (1000 ft)	1.7 km (1.0 mi)	5.6 km (3.5 mi)	
	1053	117	Hydrogen sulphide								
	1062	123	Methyl bromide	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)		100 m (300 ft)	0.6 km (0.4 mi)	1.9 km (1.2 mi)	
	1064	117	Methyl mercaptan	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		150 m (500 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)	
	1067	124	Dinitrogen tetroxide	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.2 mi)		300 m (1000 ft)	1.1 km (0.7 mi)	2.7 km (1.7 mi)	
	1067	124	Nitrogen dioxide								
	1069	125	Nitrosyl chloride	30 m (100 ft)	0.2 km (0.2 mi)	1.1 km (0.7 mi)		600 m (2000 ft)	3.6 km (2.3 mi)	9.5 km (5.9 mi)	
	1071	119	Oil gas	60 m (200 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)		100 m (300 ft)	0.4 km (0.2 mi)	0.5 km (0.3 mi)	
	1071	119	Oil gas, compressed								
	1076	125	CG (when used as a weapon)	150 m (500 ft)	0.8 km (0.5 mi)	3.2 km (2.0 mi)		1000 m (3000 ft)	7.5 km (4.7 mi)	11.0+ km (7.0+ mi)	
	1076	125	Diphosgene	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)		30 m (100 ft)	0.3 km (0.2 mi)	0.5 km (0.3 mi)	
	1076	125	DP (when used as a weapon)	30 m (100 ft)	0.2 km (0.1 mi)	0.7 km (0.4 mi)		200 m (600 ft)	1.0 km (0.7 mi)	2.4 km (1.5 mi)	
	1076	125	Phosgene	100 m (300 ft)	0.6 km (0.4 mi)	2.7 km (1.7 mi)		500 m (1500 ft)	3.1 km (1.9 mi)	10.8 km (6.7 mi)	
	1079 *	125	Sulfur dioxide	100 m (300 ft)	0.7 km (0.4 mi)	2.8 km (1.7 mi)		1000 m (3000 ft)	5.6 km (3.5 mi)	11.0+ km (7.0+ mi)	
	1079 *	125	Sulphur dioxide								
	1082	119P	Trifluorochloroethylene, stabilized	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.4 km (0.3 mi)	0.9 km (0.6 mi)	
	1092	131P	Acrolein, stabilized	150 m (500 ft)	1.4 km (0.9 mi)	4.0 km (2.5 mi)		800 m (2500 ft)	9.3 km (5.8 mi)	11.0+ km (7.0+ mi)	
	1098	131	Allyl alcohol	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		60 m (200 ft)	0.3 km (0.2 mi)	0.5 km (0.3 mi)	

"+" means distance can be larger in certain atmospheric conditions \* PLEASE ALSO CONSULT TABLE 3 FOR THIS MATERIAL

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No.      Guide      NAME OF MATERIAL			SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
			ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
					DAY	NIGHT			DAY	NIGHT
			Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)		Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	
1135	131	Ethylene chlorohydrin	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		60 m (200 ft)	0.3 km (0.2 mi)	0.4 km (0.3 mi)	
1143	131P	Crotonaldehyde	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	1.0 km (0.6 mi)	
1143	131P	Crotonaldehyde, stabilized	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.6 km (0.4 mi)	1.9 km (1.2 mi)	
1162	155	Dimethyldichlorosilane (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.5 km (0.4 mi)		100 m (300 ft)	1.1 km (0.7 mi)	2.2 km (1.4 mi)	
1163	131	1,1-Dimethylhydrazine	30 m (100 ft)	0.2 km (0.1 mi)	0.5 km (0.4 mi)		100 m (300 ft)	0.4 km (0.2 mi)	0.6 km (0.4 mi)	
1163	131	Dimethylhydrazine, unsymmetrical	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		60 m (200 ft)	0.7 km (0.5 mi)	2.2 km (1.4 mi)	
1182	155	Ethyl chloroformate	30 m (100 ft)	0.2 km (0.1 mi)	0.5 km (0.3 mi)		100 m (300 ft)	1.0 km (0.6 mi)	2.0 km (1.3 mi)	
1183	139	Ethylidichlorosilane (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.7 km (0.5 mi)		200 m (600 ft)	2.1 km (1.3 mi)	6.3 km (3.9 mi)	
1185	131P	Ethylenimine, stabilized	30 m (100 ft)	0.2 km (0.1 mi)	0.6 km (0.4 mi)		150 m (500 ft)	1.1 km (0.7 mi)	2.3 km (1.4 mi)	
1196	155	Ethyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)		200 m (600 ft)	2.2 km (1.4 mi)	4.6 km (2.9 mi)	
1238	155	Methyl chloroformate	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		60 m (200 ft)	0.8 km (0.5 mi)	2.5 km (1.6 mi)	
1239	131	Methyl chloromethyl ether	30 m (100 ft)	0.3 km (0.2 mi)	0.6 km (0.4 mi)		100 m (300 ft)	1.4 km (0.9 mi)	2.3 km (1.4 mi)	
1242	139	Methyldichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		100 m (300 ft)	0.9 km (0.6 mi)	2.6 km (1.7 mi)	
1244	131	Methylhydrazine	30 m (100 ft)	0.3 km (0.2 mi)	0.8 km (0.5 mi)		800 m (2500 ft)	1.5 km (1.0 mi)	3.0 km (1.9 mi)	
1250	155	Methyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		1000 m (3000 ft)	11.0+ km (7.0+ mi)	11.0+ km (7.0+ mi)	
1251	131P	Methyl vinyl ketone, stabilized	100 m (300 ft)	0.3 km (0.2 mi)	0.8 km (0.5 mi)		800 m (2500 ft)	1.5 km (1.0 mi)	3.0 km (1.9 mi)	
1259	131	Nickel carbonyl	100 m (300 ft)	1.4 km (0.9 mi)	5.4 km (3.4 mi)		1000 m (3000 ft)	11.0+ km (7.0+ mi)	11.0+ km (7.0+ mi)	
1295	139	Trichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		60 m (200 ft)	0.7 km (0.4 mi)	2.2 km (1.4 mi)	
1298	155	Trimethylchlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.6 km (0.4 mi)	1.6 km (1.0 mi)	
1305	155P	Vinyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.6 km (0.4 mi)	2.0 km (1.3 mi)	
1305	155P	Vinyltrichlorosilane, stabilized (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.4 km (0.2 mi)	1.4 km (0.9 mi)	
1340	139	Phosphorus pentasulfide, free from yellow and white Phosphorus (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	1.1 km (0.7 mi)	3.8 km (2.4 mi)	
1340	139	Phosphorus pentasulfide, free from yellow and white Phosphorus (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.7 km (0.4 mi)		300 m (1000 ft)	2.7 km (1.7 mi)	8.2 km (5.1 mi)	
1360	139	Calcium phosphide (when spilled in water)	30 m (100 ft)	0.6 km (0.4 mi)	2.0 km (1.2 mi)		200 m (600 ft)	0.8 km (0.5 mi)	2.7 km (1.7 mi)	
1380	135	Pentaborane	60 m (200 ft)	0.2 km (0.1 mi)	0.6 km (0.4 mi)		60 m (200 ft)			
1384	135	Sodium dithionite (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.9 km (0.6 mi)		500 m (1500 ft)	2.1 km (1.3 mi)	7.5 km (4.7 mi)	
1384	135	Sodium hydrosulfite (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.9 km (0.6 mi)		500 m (1500 ft)	2.1 km (1.3 mi)	7.5 km (4.7 mi)	
1384	135	Sodium hydrosulphite (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.9 km (0.6 mi)		500 m (1500 ft)	2.1 km (1.3 mi)	7.5 km (4.7 mi)	

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		NAME OF MATERIAL		SMALL SPILLS				LARGE SPILLS			
				(From a small package or small leak from a large package)				(From a large package or from many small packages)			
				ISOLATE in all Directions		PROTECT persons Downwind during- DAY NIGHT		ISOLATE in all Directions		PROTECT persons Downwind during- DAY NIGHT	
		Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)			Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	
1419	139	Magnesium aluminum phosphide (when spilled in water)	60 m (200 ft)	0.2 km (0.1 mi)	0.9 km (0.5 mi)	500 m (1500 ft)	1.9 km (1.2 mi)	6.5 km (4.1 mi)			
1432	139	Sodium phosphide (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.6 km (0.4 mi)	400 m (1250 ft)	1.4 km (0.9 mi)	4.2 km (2.6 mi)			
1510	143	Tetranitromethane	30 m (100 ft)	0.2 km (0.2 mi)	0.4 km (0.2 mi)	60 m (200 ft)	0.5 km (0.4 mi)	1.0 km (0.6 mi)			
1541	155	Acetone cyanohydrin, stabilized (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	100 m (300 ft)	0.3 km (0.2 mi)	1.0 km (0.7 mi)			
1556	152	MD (when used as a weapon)	300 m (1000 ft)	1.6 km (1.0 mi)	4.3 km (2.7 mi)	1000 m (3000 ft)	11.0+ km (7.0+ mi)	11.0+ km (7.0+ mi)			
1556	152	Methyldichlorarsine	100 m (300 ft)	1.4 km (0.9 mi)	2.2 km (1.4 mi)	300 m (1000 ft)	3.8 km (2.4 mi)	6.9 km (4.3 mi)			
1556	152	PD (when used as a weapon)	60 m (200 ft)	0.4 km (0.3 mi)	0.4 km (0.3 mi)	300 m (1000 ft)	1.6 km (1.0 mi)	1.6 km (1.0 mi)			
1560	157	Arsenic chloride	30 m (100 ft)	0.2 km (0.1 mi)	0.3 km (0.2 mi)	100 m (300 ft)	1.0 km (0.6 mi)	1.6 km (1.0 mi)			
1560	157	Arsenic trichloride									
1569	131	Bromoacetone	30 m (100 ft)	0.4 km (0.3 mi)	1.2 km (0.8 mi)	150 m (500 ft)	1.9 km (1.2 mi)	3.6 km (2.3 mi)			
1580	154	Chloropicrin	30 m (100 ft)	0.4 km (0.3 mi)	1.0 km (0.6 mi)	150 m (500 ft)	1.6 km (1.0 mi)	3.1 km (1.9 mi)			
1581	123	Chloropicrin and Methyl bromide mixture	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	300 m (1000 ft)	2.1 km (1.3 mi)	5.9 km (3.7 mi)			
1581	123	Methyl bromide and Chloropicrin mixture									
1582	119	Chloropicrin and Methyl chloride mixture	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.3 mi)	60 m (200 ft)	0.4 km (0.2 mi)	1.7 km (1.1 mi)			
1582	119	Methyl chloride and Chloropicrin mixture									
1583	154	Chloropicrin mixture, n.o.s.	30 m (100 ft)	0.4 km (0.3 mi)	1.0 km (0.6 mi)	150 m (500 ft)	1.6 km (1.0 mi)	3.1 km (1.9 mi)			
1589	125	CK (when used as a weapon)	150 m (500 ft)	1.0 km (0.6 mi)	3.8 km (2.4 mi)	800 m (2500 ft)	5.7 km (3.6 mi)	11.0+ km (7.0+ mi)			
1589	125	Cyanogen chloride, stabilized	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	400 m (1250 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)			
1595	156	Dimethyl sulfate	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.8 km (0.5 mi)			
1595	156	Dimethyl sulphate									
1605	154	Ethylene dibromide	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)			
1612	123	Hexaethyl tetraphosphate and compressed gas mixture	100 m (300 ft)	0.8 km (0.5 mi)	2.7 km (1.7 mi)	400 m (1250 ft)	3.5 km (2.2 mi)	8.1 km (5.1 mi)			
1613	154	Hydrocyanic acid, aqueous solution, with not more than 20% Hydrogen cyanide	60 m (200 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.5 km (0.3 mi)	1.3 km (0.8 mi)			
1613	154	Hydrogen cyanide									
1614	152	Hydrogen cyanide, stabilized (absorbed)	60 m (200 ft)	0.2 km (0.1 mi)	0.7 km (0.4 mi)	150 m (500 ft)	0.5 km (0.4 mi)	1.7 km (1.1 mi)			
1647	151	Ethylene dibromide and Methyl bromide mixture, liquid	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)	100 m (300 ft)	0.6 km (0.4 mi)	1.9 km (1.2 mi)			
1647	151	Methyl bromide and Ethylene dibromide mixture, liquid									
1660	124	Nitric oxide	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	100 m (300 ft)	0.6 km (0.4 mi)	2.3 km (1.5 mi)			
1660	124	Nitric oxide, compressed									
1670	157	Perchloromethyl mercaptan	30 m (100 ft)	0.2 km (0.2 mi)	0.4 km (0.2 mi)	100 m (300 ft)	0.7 km (0.5 mi)	1.3 km (0.8 mi)			

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No.		SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
		ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
		Meters (Feet)	DAY Kilometers (Miles)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	Meters (Feet)	DAY Kilometers (Miles)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)
1680	157	Potassium cyanide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	100 m (300 ft)	0.3 km (0.2 mi)	0.3 km (0.2 mi)	1.2 km (0.8 mi)
1680	157	Potassium cyanide, solid (when spilled in water)							
1689	157	Sodium cyanide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	100 m (300 ft)	0.4 km (0.2 mi)	0.4 km (0.2 mi)	1.4 km (0.9 mi)
1689	157	Sodium cyanide, solid (when spilled in water)							
1694	159	CA (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.3 mi)	100 m (300 ft)	0.5 km (0.4 mi)	0.5 km (0.4 mi)	2.6 km (1.6 mi)
1695	131	Chloroacetone, stabilized	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.4 km (0.3 mi)	0.4 km (0.3 mi)	0.8 km (0.5 mi)
1697	153	CN (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.3 km (0.2 mi)	0.3 km (0.2 mi)	1.2 km (0.8 mi)
1698	154	Adamsite (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.3 km (0.2 mi)	0.3 km (0.2 mi)	1.4 km (0.9 mi)
1698	154	DM (when used as a weapon)							
1699	151	DA (when used as a weapon)	30 m (100 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	300 m (1000 ft)	1.9 km (1.2 mi)	1.9 km (1.2 mi)	7.5 km (4.7 mi)
1716	156	Acetyl bromide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.5 km (0.3 mi)	1.3 km (0.8 mi)
1717	155	Acetyl chloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	100 m (300 ft)	1.0 km (0.6 mi)	1.0 km (0.6 mi)	2.8 km (1.7 mi)
1722	155	Allyl chlorocarbonate	100 m (300 ft)	0.4 km (0.2 mi)	0.9 km (0.6 mi)	400 m (1250 ft)	1.5 km (1.0 mi)	1.5 km (1.0 mi)	3.0 km (1.9 mi)
1722	155	Allyl chloroformate							
1724	155	Allyltrichlorosilane, stabilized (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)	60 m (200 ft)	0.6 km (0.4 mi)	0.6 km (0.4 mi)	1.9 km (1.2 mi)
1725	137	Aluminum bromide, anhydrous (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	0.6 km (0.4 mi)
1726	137	Aluminum chloride, anhydrous (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.6 km (0.4 mi)	0.6 km (0.4 mi)	2.2 km (1.4 mi)
1728	155	Anyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)	60 m (200 ft)	0.6 km (0.4 mi)	0.6 km (0.4 mi)	1.9 km (1.2 mi)
1732	157	Antimony pentafluoride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)	150 m (500 ft)	1.2 km (0.7 mi)	1.2 km (0.7 mi)	4.2 km (2.6 mi)
1741	125	Boron trichloride (when spilled on land)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	100 m (300 ft)	0.6 km (0.4 mi)	0.6 km (0.4 mi)	1.4 km (0.9 mi)
1741	125	Boron trichloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)	100 m (300 ft)	1.3 km (0.8 mi)	1.3 km (0.8 mi)	3.8 km (2.4 mi)
1744	154	Bromine	60 m (200 ft)	0.6 km (0.4 mi)	1.9 km (1.2 mi)	300 m (1000 ft)	2.8 km (1.8 mi)	2.8 km (1.8 mi)	6.5 km (4.0 mi)
1744	154	Bromine, solution							
1744	154	Bromine, solution (Inhalation Hazard Zone A)							
1744	154	Bromine, solution (Inhalation Hazard Zone B)	60 m (200 ft)	0.5 km (0.3 mi)	1.3 km (0.8 mi)	150 m (500 ft)	1.8 km (1.1 mi)	1.8 km (1.1 mi)	4.2 km (2.6 mi)
1745	144	Bromine pentafluoride (when spilled on land)	30 m (100 ft)	0.4 km (0.2 mi)	1.4 km (0.9 mi)	200 m (600 ft)	2.3 km (1.4 mi)	2.3 km (1.4 mi)	5.1 km (3.2 mi)
1745	144	Bromine pentafluoride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	150 m (500 ft)	1.2 km (0.8 mi)	1.2 km (0.8 mi)	4.4 km (2.7 mi)
1746	144	Bromine trifluoride (when spilled on land)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi)	0.3 km (0.2 mi)	0.5 km (0.4 mi)
1746	144	Bromine trifluoride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)	100 m (300 ft)	1.1 km (0.7 mi)	1.1 km (0.7 mi)	4.1 km (2.5 mi)

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No.		Guide	NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
				ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
						DAY	NIGHT			DAY	NIGHT
				Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)		
1747	155	Butyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)	60 m (200 ft)	0.6 km (0.4 mi)	1.8 km (1.1 mi)			
1749	124	Chlorine trifluoride	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)			
1752	156	Chloroacetyl chloride (when spilled on land)	30 m (100 ft)	0.3 km (0.2 mi)	0.6 km (0.4 mi)	100 m (300 ft)	1.2 km (0.8 mi)	2.3 km (1.4 mi)			
1752	156	Chloroacetyl chloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi)	0.9 km (0.6 mi)			
1753	156	Chlorophenyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi)	1.0 km (0.7 mi)			
1754	137	Chlorosulfonic acid (when spilled on land)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi)	0.4 km (0.2 mi)			
1754	137	Chlorosulfonic acid (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.7 km (0.5 mi)	2.5 km (1.5 mi)			
1754	137	Chlorosulfonic acid and Sulfur trioxide mixture (when spilled in water)	100 m (300 ft)	0.4 km (0.2 mi)	0.9 km (0.5 mi)	400 m (1250 ft)	2.9 km (1.8 mi)	5.7 km (3.5 mi)			
1754	137	Chlorosulfonic acid and Sulfur trioxide mixture (when spilled on land)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.7 km (0.5 mi)	2.5 km (1.5 mi)			
1754	137	Chlorosulphonic acid (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.7 km (0.5 mi)	2.5 km (1.5 mi)			
1754	137	Chlorosulphonic acid and Sulphur trioxide mixture (when spilled on land)	100 m (300 ft)	0.4 km (0.2 mi)	0.9 km (0.5 mi)	400 m (1250 ft)	2.9 km (1.8 mi)	5.7 km (3.5 mi)			
1754	137	Chlorosulphonic acid and Sulphur trioxide mixture (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.7 km (0.5 mi)	2.5 km (1.5 mi)			
1754	137	Sulfur trioxide and Chlorosulfonic acid mixture (when spilled on land)	100 m (300 ft)	0.4 km (0.2 mi)	0.9 km (0.5 mi)	400 m (1250 ft)	2.9 km (1.8 mi)	5.7 km (3.5 mi)			
1754	137	Sulfur trioxide and Chlorosulfonic acid mixture (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.7 km (0.5 mi)	2.5 km (1.5 mi)			
1758	137	Chromium oxychloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.2 mi)	0.8 km (0.5 mi)			
1762	156	Cyclohexenyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	1.4 km (0.9 mi)			
1763	156	Cyclohexyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	1.4 km (0.9 mi)			

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

		SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
ID No.	Guide NAME OF MATERIAL	ISOLATE in all Directions First		PROTECT persons Downwind during- Then		ISOLATE in all Directions First		PROTECT persons Downwind during- Then	
		Meters (Feet)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)		Meters (Feet)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	
1765	156 Dichloroacetyl chloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.3 km (0.2 mi)	1.0 km (0.6 mi)	
1766	156 Dichlorophenyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)		60 m (200 ft)	0.6 km (0.4 mi)	2.1 km (1.3 mi)	
1767	155 Diethylchlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.4 km (0.3 mi)	1.1 km (0.7 mi)	
1769	156 Diphenyldichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		30 m (100 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	
1771	156 Dodecyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	1.4 km (0.9 mi)	
1777	137 Fluorosulfonic acid (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.2 km (0.2 mi)	0.8 km (0.5 mi)	
1777	137 Fluorosulphonic acid (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.2 km (0.2 mi)	0.8 km (0.5 mi)	
1781	156 Hexadecyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.2 km (0.2 mi)	0.7 km (0.4 mi)	
1784	156 Hexyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	1.5 km (0.9 mi)	
1799	156 Nonyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	1.6 km (1.0 mi)	
1800	156 Octadecyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	1.5 km (1.0 mi)	
1801	156 Octyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	1.6 km (1.0 mi)	
1804	156 Phenyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	1.5 km (1.0 mi)	
1806	137 Phosphorus pentachloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)		30 m (100 ft)	0.4 km (0.3 mi)	1.5 km (0.9 mi)	
1808	137 Phosphorus tribromide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.2 mi)		60 m (200 ft)	0.6 km (0.4 mi)	2.0 km (1.2 mi)	
1809	137 Phosphorus trichloride (when spilled on land)	30 m (100 ft)	0.2 km (0.1 mi)	0.5 km (0.3 mi)		100 m (300 ft)	1.0 km (0.6 mi)	2.2 km (1.4 mi)	
1809	137 Phosphorus trichloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		60 m (200 ft)	0.8 km (0.5 mi)	2.5 km (1.6 mi)	
1810	137 Phosphorus oxychloride (when spilled on land)	30 m (100 ft)	0.3 km (0.2 mi)	0.7 km (0.4 mi)		100 m (300 ft)	1.2 km (0.7 mi)	2.2 km (1.4 mi)	
1810	137 Phosphorus oxychloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		60 m (200 ft)	0.7 km (0.4 mi)	2.3 km (1.4 mi)	
1815	132 Propionyl chloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.3 km (0.2 mi)	0.8 km (0.5 mi)	
1816	155 Propyltrichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		60 m (200 ft)	0.6 km (0.4 mi)	2.0 km (1.3 mi)	
1818	157 Silicon tetrachloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)		100 m (300 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)	
1828	137 Sulfur chlorides (when spilled on land)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		60 m (200 ft)	0.3 km (0.2 mi)	0.5 km (0.3 mi)	
1828	137 Sulfur chlorides (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		30 m (100 ft)	0.4 km (0.2 mi)	1.2 km (0.8 mi)	
1828	137 Sulphur chlorides (when spilled on land)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		60 m (200 ft)	0.3 km (0.2 mi)	0.5 km (0.3 mi)	

"+" means distance can be larger in certain atmospheric conditions



TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No.		NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)			LARGE SPILLS (From a large package or from many small packages)		
			ISOLATE in all Directions Meters (Feet)	PROTECT persons Downwind during-		ISOLATE in all Directions Meters (Feet)	PROTECT persons Downwind during-	
				DAY Kilometers (Miles)	NIGHT Kilometers (Miles)		DAY Kilometers (Miles)	NIGHT Kilometers (Miles)
1828	137	Sulphur chlorides (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.2 mi)	1.2 km (0.8 mi)
1829	137	Sulfur trioxide, stabilized	100 m (300 ft)	0.4 km (0.2 mi)	0.9 km (0.5 mi)	400 m (1250 ft)	2.9 km (1.8 mi)	5.7 km (3.5 mi)
1831	137	Sulphur trioxide, stabilized	100 m (300 ft)	0.4 km (0.2 mi)	0.9 km (0.5 mi)	400 m (1250 ft)	2.9 km (1.8 mi)	5.7 km (3.5 mi)
1831	137	Sulfuric acid, fuming with not less than 30% free Sulfur trioxide						
1831	137	Sulphuric acid, fuming						
1831	137	Sulphuric acid, fuming, with not less than 30% free Sulphur trioxide						
1834	137	Sulfuryl chloride (when spilled on land)	30 m (100 ft)	0.2 km (0.1 mi)	0.5 km (0.4 mi)	100 m (300 ft)	0.9 km (0.6 mi)	2.0 km (1.3 mi)
1834	137	Sulfuryl chloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.8 km (1.1 mi)
1834	137	Sulphuryl chloride (when spilled on land)	30 m (100 ft)	0.2 km (0.1 mi)	0.5 km (0.4 mi)	100 m (300 ft)	0.9 km (0.6 mi)	2.0 km (1.3 mi)
1834	137	Sulphuryl chloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.8 km (1.1 mi)
1836	137	Thionyl chloride (when spilled on land)	30 m (100 ft)	0.2 km (0.2 mi)	0.7 km (0.5 mi)	100 m (300 ft)	0.9 km (0.6 mi)	1.9 km (1.2 mi)
1836	137	Thionyl chloride (when spilled in water)	100 m (300 ft)	1.1 km (0.7 mi)	3.0 km (1.9 mi)	800 m (2500 ft)	9.9 km (6.2 mi)	11.0+ km (7.0+ mi)
1838	137	Titanium tetrachloride (when spilled on land)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	0.7 km (0.4 mi)
1838	137	Titanium tetrachloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.8 km (1.1 mi)
1859	157	Silicon tetrafluoride	30 m (100 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	100 m (300 ft)	0.6 km (0.4 mi)	2.5 km (1.6 mi)
1859	157	Silicon tetrafluoride, compressed						
1892	151	ED (when used as a weapon)	150 m (500 ft)	2.0 km (1.2 mi)	2.9 km (1.8 mi)	1000 m (3000 ft)	10.4 km (6.5 mi)	11.0+ km (7.0+ mi)
1892	151	Ethylchloroarsine	150 m (500 ft)	1.5 km (1.0 mi)	2.4 km (1.5 mi)	500 m (1500 ft)	5.2 km (3.3 mi)	10.2 km (6.1 mi)
1898	156	Acetyl iodide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.1 km (0.7 mi)
1911	119	Diborane	60 m (200 ft)	0.3 km (0.2 mi)	1.0 km (0.7 mi)	200 m (600 ft)	1.3 km (0.8 mi)	3.9 km (2.5 mi)
1911	119	Diborane, compressed	30 m (100 ft)	0.2 km (0.1 mi)	0.7 km (0.4 mi)	60 m (200 ft)	0.8 km (0.5 mi)	2.8 km (1.7 mi)
1923	135	Calcium dithionite (when spilled in water)						
1923	135	Calcium hydrosulfite (when spilled in water)						
1923	135	Calcium hydrosulphite (when spilled in water)						
1929	135	Potassium dithionite (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.6 km (0.4 mi)	60 m (200 ft)	0.7 km (0.4 mi)	2.5 km (1.5 mi)
1929	135	Potassium hydrosulfite (when spilled in water)						
1929	135	Potassium hydrosulphite (when spilled in water)						

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
			ISOLATE in all Directions		Then PROTECT		ISOLATE in all Directions		Then PROTECT	
					persons Downwind during- DAY	NIGHT			persons Downwind during- DAY	NIGHT
			Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)
1931	171	Zinc dithionite (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.6 km (0.4 mi)	60 m (200 ft)	0.7 km (0.5 mi)	2.5 km (1.6 mi)		
1931	171	Zinc hydrosulfite (when spilled in water)								
1931	171	Zinc hydrosulphite (when spilled in water)								
1953	119	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)		
1953	119	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	3.5 km (2.2 mi)		
1953	119	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)		
1953	119	Compressed gas, flammable, poisonous, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
1953	119	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)		
1953	119	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	3.5 km (2.2 mi)		
1953	119	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)		
1953	119	Compressed gas, flammable, toxic, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
1953	119	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)		
1953	119	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	3.5 km (2.2 mi)		
1953	119	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)		
1953	119	Compressed gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)		
1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	3.5 km (2.2 mi)		
1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)		
1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		

"+" means distance can be larger in certain atmospheric conditions

### TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No.		Guide	NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
				ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
						DAY	NIGHT			DAY	NIGHT
				Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)		
1953	119	Compressed gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)			
1955	123	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone D)	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)			
1955	123	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone A)									
1955	123	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)			
1955	123	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)			
1955	123	Compressed gas, poisonous, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)			
1955	123	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)			
1955	123	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)			
1955	123	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)			
1955	123	Compressed gas, toxic, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)			
1955	123	Organic phosphate compound mixed with compressed gas	100 m (300 ft)	0.9 km (0.6 mi)	2.6 km (1.6 mi)	500 m (1500 ft)	3.9 km (2.4 mi)	9.4 km (5.9 mi)			
1955	123	Organic phosphate mixed with compressed gas									
1955	123	Organic phosphorus compound mixed with compressed gas									
1967	123	Insecticide gas, poisonous, n.o.s. (Inhalation Hazard Zone D)	100 m (300 ft)	0.9 km (0.6 mi)	2.6 km (1.6 mi)	500 m (1500 ft)	3.9 km (2.4 mi)	9.4 km (5.9 mi)			
1967	123	Insecticide gas, toxic, n.o.s.									
1967	123	Parathion and compressed gas mixture	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	100 m (300 ft)	0.6 km (0.4 mi)	2.3 km (1.5 mi)			
1975	124	Dinitrogen tetroxide and Nitric oxide mixture									
1975	124	Nitric oxide and Dinitrogen tetroxide mixture									
1975	124	Nitric oxide and Nitrogen dioxide mixture									
1975	124	Nitric oxide and Nitrogen tetroxide mixture									
1975	124	Nitrogen dioxide and Nitric oxide mixture									
1975	124	Nitrogen tetroxide and Nitric oxide mixture									
1994	131	Iron pentacarbonyl	100 m (300 ft)	0.9 km (0.6 mi)	2.1 km (1.3 mi)	400 m (1250 ft)	4.8 km (3.0 mi)	8.3 km (5.2 mi)			
2004	135	Magnesium diamide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)	100 m (300 ft)	0.7 km (0.5 mi)	2.4 km (1.5 mi)			
2011	139	Magnesium phosphide (when spilled in water)	60 m (200 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	500 m (1500 ft)	1.8 km (1.1 mi)	6.0 km (3.8 mi)			

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No.		SMALL SPILLS (From a small package or small leak from a large package)			LARGE SPILLS (From a large package or from many small packages)		
		ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions	
		Meters (Feet)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	DAY Kilometers (Miles)	Meters (Feet)	Then NIGHT Kilometers (Miles)
2012	139	Potassium phosphide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	300 m (1000 ft)	1.2 km (0.8 mi) 4.0 km (2.5 mi)
2013	139	Strontium phosphide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	300 m (1000 ft)	1.2 km (0.7 mi) 3.8 km (2.4 mi)
2032	157	Nitric acid, fuming	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.5 km (0.3 mi) 1.1 km (0.7 mi)
2032	157	Nitric acid, red fuming	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	2.0 km (1.3 mi) 7.6 km (4.7 mi)
2186*	125	Hydrogen chloride, refrigerated liquid	150 m (500 ft)	1.0 km (0.6 mi)	4.0 km (2.5 mi)	1000 m (3000 ft)	5.8 km (3.6 mi) 11.0+ km (7.0+ mi)
2188	119	Arsine	300 m (1000 ft)	1.9 km (1.2 mi)	5.7 km (3.6 mi)	1000 m (3000 ft)	8.9 km (5.6 mi) 11.0+ km (7.0+ mi)
2188	119	SA (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.2 mi)	200 m (600 ft)	1.2 km (0.8 mi) 2.9 km (1.8 mi)
2189	119	Dichlorosilane	200 m (600 ft)	0.4 km (0.3 mi)	2.1 km (1.3 mi)	1000 m (3000 ft)	2.2 km (1.4 mi) 8.6 km (5.4 mi)
2190	124	Oxygen difluoride	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)	300 m (1000 ft)	1.9 km (1.2 mi) 5.1 km (3.2 mi)
2190	124	Oxygen difluoride, compressed	150 m (500 ft)	0.8 km (0.5 mi)	3.2 km (2.0 mi)	800 m (2500 ft)	4.4 km (2.7 mi) 10.6 km (6.6 mi)
2191	123	Sulfuryl fluoride	200 m (600 ft)	1.1 km (0.7 mi)	3.7 km (2.3 mi)	800 m (2500 ft)	5.0 km (3.1 mi) 11.0+ km (7.0+ mi)
2191	123	Sulphuryl fluoride	200 m (600 ft)	1.2 km (0.7 mi)	4.4 km (2.8 mi)	1000 m (3000 ft)	6.7 km (4.2 mi) 11.0+ km (7.0+ mi)
2192	119	Germane	30 m (100 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	150 m (500 ft)	0.9 km (0.6 mi) 3.1 km (2.0 mi)
2194	125	Selenium hexafluoride	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi) 2.8 km (1.7 mi)
2195	125	Tellurium hexafluoride					
2196	125	Tungsten hexafluoride					
2197	125	Hydrogen iodide, anhydrous					
2198	125	Phosphorus pentafluoride	30 m (100 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	150 m (500 ft)	0.9 km (0.5 mi) 3.3 km (2.0 mi)
2198	125	Phosphorus pentafluoride, compressed	60 m (200 ft)	0.2 km (0.2 mi)	1.0 km (0.7 mi)	400 m (1250 ft)	1.3 km (0.8 mi) 4.1 km (2.5 mi)
2199	119	Phosphine	200 m (600 ft)	1.1 km (0.7 mi)	4.9 km (3.1 mi)	1000 m (3000 ft)	8.5 km (5.3 mi) 11.0+ km (7.0+ mi)
2202	117	Hydrogen selenide, anhydrous	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	1.3 km (0.8 mi) 3.5 km (2.2 mi)
2204	119	Carbonyl sulfide	30 m (100 ft)	0.2 km (0.1 mi)	0.4 km (0.2 mi)	60 m (200 ft)	0.7 km (0.5 mi) 1.3 km (0.8 mi)
2204	119	Carbonyl sulphide	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.3 mi)	300 m (1000 ft)	0.9 km (0.6 mi) 2.5 km (1.6 mi)
2232	153	Chloroacetaldehyde					
2232	153	2-Chloroethanol					
2308	157	Nitrosylsulfuric acid (when spilled in water)	30 m (100 ft)	0.2 km (0.1 mi)	0.6 km (0.4 mi)	150 m (500 ft)	1.5 km (0.9 mi) 2.8 km (1.7 mi)
2308	157	Nitrosylsulfuric acid, liquid (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi) 0.5 km (0.3 mi)
2308	157	Nitrosylsulfuric acid, solid (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.4 km (0.2 mi) 1.0 km (0.6 mi)
2308	157	Nitrosylsulphuric acid (when spilled in water)					
2308	157	Nitrosylsulphuric acid, liquid (when spilled in water)					
2308	157	Nitrosylsulphuric acid, solid (when spilled in water)					
2334	131	Allylamine	30 m (100 ft)	0.2 km (0.1 mi)	0.6 km (0.4 mi)	150 m (500 ft)	1.5 km (0.9 mi) 2.8 km (1.7 mi)
2337	131	Phenyl mercaptan	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi) 0.5 km (0.3 mi)
2353	132	Butylryl chloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.4 km (0.2 mi) 1.0 km (0.6 mi)
2382	131	1,2-Dimethylhydrazine	30 m (100 ft)	0.2 km (0.1 mi)	0.4 km (0.2 mi)	60 m (200 ft)	0.8 km (0.5 mi) 1.5 km (1.0 mi)
2382	131	Dimethylhydrazine, symmetrical					

"+" means distance can be larger in certain atmospheric conditions \* PLEASE ALSO CONSULT TABLE 3 FOR THIS MATERIAL

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No.		Guide	NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
				ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
						DAY	NIGHT			DAY	NIGHT
				Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)		
2395	132		Isobutryl chloride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.2 mi)	0.6 km (0.4 mi)		
2407	155		Isopropyl chloroformate	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.2 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.0 km (0.6 mi)		
2417	125	2417	Carbonyl fluoride	100 m (300 ft)	0.6 km (0.4 mi)	2.3 km (1.4 mi)	600 m (2000 ft)	3.7 km (2.3 mi)	8.0 km (5.0 mi)		
2417	125		Carbonyl fluoride, compressed								
2418	125		Sulfur tetrafluoride	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)		
2418	125		Sulphur tetrafluoride								
2420	125		Hexafluoroacetone	60 m (200 ft)	0.3 km (0.2 mi)	1.4 km (0.9 mi)	1000 m (3000 ft)	7.6 km (4.7 mi)	11.0+ km (7.0+ mi)		
2421	124		Nitrogen trioxide	60 m (200 ft)	0.4 km (0.3 mi)	1.8 km (1.1 mi)	300 m (1000 ft)	1.9 km (1.2 mi)	6.7 km (4.2 mi)		
2434	156		Dibenzylchlorosilane (when spilled in water)	30 m (100 ft) 0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft) 0.1 km (0.1 mi)	0.2 km (0.1 mi) 0.5 km (0.4 mi)				
2435	156		Ethylphenyldichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.4 km (0.2 mi)	1.1 km (0.7 mi)		
2437	156		Methylphenyldichlorosilane (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	1.4 km (0.9 mi)		
2438	132		Trimethylacetyl chloride	30 m (100 ft)	0.3 km (0.2 mi)	0.6 km (0.4 mi)	100 m (300 ft)	1.2 km (0.8 mi)	2.1 km (1.3 mi)		
2442	156		Trichloroacetyl chloride	30 m (100 ft)	0.2 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.6 km (0.4 mi)	1.2 km (0.8 mi)		
2474	157		Thiophosgene	60 m (200 ft)	0.7 km (0.4 mi)	2.0 km (1.2 mi)	300 m (1000 ft)	2.7 km (1.7 mi)	5.5 km (3.4 mi)		
2477	131		Methyl isothiocyanate	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.2 mi)	0.4 km (0.2 mi)		
2480	155		Methyl isocyanate	150 m (500 ft)	1.7 km (1.1 mi)	5.8 km (3.6 mi)	1000 m (3000 ft)	11.0+ km (7.0+ mi)	11.0+ km (7.0+ mi)		
2481	155		Ethyl isocyanate	150 m (500 ft)	1.8 km (1.2 mi)	5.9 km (3.7 mi)	1000 m (3000 ft)	11.0+ km (7.0+ mi)	11.0+ km (7.0+ mi)		
2482	155		n-Propyl isocyanate	100 m (300 ft)	1.1 km (0.7 mi)	2.8 km (1.7 mi)	600 m (2000 ft)	7.8 km (4.9 mi)	11.0+ km (7.0+ mi)		
2483	155		Isopropyl isocyanate	100 m (300 ft)	1.2 km (0.8 mi)	3.1 km (1.9 mi)	800 m (2500 ft)	10.1 km (6.3 mi)	11.0+ km (7.0+ mi)		
2484	155		tert-Butyl isocyanate	100 m (300 ft)	1.1 km (0.7 mi)	2.7 km (1.7 mi)	600 m (2000 ft)	7.2 km (4.5 mi)	11.0+ km (7.0+ mi)		
2485	155		n-Butyl isocyanate	60 m (200 ft)	0.8 km (0.5 mi)	1.7 km (1.1 mi)	300 m (1000 ft)	4.0 km (2.5 mi)	6.7 km (4.2 mi)		
2486	155		Isobutyl isocyanate	60 m (200 ft)	0.8 km (0.5 mi)	1.7 km (1.1 mi)	300 m (1000 ft)	4.0 km (2.5 mi)	6.5 km (4.1 mi)		
2487	155		Phenyl isocyanate	30 m (100 ft)	0.2 km (0.2 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.8 km (0.5 mi)	1.2 km (0.8 mi)		
2488	155		Cyclohexyl isocyanate	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
2495	144		Iodine pentafluoride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	150 m (500 ft)	1.2 km (0.8 mi)	4.6 km (2.9 mi)		
2521	131P		Diketene, stabilized	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi)	0.5 km (0.3 mi)		
2534	119		Methylchlorosilane	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	100 m (300 ft)	0.7 km (0.4 mi)	1.8 km (1.1 mi)		
2548	124		Chlorine pentafluoride	30 m (100 ft)	0.2 km (0.2 mi)	1.2 km (0.7 mi)	300 m (1000 ft)	1.8 km (1.1 mi)	7.3 km (4.6 mi)		
2600	119		Carbon monoxide and Hydrogen mixture, compressed	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	1.2 km (0.8 mi)	4.8 km (3.0 mi)		
2600	119		Hydrogen and Carbon monoxide mixture, compressed								
2605	155		Methoxymethyl isocyanate	30 m (100 ft)	0.4 km (0.2 mi)	0.5 km (0.4 mi)	100 m (300 ft)	1.2 km (0.8 mi)	1.8 km (1.2 mi)		
2606	155		Methyl orthosilicate	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.1 mi)	0.3 km (0.2 mi)		
2644	151		Methyl iodide	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	100 m (300 ft)	0.3 km (0.2 mi)	0.7 km (0.5 mi)		
2646	151		Hexachlorocyclopentadiene	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi)	0.4 km (0.3 mi)		
2668	131		Chloroacetonitrile	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		
2676	119		Stibine	60 m (200 ft)	0.4 km (0.2 mi)	1.7 km (1.1 mi)	300 m (1000 ft)	1.9 km (1.2 mi)	6.5 km (4.0 mi)		

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide NAME OF MATERIAL		SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
		ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
				DAY	NIGHT			DAY	NIGHT
		Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)		
2691	137 Phosphorus pentabromide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi)	1.0 km (0.6 mi)		
2692	157 Boron tribromide (when spilled on land)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	30 m (100 ft)	0.3 km (0.2 mi)	0.7 km (0.4 mi)		
2692	157 Boron tribromide (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.3 mi)	60 m (200 ft)	0.8 km (0.5 mi)	2.5 km (1.6 mi)		
2740	155 n-Propyl chloroformate	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.6 km (0.4 mi)	1.1 km (0.7 mi)		
2742	155 sec-Butyl chloroformate	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	0.6 km (0.4 mi)		
2742	155 Isobutyl chloroformate	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.3 km (0.2 mi)	0.5 km (0.3 mi)		
2743	155 n-Butyl chloroformate	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.2 mi)	0.5 km (0.4 mi)		
2806	138 Lithium nitride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)	60 m (200 ft)	0.6 km (0.4 mi)	2.1 km (1.3 mi)		
2810	153 Buzz (when used as a weapon)	60 m (200 ft)	0.4 km (0.2 mi)	1.7 km (1.1 mi)	400 m (1250 ft)	2.2 km (1.4 mi)	8.1 km (5.0 mi)		
2810	153 BZ (when used as a weapon)								
2810	153 CS (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	100 m (300 ft)	0.4 km (0.3 mi)	1.9 km (1.2 mi)		
2810	153 DC (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	60 m (200 ft)	0.4 km (0.3 mi)	1.8 km (1.1 mi)		
2810	153 GA (when used as a weapon)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	100 m (300 ft)	0.5 km (0.4 mi)	0.6 km (0.4 mi)		
2810	153 GB (when used as a weapon)	60 m (200 ft)	0.4 km (0.3 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.1 km (1.3 mi)	4.9 km (3.0 mi)		
2810	153 GD (when used as a weapon)	60 m (200 ft)	0.4 km (0.3 mi)	0.7 km (0.5 mi)	300 m (1000 ft)	1.8 km (1.1 mi)	2.7 km (1.7 mi)		
2810	153 GF (when used as a weapon)	30 m (100 ft)	0.2 km (0.2 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.8 km (0.5 mi)	1.0 km (0.6 mi)		
2810	153 H (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	60 m (200 ft)	0.3 km (0.2 mi)	0.4 km (0.3 mi)		
2810	153 HD (when used as a weapon)								
2810	153 HL (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	100 m (300 ft)	0.5 km (0.3 mi)	1.0 km (0.6 mi)		
2810	153 HN-1 (when used as a weapon)	60 m (200 ft)	0.3 km (0.2 mi)	0.5 km (0.3 mi)	200 m (600 ft)	1.1 km (0.7 mi)	1.8 km (1.1 mi)		
2810	153 HN-2 (when used as a weapon)	60 m (200 ft)	0.3 km (0.2 mi)	0.6 km (0.4 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	2.1 km (1.3 mi)		
2810	153 HN-3 (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	60 m (200 ft)	0.3 km (0.2 mi)	0.3 km (0.2 mi)		
2810	153 L (Lewisite) (when used as a weapon)								
2810	153 Lewisite (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	100 m (300 ft)	0.5 km (0.3 mi)	1.0 km (0.6 mi)		
2810	153 Mustard (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	60 m (200 ft)	0.3 km (0.2 mi)	0.4 km (0.3 mi)		
2810	153 Mustard Lewisite (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	100 m (300 ft)	0.5 km (0.3 mi)	1.0 km (0.6 mi)		
2810	153 Poisonous liquid, n.o.s. Poisonous liquid, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)		
2810	153 Poisonous liquid, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
2810	153 Poisonous liquid, organic, n.o.s. Poisonous liquid, organic, n.o.s. (Inhalation Hazard Zone A)	30 m (100 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	300 m (1000 ft)	1.8 km (1.1 mi)	4.5 km (2.8 mi)		
2810	153 Poisonous liquid, organic, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		

"+" means distance can be larger in certain atmospheric conditions



TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide NAME OF MATERIAL		SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
		ISOLATE First in all Directions		PROTECT Then persons Downwind during-		ISOLATE First in all Directions		PROTECT Then persons Downwind during-	
				DAY	NIGHT			DAY	NIGHT
		Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)		
2810	153	Sarin (when used as a weapon)	60 m (200 ft)	0.4 km (0.3 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.1 km (1.3 mi)	4.9 km (3.0 mi)	
2810	153	Soman (when used as a weapon)							
2810	153	Tabun (when used as a weapon)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	100 m (300 ft)	0.5 km (0.4 mi)	0.6 km (0.4 mi)	
2810	153	Thickened GD (when used as a weapon)	60 m (200 ft)	0.4 km (0.3 mi)	0.7 km (0.5 mi)	300 m (1000 ft)	1.8 km (1.1 mi)	2.7 km (1.7 mi)	
2810	153	Toxic liquid, n.o.s.	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)	
2810	153	Toxic liquid, n.o.s. (Inhalation Hazard Zone A)							
2810	153	Toxic liquid, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)	
2810	153	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone A)	30 m (100 ft)	0.3 km (0.2mi)	1.1 km (0.7 mi)	300 m (1000 ft)	1.8 km (1.1 mi)	4.5 km (2.8 mi)	
2810	153	Toxic liquid, organic, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)	
2810	153	VX (when used as a weapon)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	60 m (200 ft)	0.4 km (0.2 mi)	0.3 km (0.2 mi)	
2811	154	CX (when used as a weapon)	60 m (200 ft)	0.2 km (0.2 mi)	1.1 km (0.7 mi)	200 m (600 ft)	1.2 km (0.7 mi)	5.1 km (3.2 mi)	
2826	155	Ethyl chlorothioformate	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	0.7 km (0.4 mi)	
2845	135	Ethyl phosphonous dichloride, anhydrous	30 m (100 ft)	0.3 km (0.2 mi)	0.8 km (0.5 mi)	150 m (500 ft)	1.5 km (0.9 mi)	2.8 km (1.7 mi)	
2845	135	Methyl phosphonous dichloride	30 m (100 ft)	0.4 km (0.3 mi)	1.2 km (0.8 mi)	200 m (600 ft)	2.3 km (1.4 mi)	4.3 km (2.7 mi)	
2901	124	Bromine chloride	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)	6.7 km (4.2 mi)	
2927	154	Ethyl phosphonoethioic dichloride, anhydrous	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	
2927	154	Ethyl phosphorodichloridate	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	
2927	154	Poisonous liquid, corrosive, n.o.s.	60 m (200 ft)	0.4 km (0.2 mi)	0.9 km (0.6 mi)	200 m (600 ft)	1.5 km (1.0 mi)	3.0 km (1.9 mi)	
2927	154	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)							
2927	154	Poisonous liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	0.7 km (0.4 mi)	
2927	154	Poisonous liquid, corrosive, organic, n.o.s.	60 m (200 ft)	0.3 km (0.2 mi)	0.8 km (0.5 mi)	300 m (1000 ft)	1.5 km (1.0 mi)	3.0 km (1.9 mi)	
2927	154	Poisonous liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)							
2927	154	Poisonous liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	0.6 km (0.4 mi)	
2927	154	Toxic liquid, corrosive, n.o.s.	60 m (200 ft)	0.4 km (0.2 mi)	0.9 km (0.6 mi)	200 m (600 ft)	1.5 km (1.0 mi)	3.0 km (1.9 mi)	
2927	154	Toxic liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)							
2927	154	Toxic liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	0.7 km (0.4 mi)	

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
			ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
					DAY	NIGHT			DAY	NIGHT
			Meters (Feet)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)		
2927	154	Toxic liquid, corrosive, organic, n.o.s.	60 m (200 ft)	0.3 km (0.2 mi)	0.8 km (0.5 mi)	300 m (1000 ft)	1.5 km (1.0 mi)	3.0 km (1.9 mi)		
2927	154	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone A)								
2927	154	Toxic liquid, corrosive, organic, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)	0.6 km (0.4 mi)		
2929	131	Poisonous liquid, flammable, n.o.s.	60 m (200 ft)	0.8 km (0.5 mi)	1.7 km (1.1 mi)	300 m (1000 ft)	4.0 km (2.5 mi)	6.5 km (4.1 mi)		
2929	131	Poisonous liquid, flammable, n.o.s. (Inhalation Hazard Zone A)								
2929	131	Poisonous liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
2929	131	Poisonous liquid, flammable, organic, n.o.s.	30 m (100 ft)	0.4 km (0.3 mi)	1.2 km (0.8 mi)	200 m (600 ft)	2.2 km (1.4 mi)	4.6 km (2.9 mi)		
2929	131	Poisonous liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone A)								
2929	131	Poisonous liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
2929	131	Toxic liquid, flammable, n.o.s.	60 m (200 ft)	0.8 km (0.5 mi)	1.7 km (1.1 mi)	300 m (1000 ft)	4.0 km (2.5 mi)	6.5 km (4.1 mi)		
2929	131	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone A)								
2929	131	Toxic liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
2929	131	Toxic liquid, flammable, organic, n.o.s.	30 m (100 ft)	0.4 km (0.3 mi)	1.2 km (0.8 mi)	200 m (600 ft)	2.2 km (1.4 mi)	4.6 km (2.9 mi)		
2929	131	Toxic liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone A)								
2929	131	Toxic liquid, flammable, organic, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
2977	166	Radioactive material, Uranium hexafluoride, fissile (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.3 mi)	60 m (200 ft)	0.5 km (0.3 mi)	2.4 km (1.5 mi)		
2977	166	Uranium hexafluoride, fissile containing more than 1% Uranium-235 (when spilled in water)								
2978	166	Radioactive material, Uranium hexafluoride (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.4 km (0.3 mi)	60 m (200 ft)	0.5 km (0.3 mi)	2.3 km (1.5 mi)		
2978	166	Uranium hexafluoride (when spilled in water)								
2978	166	Uranium hexafluoride, non-fissile or fissile-excepted (when spilled in water)								

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
			ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
			First Meters (Feet)	Then Kilometers (Miles)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	First Meters (Feet)	Then Kilometers (Miles)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)
2985	155	Chlorosilanes, flammable, corrosive, n.o.s. (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.6 km (1.0 mi)		
2985	155	Chlorosilanes, n.o.s. (when spilled in water)								
2986	155	Chlorosilanes, corrosive, flammable, n.o.s. (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.6 km (1.0 mi)		
2986	155	Chlorosilanes, n.o.s. (when spilled in water)								
2987	156	Chlorosilanes, corrosive, n.o.s. (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.6 km (1.0 mi)		
2987	156	Chlorosilanes, n.o.s. (when spilled in water)								
2988	139	Chlorosilanes, n.o.s. (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.6 km (1.0 mi)		
2988	139	Chlorosilanes, water-reactive, flammable, corrosive, n.o.s. (when spilled in water)								
3023	131	2-Methyl-2-heptanethiol	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.2 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.9 km (0.5 mi)		
3023	131	tert-Octyl mercaptan								
3048	157	Aluminum phosphide pesticide (when spilled in water)	60 m (200 ft)	0.2 km (0.2 mi)	0.9 km (0.6 mi)	500 m (1500 ft)	2.1 km (1.3 mi)	7.4 km (4.6 mi)		
3049	138	Metal alkyl halides, water-reactive, n.o.s. (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)		
3049	138	Metal aryl halides, water-reactive, n.o.s. (when spilled in water)								
3052	135	Aluminum alkyl halides (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)		
3052	135	Aluminum alkyl halides, liquid (when spilled in water)								
3052	135	Aluminum alkyl halides, solid (when spilled in water)								
3057	125	Trifluoroacetyl chloride	30 m (100 ft)	0.2 km (0.1 mi)	1.0 km (0.6 mi)	800 m (2500 ft)	4.2 km (2.7 mi)	11.0+ km (7.0+ mi)		
3079	131P	Methacrylonitrile, stabilized	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.4 km (0.3 mi)	0.8 km (0.5 mi)		
3083	124	Perchloryl fluoride	30 m (100 ft)	0.1 km (0.1 mi)	0.6 km (0.4 mi)	400 m (1250 ft)	2.5 km (1.6 mi)	7.7 km (4.8 mi)		
3122	142	Poisonous liquid, oxidizing, n.o.s.	30 m (100 ft)	0.4 km (0.2 mi)	1.4 km (0.9 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)		
3122	142	Poisonous liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.5 km (0.4 mi)	1.0 km (0.6 mi)		
3122	142	Poisonous liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)								
3122	142	Toxic liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	30 m (100 ft)	0.4 km (0.2 mi)	1.4 km (0.9 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)		
3122	142	Toxic liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.5 km (0.4 mi)	1.0 km (0.6 mi)		

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

No. Guide		SMALL SPILLS				LARGE SPILLS			
		(From a small package or small leak from a large package)		(From a large package or from many small packages)		First		Then	
		ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
ID	NAME OF MATERIAL	Meters (Feet)	DAY	NIGHT	Kilometers (Miles)	Meters (Feet)	DAY	NIGHT	Kilometers (Miles)
3123	139 Poisonous liquid, water-reactive, n.o.s.	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	0.4 km (0.3 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)	
3123	139 Poisonous liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)								
3123	139 Poisonous liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)	
3123	139 Poisonous liquid, which in contact with water emits flammable gases, n.o.s.	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	0.4 km (0.3 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)	
3123	139 Poisonous liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)	
3123	139 Toxic liquid, water-reactive, n.o.s.	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	0.4 km (0.3 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)	
3123	139 Toxic liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)								
3123	139 Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)	
3123	139 Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	0.4 km (0.3 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)	
3123	139 Toxic liquid, which in contact with water emits flammable gases, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)	
3160	119 Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	0.5 km (0.3 mi)	600 m (2000 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)	
3160	119 Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	0.1 km (0.1 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	3.5 km (2.2 mi)	
3160	119 Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	0.1 km (0.1 mi)	200 m (600 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)	
3160	119 Liquefied gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	0.1 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)	

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		NAME OF MATERIAL		SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
				ISOLATE First in all Directions		PROTECT Then persons Downwind during-		ISOLATE First in all Directions		PROTECT Then persons Downwind during-	
						DAY	NIGHT			DAY	NIGHT
				Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)		
3160	119	Liquefied gas, toxic, flammable, n.o.s.		100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)		
3160	119	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)									
3160	119	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)		30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	3.5 km (2.2 mi)		
3160	119	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)		30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)		
3160	119	Liquefied gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)		30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
3162	123	Liquefied gas, poisonous, n.o.s.									
3162	123	Liquefied gas, poisonous, n.o.s.		100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)		
3162	123	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone A)									
3162	123	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone B)		30 m (100 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)		
3162	123	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone C)		30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)		
3162	123	Liquefied gas, poisonous, n.o.s. (Inhalation Hazard Zone D)		30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
3162	123	Liquefied gas, toxic, n.o.s.		100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)		
3162	123	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone A)									
3162	123	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone B)		30 m (100 ft)	0.2 km (0.1 mi)	0.8 km (0.5 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)		
3162	123	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone C)		30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)		
3162	123	Liquefied gas, toxic, n.o.s. (Inhalation Hazard Zone D)		30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
3246	156	Methanesulfonyl chloride		30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)	30 m (100 ft)	0.2 km (0.1 mi)	0.3 km (0.2 mi)		
3246	156	Methanesulphonyl chloride									
3275	131	Nitriles, poisonous, flammable, n.o.s.		30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.4 km (0.3 mi)	0.8 km (0.5 mi)		
3275	131	Nitriles, toxic, flammable, n.o.s.									
3276	151	Nitriles, liquid, poisonous, n.o.s.		30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.4 km (0.3 mi)	0.8 km (0.5 mi)		
3276	151	Nitriles, liquid, toxic, n.o.s.									
3276	151	Nitriles, poisonous, liquid, n.o.s.									
3276	151	Nitriles, poisonous, n.o.s.									
3276	151	Nitriles, toxic, liquid, n.o.s.									
3276	151	Nitriles, toxic, n.o.s.									

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		SMALL SPILLS		LARGE SPILLS	
		(From a small package or small leak from a large package)		(From a large package or from many small packages)	
		ISOLATE in all Directions	PROTECT persons Downwind during-	ISOLATE in all Directions	PROTECT persons Downwind during-
		Meters (Feet)	DAY Kilometers (Miles)	Meters (Feet)	DAY Kilometers (Miles)
			NIGHT Kilometers (Miles)		NIGHT Kilometers (Miles)
3278	151	Organophosphorus compound, liquid, poisonous, n.o.s.	0.4 km (0.3 mi)	200 m (600 ft)	2.3 km (1.4 mi)
3278	151	Organophosphorus compound, liquid, toxic, n.o.s.	1.2 km (0.8 mi)		4.3 km (2.7 mi)
3278	151	Organophosphorus compound, poisonous, liquid, n.o.s.			
3278	151	Organophosphorus compound, poisonous, n.o.s.			
3278	151	Organophosphorus compound, toxic, liquid, n.o.s.			
3278	151	Organophosphorus compound, toxic, n.o.s.			
3279	131	Organophosphorus compound, poisonous, flammable, n.o.s.	0.4 km (0.3 mi)	200 m (600 ft)	2.3 km (1.4 mi)
3279	131	Organophosphorus compound, toxic, flammable, n.o.s.	1.2 km (0.8 mi)		4.3 km (2.7 mi)
3280	151	Organoarsenic compound, liquid, n.o.s.	0.4 km (0.3 mi)	200 m (600 ft)	2.3 km (1.4 mi)
3280	151	Organoarsenic compound, n.o.s.	0.2 km (0.1 mi)	150 m (500 ft)	1.8 km (1.1 mi)
3281	151	Metal carbonyls, liquid, n.o.s.	0.8 km (0.5 mi)		4.5 km (2.8 mi)
3281	151	Metal carbonyls, n.o.s.	1.4 km (0.9 mi)	1000 m (3000 ft)	11.0+ km (7.0+ mi)
3287	151	Poisonous liquid, inorganic, n.o.s.	0.6 km (0.4 mi)	300 m (1000 ft)	2.8 km (1.8 mi)
3287	151	Poisonous liquid, inorganic, n.o.s. (Inhalation Hazard Zone A)	2.0 km (1.2 mi)		6.5 km (4.0 mi)
3287	151	Poisonous liquid, inorganic, n.o.s. (Inhalation Hazard Zone B)			
3287	151	Poisonous liquid, inorganic, n.o.s. (Inhalation Hazard Zone A)	0.2 km (0.1 mi)	100 m (300 ft)	1.0 km (0.6 mi)
3287	151	Poisonous liquid, inorganic, n.o.s. (Inhalation Hazard Zone B)	0.3 km (0.2 mi)		1.6 km (1.0 mi)
3287	151	Toxic liquid, inorganic, n.o.s. (Inhalation Hazard Zone A)	0.6 km (0.4 mi)	300 m (1000 ft)	2.8 km (1.8 mi)
3287	151	Toxic liquid, inorganic, n.o.s. (Inhalation Hazard Zone B)	2.0 km (1.2 mi)		6.5 km (4.0 mi)
3287	151	Toxic liquid, inorganic, n.o.s. (Inhalation Hazard Zone A)	0.2 km (0.1 mi)	100 m (300 ft)	1.0 km (0.6 mi)
3287	151	Toxic liquid, inorganic, n.o.s. (Inhalation Hazard Zone B)	0.3 km (0.2 mi)		1.6 km (1.0 mi)
3289	154	Poisonous liquid, corrosive, inorganic, n.o.s.	0.4 km (0.2 mi)	200 m (600 ft)	2.3 km (1.4 mi)
3289	154	Poisonous liquid, corrosive, inorganic, n.o.s.	1.4 km (0.9 mi)		5.1 km (3.2 mi)
3289	154	Poisonous liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)			
3289	154	Poisonous liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone B)			
3289	154	Toxic liquid, corrosive, inorganic, n.o.s.	0.1 km (0.1 mi)	100 m (300 ft)	0.5 km (0.3 mi)
3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)	0.3 km (0.2 mi)		1.1 km (0.7 mi)
3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone B)			
3289	154	Toxic liquid, corrosive, inorganic, n.o.s.	0.4 km (0.2 mi)	200 m (600 ft)	2.3 km (1.4 mi)
3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)	1.4 km (0.9 mi)		5.1 km (3.2 mi)
3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone B)			
3289	154	Toxic liquid, corrosive, inorganic, n.o.s.	0.1 km (0.1 mi)	100 m (300 ft)	0.5 km (0.3 mi)
3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone A)	0.3 km (0.2 mi)		1.1 km (0.7 mi)
3289	154	Toxic liquid, corrosive, inorganic, n.o.s. (Inhalation Hazard Zone B)			

"+" means distance can be larger in certain atmospheric conditions



TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		SMALL SPILLS (From a small package or small leak from a large package)			LARGE SPILLS (From a large package or from many small packages)		
		ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions	
		Meters (Feet)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	DAY Kilometers (Miles)	Meters (Feet)	NIGHT Kilometers (Miles)
3294	131	Hydrogen cyanide, solution in alcohol, with not more than 45% Hydrogen cyanide	60 m (200 ft)	0.2 km (0.1 mi)	0.4 km (0.2 mi)	200 m (600 ft)	0.7 km (0.4 mi)
3300	119P	Carbon dioxide and Ethylene oxide mixture, with more than 87% Ethylene oxide	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.9 km (0.5 mi)
3300	119P	Ethylene oxide and Carbon dioxide mixture, with more than 87% Ethylene oxide					
3303	124	Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.3 mi)	2.1 km (1.3 mi)	600 m (2000 ft)	2.6 km (1.7 mi)
3303	124	Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone B)					
3303	124	Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone C)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3303	124	Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)
3303	124	Compressed gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.7 km (0.4 mi)
3303	124	Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.3 mi)	2.1 km (1.3 mi)	600 m (2000 ft)	2.6 km (1.7 mi)
3303	124	Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3303	124	Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)
3303	124	Compressed gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.7 km (0.4 mi)
3304	123	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)
3304	123	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)
3304	123	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi)
3304	123	Compressed gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		SMALL SPILLS (From a small package or small leak from a large package)			LARGE SPILLS (From a large package or from many small packages)		
		ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions	
		Meters (Feet)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	DAY Kilometers (Miles)	Meters (Feet)	NIGHT Kilometers (Miles)
3304	123	Compressed gas, toxic, corrosive, n.o.s.	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)
3304	123	Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone A)					9.4 km (5.9 mi)
3304	123	Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)
3304	123	Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi)
3304	123	Compressed gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s.	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)					9.4 km (5.9 mi)
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)					4.6 km (2.9 mi)
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)					
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	2.8 km (1.7 mi)
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)					2.0 km (1.3 mi)
3305	119	Compressed gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)
3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)					9.4 km (5.9 mi)
3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)
3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	4.6 km (2.9 mi)
3305	119	Compressed gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)					2.8 km (1.7 mi)
3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s.	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)
3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)					9.4 km (5.9 mi)
3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	6.7 km (4.2 mi)
3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)					2.8 km (1.7 mi)

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		SMALL SPILLS (From a small package or small leak from a large package)			LARGE SPILLS (From a large package or from many small packages)		
		ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions	
		Meters (Feet)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	DAY Kilometers (Miles)	Meters (Feet)	NIGHT Kilometers (Miles)
3306	124	Compressed gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)
3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)
3306	124	Compressed gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)
3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.3 mi)	2.1 km (1.3 mi)	600 m (2000 ft)	2.6 km (1.7 mi)
3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone A)					
3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)
3307	124	Liquefied gas, poisonous, oxidizing, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.7 km (0.4 mi)
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.3 mi)	2.1 km (1.3 mi)	600 m (2000 ft)	2.6 km (1.7 mi)
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.7 km (0.4 mi)
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.7 km (0.4 mi)
3307	124	Liquefied gas, toxic, oxidizing, n.o.s. (Inhalation Hazard Zone D)	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone A)					
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone A)					

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		NAME OF MATERIAL		SMALL SPILLS				LARGE SPILLS						
				(From a small package or small leak from a large package)				(From a large package or from many small packages)						
				ISOLATE in all Directions		PROTECT persons Downwind during- DAY		PROTECT persons Downwind during- NIGHT		ISOLATE in all Directions		PROTECT persons Downwind during- DAY		PROTECT persons Downwind during- NIGHT
Meters (Feet)		Kilometers (Miles)		Kilometers (Miles)		Kilometers (Miles)		Meters (Feet)		Kilometers (Miles)		Kilometers (Miles)		
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)						
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)						
3308	123	Liquefied gas, poisonous, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)						
3308	123	Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)						
3308	123	Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)						
3308	123	Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	150 m (500 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)						
3308	123	Liquefied gas, toxic, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)						
3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)						
3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)						
3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)						
3309	119	Liquefied gas, poisonous, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)						
3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)						
3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.2 km (0.8 mi)	300 m (1000 ft)	1.5 km (0.9 mi)	4.6 km (2.9 mi)						
3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)						
3309	119	Liquefied gas, toxic, flammable, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)						

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
			ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
					DAY	NIGHT			DAY	NIGHT
			Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	Kilometers (Miles)		
3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s.	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)		
3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)								
3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)	6.7 km (4.2 mi)		
3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)		
3310	124	Liquefied gas, poisonous, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s.	100 m (300 ft)	0.5 km (0.4 mi)	2.6 km (1.6 mi)	600 m (2000 ft)	3.5 km (2.2 mi)	9.4 km (5.9 mi)		
3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone A)								
3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone B)	60 m (200 ft)	0.3 km (0.2 mi)	1.1 km (0.7 mi)	400 m (1250 ft)	2.5 km (1.5 mi)	6.7 km (4.2 mi)		
3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	0.9 km (0.6 mi)	2.8 km (1.7 mi)		
3310	124	Liquefied gas, toxic, oxidizing, corrosive, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
3318	125	Ammonia solution, with more than 50% Ammonia	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	150 m (500 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
3355	119	Insecticide gas, poisonous, flammable, n.o.s.	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)		
3355	119	Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone A)								
3355	119	Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	3.5 km (2.2 mi)		
3355	119	Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)		
3355	119	Insecticide gas, poisonous, flammable, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
3355	119	Insecticide gas, toxic, flammable, n.o.s.	100 m (300 ft)	0.5 km (0.3 mi)	2.2 km (1.4 mi)	600 m (2000 ft)	2.6 km (1.7 mi)	8.6 km (5.4 mi)		
3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone A)								
3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	300 m (1000 ft)	1.3 km (0.8 mi)	3.5 km (2.2 mi)		

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No. Guide		NAME OF MATERIAL	SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)			
			ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions		PROTECT persons Downwind during-	
			First Meters (Feet)	DAY Kilometers (Miles)	Then NIGHT Kilometers (Miles)	First Meters (Feet)	DAY Kilometers (Miles)	Then NIGHT Kilometers (Miles)		
3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone C)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	200 m (600 ft)	1.0 km (0.7 mi)	3.2 km (2.0 mi)		
3355	119	Insecticide gas, toxic, flammable, n.o.s. (Inhalation Hazard Zone D)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	200 m (600 ft)	0.8 km (0.5 mi)	2.0 km (1.3 mi)		
3361	156	Chlorosilanes, poisonous, corrosive, n.o.s. (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.6 km (1.0 mi)		
3361	156	Chlorosilanes, toxic, corrosive, n.o.s. (when spilled in water)								
3362	155	Chlorosilanes, poisonous, corrosive, flammable, n.o.s. (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	1.6 km (1.0 mi)		
3362	155	Chlorosilanes, toxic, corrosive, flammable, n.o.s. (when spilled in water)								
3381	151	Poisonous by inhalation liquid, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)		
3381	151	Toxic by inhalation liquid, n.o.s. (Inhalation Hazard Zone A)								
3382	151	Poisonous by inhalation liquid, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
3382	151	Toxic by inhalation liquid, n.o.s. (Inhalation Hazard Zone B)								
3383	131	Poisonous by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.8 km (0.5 mi)	1.7 km (1.1 mi)	300 m (1000 ft)	4.0 km (2.5 mi)	6.5 km (4.1 mi)		
3383	131	Toxic by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone A)								
3384	131	Poisonous by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
3384	131	Toxic by inhalation liquid, flammable, n.o.s. (Inhalation Hazard Zone B)								
3385	139	Poisonous by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.3 mi)	1.3 km (0.8 mi)	200 m (600 ft)	2.3 km (1.4 mi)	5.1 km (3.2 mi)		
3385	139	Toxic by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone A)								
3386	139	Poisonous by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)		
3386	139	Toxic by inhalation liquid, water-reactive, n.o.s. (Inhalation Hazard Zone B)								

"+" means distance can be larger in certain atmospheric conditions



TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

ID No.      Guide      NAME OF MATERIAL		SMALL SPILLS (From a small package or small leak from a large package)			LARGE SPILLS (From a large package or from many small packages)		
		ISOLATE in all Directions		PROTECT persons Downwind during-		ISOLATE in all Directions	
		Meters (Feet)	Then DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	Then DAY Kilometers (Miles)	Meters (Feet)	NIGHT Kilometers (Miles)
3387	142	Poisonous by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)	30 m (100 ft)	0.4 km (0.2 mi)	1.4 km (0.9 mi)	200 m (600 ft)	2.3 km (1.4 mi)
3387	142	Toxic by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone A)					5.1 km (3.2 mi)
3388	142	Poisonous by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.3 km (0.2 mi)	60 m (200 ft)	0.5 km (0.4 mi)
3388	142	Toxic by inhalation liquid, oxidizing, n.o.s. (Inhalation Hazard Zone B)					1.0 km (0.6 mi)
3389	154	Poisonous by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.4 km (0.2 mi)	0.9 km (0.6 mi)	200 m (600 ft)	1.5 km (1.0 mi)
3389	154	Toxic by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone A)					3.0 km (1.9 mi)
3390	154	Poisonous by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)	30 m (100 ft)	0.4 km (0.3 mi)
3390	154	Toxic by inhalation liquid, corrosive, n.o.s. (Inhalation Hazard Zone B)					0.7 km (0.4 mi)
3456	157	Nitrosylsulfuric acid, solid (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.5 km (0.3 mi)	200 m (600 ft)	0.7 km (0.5 mi)
3456	157	Nitrosylsulphuric acid, solid (when spilled in water)					2.5 km (1.6 mi)
3461	135	Aluminum alkyl halides, solid (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.4 km (0.3 mi)
3488	131	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.8 km (0.5 mi)	1.7 km (1.1 mi)	300 m (1000 ft)	6.5 km (4.1 mi)
3488	131	Toxic by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone A)					
3489	131	Poisonous by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)
3489	131	Toxic by inhalation liquid, flammable, corrosive, n.o.s. (Inhalation Hazard Zone B)					0.7 km (0.5 mi)
3490	155	Poisonous by inhalation liquid, water-reactive, flammable, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.8 km (0.5 mi)	1.7 km (1.1 mi)	300 m (1000 ft)	6.5 km (4.1 mi)
3490	155	Toxic by inhalation liquid, water reactive, flammable, n.o.s. (Inhalation Hazard Zone A)					
3491	155	Poisonous by inhalation liquid, water-reactive, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)	60 m (200 ft)	0.5 km (0.3 mi)
3491	155	Toxic by inhalation liquid, water reactive, flammable, n.o.s. (Inhalation Hazard Zone B)					0.7 km (0.5 mi)

"+" means distance can be larger in certain atmospheric conditions

TABLE 1 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES

		SMALL SPILLS (From a small package or small leak from a large package)				LARGE SPILLS (From a large package or from many small packages)					
ID	No.	Guide	NAME OF MATERIAL	ISOLATE First in all Directions		PROTECT Then persons Downwind during-		ISOLATE First in all Directions		PROTECT Then persons Downwind during-	
				Meters (Feet)	Kilometers (Miles)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)	Meters (Feet)	Kilometers (Miles)	DAY Kilometers (Miles)	NIGHT Kilometers (Miles)
3492	131		Poisonous by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone A)	60 m (200 ft)	0.8 km (0.5 mi)	1.7 km (1.1 mi)		300 m (1000 ft)	4.0 km (2.5 mi)	6.5 km (4.1 mi)	
3492	131		Toxic by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone A)								
3493	131		Poisonous by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone B)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)	
3493	131		Toxic by inhalation liquid, corrosive, flammable, n.o.s. (Inhalation Hazard Zone B)								
3494	131		Petroleum sour crude oil, flammable, toxic	30 m (100 ft)	0.2 km (0.1 mi)	0.2 km (0.1 mi)		60 m (200 ft)	0.5 km (0.3 mi)	0.7 km (0.5 mi)	
9191	143		Chlorine dioxide, hydrate, frozen (when spilled in water)	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.2 km (0.2 mi)	0.6 km (0.4 mi)	
9202	168		Carbon monoxide, refrigerated liquid (cryogenic liquid)	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		200 m (600 ft)	1.2 km (0.8 mi)	4.8 km (3.0 mi)	
9206	137		Methyl phosphonic dichloride	30 m (100 ft)	0.1 km (0.1 mi)	0.2 km (0.1 mi)		30 m (100 ft)	0.4 km (0.3 mi)	0.6 km (0.4 mi)	
9263	156		Chloropivaloyl chloride	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.3 km (0.2 mi)	0.3 km (0.2 mi)	
9264	151		3,5-Dichloro-2,4,6-trifluoropyridine	30 m (100 ft)	0.1 km (0.1 mi)	0.1 km (0.1 mi)		30 m (100 ft)	0.3 km (0.2 mi)	0.3 km (0.2 mi)	
9269	132		Trimethoxysilane	30 m (100 ft)	0.2 km (0.1 mi)	0.5 km (0.3 mi)		100 m (300 ft)	0.9 km (0.6 mi)	1.9 km (1.2 mi)	
				See Next Page for Table of Water-Reactive Materials Which Produce Toxic Gases							

"+" means distance can be larger in certain atmospheric conditions

## HOW TO USE TABLE 2 – WATER-REACTIVE MATERIALS WHICH PRODUCE TOXIC GASES

Table 2 lists materials which produce large amounts of Toxic Inhalation Hazard (TIH) gases when spilled in water and identifies the TIH gases produced.

The materials are listed by ID number order.

These Water Reactive materials are easily identified in Table 1 as their name is immediately followed by (when spilled in water).

Note : Some Water Reactive materials are also TIH materials themselves (e.g., Bromine trifluoride (1746), Thionyl chloride (1836), etc.). In these instances, two entries are provided in Table 1 for land-based and water-based spills. If the Water Reactive material is NOT a TIH and this material is NOT spilled in water, Table 1 and Table 2 do not apply and safety distances will be found within the appropriate orange guide.

TABLE 2 - WATER-REACTIVE MATERIALS WHICH PRODUCE TOXIC GASES

Materials Which Produce Large Amounts of Toxic-by-Inhalation (TIH) Gas(es)  
When Spilled in Water

ID No.	Guide No.	Name of Material	TIH Gas(es) Produced
1162	155	Dimethyldichlorosilane	HCl
1183	139	Ethylchlorosilane	HCl
1196	155	Ethyltrichlorosilane	HCl
1242	139	Methyldichlorosilane	HCl
1250	155	Methyltrichlorosilane	HCl
1295	139	Trichlorosilane	HCl
1298	155	Trimethylchlorosilane	HCl
1305	155P	Vinyltrichlorosilane	HCl
1305	155P	Vinyltrichlorosilane, stabilized	HCl
1340	139	Phosphorus pentasulfide, free from yellow and white Phosphorus	H <sub>2</sub> S
1340	139	Phosphorus pentasulphide, free from yellow and white Phosphorus	H <sub>2</sub> S
1360	139	Calcium phosphide	PH <sub>3</sub>
1384	135	Sodium dithionite	H <sub>2</sub> S SO <sub>2</sub>
1384	135	Sodium hydrosulfite	H <sub>2</sub> S SO <sub>2</sub>
1384	135	Sodium hydrosulphite	H <sub>2</sub> S SO <sub>2</sub>
1397	139	Aluminum phosphide	PH <sub>3</sub>
1419	139	Magnesium aluminum phosphide	PH <sub>3</sub>
1432	139	Sodium phosphide	PH <sub>3</sub>
1541	155	Acetone cyanohydrin, stabilized	HCN
1680	157	Potassium cyanide	HCN
1680	157	Potassium cyanide, solid	HCN
1689	157	Sodium cyanide	HCN
1689	157	Sodium cyanide, solid	HCN

Chemical Symbols for TIH Gases:

Br <sub>2</sub>	Bromine	HF	Hydrogen fluoride	NO <sub>2</sub>	Nitrogen dioxide
Cl <sub>2</sub>	Chlorine	HI	Hydrogen iodide	PH <sub>3</sub>	Phosphine
Hbr	Hydrogen bromide	H <sub>2</sub> S	Hydrogen sulfide	SO <sub>2</sub>	Sulfur dioxide
Hcl	Hydrogen chloride	H <sub>2</sub> S	Hydrogen sulphide	So <sub>2</sub>	Sulphur dioxide
HCN	Hydrogen cyanide	NH <sub>3</sub>	Ammonia		

TABLE 2 - WATER-REACTIVE MATERIALS WHICH PRODUCE TOXIC GASES

Materials Which Produce Large Amounts of Toxic-by-Inhalation (TIH) Gas(es)  
When Spilled in Water

ID No.	Guide No.	Name of Material	TIH Gas(es) Produced
1716	156	Acetyl bromide	HBr
1717	155	Acetyl chloride	HCl
1724	155	Allyltrichlorosilane, stabilized	HCl
1725	137	Aluminum bromide, anhydrous	HBr
1726	137	Aluminum chloride, anhydrous	HCl
1728	155	Amyltrichlorosilane	HCl
1732	157	Antimony pentafluoride	HF
1741	125	Boron trichloride	HCl
1745	144	Bromine pentafluoride	HF Br <sub>2</sub>
1746	144	Bromine trifluoride	HF Br <sub>2</sub>
1747	155	Butyltrichlorosilane	HCl
1752	156	Chloroacetyl chloride	HCl
1753	156	Chlorophenyltrichlorosilane	HCl
1754	137	Chlorosulfonic acid	HCl
1754	137	Chlorosulfonic acid and Sulfur trioxide mixture	HCl
1754	137	Chlorosulphonic acid	HCl
1754	137	Chlorosulphonic acid and Sulphur trioxide mixture	HCl
1754	137	Sulfur trioxide and Chlorosulfonic acid	HCl
1754	137	Sulphur trioxide and Chlorosulphonic acid	HCl
1758	137	Chromium oxychloride	HCl
1762	156	Cyclohexenyltrichlorosilane	HCl
1763	156	Cyclohexyltrichlorosilane	HCl
1765	156	Dichloroacetyl chloride	HCl

Chemical Symbols for TIH Gases:

Br <sub>2</sub>	Bromine	HF	Hydrogen fluoride	NO <sub>2</sub>	Nitrogen dioxide
Cl <sub>2</sub>	Chlorine	HI	Hydrogen iodide	PH <sub>3</sub>	Phosphine
Hbr	Hydrogen bromide	H <sub>2</sub> S	Hydrogen sulfide	SO <sub>2</sub>	Sulfur dioxide
Hcl	Hydrogen chloride	H <sub>2</sub> S	Hydrogen sulphide	So <sub>2</sub>	Sulphur dioxide
HCN	Hydrogen cyanide	NH <sub>3</sub>	Ammonia		

TABLE 2 - WATER-REACTIVE MATERIALS WHICH PRODUCE TOXIC GASES

Materials Which Produce Large Amounts of Toxic-by-Inhalation (TIH) Gas(es)  
When Spilled in Water

ID No.	Guide No.	Name of Material	TIH Gas(es) Produced
1766	156	Dichlorophenyltrichlorosilane	HCl
1767	155	Diethyldichlorosilane	HCl
1769	156	Diphenyldichlorosilane	Hcl
1771	156	Dodecyltrichlorosilane	HCl
1777	137	Fluorosulfonic acid	HF
1777	137	Fluorosulphonic acid	HF
1781	156	Hexadecyltrichlorosilane	HCl
1784	156	Hexyltrichlorosilane	HCl
1799	156	Nonyltrichlorosilane	HCl
1800	156	Octadecyltrichlorosilane	HCl
1801	156	Octyltrichlorosilane	HCl
1804	156	Phenyltrichlorosilane	HCl
1806	137	Phosphorus pentachloride	HCl
1808	137	Phosphorus tribromide	HBr
1809	137	Phosphorus trichloride	HCl
1810	137	Phosphorus oxychloride	HCl
1815	132	Propionyl chloride	HCl
1816	155	Propyltrichlorosilane	HCl
1818	157	Silicon tetrachloride	HCl
1828	137	Sulfur chlorides	HCl SO <sub>2</sub> H <sub>2</sub> S
1828	137	Sulphur chlorides	HCl SO <sub>2</sub> H <sub>2</sub> S
1834	137	Sulfuryl chloride	HCl
1834	137	Sulphuryl chloride	HCl

Chemical Symbols for TIH Gases:

Br <sub>2</sub>	Bromine	HF	Hydrogen fluoride	NO <sub>2</sub>	Nitrogen dioxide
Cl <sub>2</sub>	Chlorine	HI	Hydrogen iodide	PH <sub>3</sub>	Phosphine
Hbr	Hydrogen bromide	H <sub>2</sub> S	Hydrogen sulfide	SO <sub>2</sub>	Sulfur dioxide
Hcl	Hydrogen chloride	H <sub>2</sub> S	Hydrogen sulphide	So <sub>2</sub>	Sulphur dioxide
HCN	Hydrogen cyanide	NH <sub>3</sub>	Ammonia		

TABLE 2 - WATER-REACTIVE MATERIALS WHICH PRODUCE TOXIC GASES

Materials Which Produce Large Amounts of Toxic-by-Inhalation (TIH) Gas(es) When Spilled in Water					
ID No.	Guide No.	Name of Material		TIH Gas(es) Produced	
1836	137	Thionyl chloride		HCl SO <sub>2</sub>	
1838	137	Titanium tetrachloride		HCl	
1898	156	Acetyl iodide		HI	
1923	135	Calcium dithionite		H <sub>2</sub> S SO <sub>2</sub>	
1923	135	Calcium hydrosulfite		H <sub>2</sub> S SO <sub>2</sub>	
1923	135	Calcium hydrosulphite		H <sub>2</sub> S SO <sub>2</sub>	
1929	135	Potassium dithionite		H <sub>2</sub> S SO <sub>2</sub>	
1929	135	Potassium hydrosulfite		H <sub>2</sub> S SO <sub>2</sub>	
1929	135	Potassium hydrosulphite		H <sub>2</sub> S SO <sub>2</sub>	
1931	171	Zinc dithionite		H <sub>2</sub> S SO <sub>2</sub>	
1931	171	Zinc hydrosulfite		H <sub>2</sub> S SO <sub>2</sub>	
1931	171	Zinc hydrosulphite		H <sub>2</sub> S SO <sub>2</sub>	
2004	135	Magnesium diamide		NH <sub>3</sub>	
2011	139	Magnesium phosphide		PH <sub>3</sub>	
2012	139	Potassium phosphide		PH <sub>3</sub>	
2013	139	Strontium phosphide		PH <sub>3</sub>	
2308	157	Nitrosylsulfuric acid		NO <sub>2</sub>	
2308	157	Nitrosylsulfuric acid, liquid		NO <sub>2</sub>	
2308	157	Nitrosylsulfuric acid, solid		NO <sub>2</sub>	
2308	157	Nitrosylsulphuric acid		NO <sub>2</sub>	
2308	157	Nitrosylsulphuric acid, liquid		NO <sub>2</sub>	
2308	157	Nitrosylsulphuric acid, solid		NO <sub>2</sub>	
2353	132	Butyl chloride		HCl	
Chemical Symbols for TIH Gases:					
Br <sub>2</sub>	Bromine	HF	Hydrogen fluoride	NO <sub>2</sub>	Nitrogen dioxide
Cl <sub>2</sub>	Chlorine	HI	Hydrogen iodide	PH <sub>3</sub>	Phosphine
Hbr	Hydrogen bromide	H <sub>2</sub> S	Hydrogen sulfide	SO <sub>2</sub>	Sulfur dioxide
Hcl	Hydrogen chloride	H <sub>2</sub> S	Hydrogen sulphide	So <sub>2</sub>	Sulphur dioxide
HCN	Hydrogen cyanide	NH <sub>3</sub>	Ammonia		

TABLE 2 - WATER-REACTIVE MATERIALS WHICH PRODUCE TOXIC GASES

Materials Which Produce Large Amounts of Toxic-by-Inhalation (TIH) Gas(es) When Spilled in Water					
ID No.	Guide No.	Name of Material	TIH Gas(es) Produced		
2395	132	Isobutryl chloride	HCl		
2434	156	Dibenzylchlorosilane	Hcl		
2435	156	Ethylphenyldichlorosilane	HCl		
2437	156	Methylphenyldichlorosilane	HCl		
2495	144	Iodine pentafluoride	HF		
2691	137	Phosphorus pentabromide	HBr		
2692	157	Boron tribromide	HBr		
2806	138	Lithium nitride	NH <sub>3</sub>		
2977	166	Radioactive material, Uranium hexafluoride, fissile	HF		
2977	166	Uranium hexafluoride, fissile containing more than 1% Uranium-235	HF		
2978	166	Radioactive material, Uranium hexafluoride	HF		
2978	166	Uranium hexafluoride	HF		
2978	166	Uranium hexafluoride, non fissile or fissile-excepted	HF		
2985	155	Chlorosilanes, flammable, corrosive, n.o.s	HCl		
2985	155	Chlorosilanes, n.o.s	HCl		
2986	155	Chlorosilanes, corrosive, flammable, n.o.s	HCl		
2986	155	Chlorosilanes, n.o.s	HCl		
2987	156	Chlorosilanes, corrosive, n.o.s	HCl		
2987	156	Chlorosilanes, n.o.s	HCl		
2988	139	Chlorosilanes, n.o.s	HCl		
2988	139	Chlorosilanes, water-reactive, flammable, corrosive, n.o.s.	HCl		
3048	157	Aluminum phosphide pesticide	PH <sub>3</sub>		
Chemical Symbols for TIH Gases:					
Br <sub>2</sub>	Bromine	HF	Hydrogen fluoride	NO <sub>2</sub>	Nitrogen dioxide
Cl <sub>2</sub>	Chlorine	HI	Hydrogen iodide	PH <sub>3</sub>	Phosphine
Hbr	Hydrogen bromide	H <sub>2</sub> S	Hydrogen sulfide	SO <sub>2</sub>	Sulfur dioxide
Hcl	Hydrogen chloride	H <sub>2</sub> S	Hydrogen sulphide	So <sub>2</sub>	Sulphur dioxide
HCN	Hydrogen cyanide	NH <sub>3</sub>	Ammonia		

TABLE 2 - WATER-REACTIVE MATERIALS WHICH PRODUCE TOXIC GASES

Materials Which Produce Large Amounts of Toxic-by-Inhalation (TIH) Gas(es) When Spilled in Water			
ID No.	Guide No.	Name of Material	TIH Gas(es) Produced
3049	138	Metal alkyl halides, water-reactive, n.o.s	HCl
3049	138	Metal aryl halides, water-reactive, n.o.s	HCl
3052	135	Aluminum alkyl halide	HCl
3052	135	Aluminum alkyl halides, liquid	HCl
3052	135	Aluminum alkyl halides, solid	HCl
3361	156	Chlorosilanes, poisonous, corrosive, n.o.s.	HCl
3361	156	Chlorosilanes, toxic, corrosive, n.o.s.	HCl
3362	155	Chlorosilanes, poisonous, corrosive, flammable, n.o.s.	HCl
3362	155	Chlorosilanes, toxic, corrosive, flammable, n.o.s.	HCl
3456	157	Nitrosylsulfuric acid, solid	NO <sub>2</sub>
3456	157	Nitrosylsulphuric acid, solid	NO <sub>2</sub>
3461	135	Aluminum alkyl halides, solid	HCl
9191	143	Chlorine dioxide, hydrate, frozen	Cl <sub>2</sub>

Chemical Symbols for TIH Gases:

Br <sub>2</sub>	Bromine	HF	Hydrogen fluoride	NO <sub>2</sub>	Nitrogen dioxide
Cl <sub>2</sub>	Chlorine	HI	Hydrogen iodide	PH <sub>3</sub>	Phosphine
Hbr	Hydrogen bromide	H <sub>2</sub> S	Hydrogen sulfide	SO <sub>2</sub>	Sulfur dioxide
Hcl	Hydrogen chloride	H <sub>2</sub> S	Hydrogen sulphide	So <sub>2</sub>	Sulphur dioxide
HCN	Hydrogen cyanide	NH <sub>3</sub>	Ammonia		

NOTES



## HOW TO USE TABLE 3 – INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES FOR DIFFERENT QUANTITIES OF SIX COMMON TIH GASES

Table 3 lists Toxic Inhalation Hazard materials that may be more commonly encountered.

The selected materials are:

- Ammonia (UN1005)
- Chlorine (UN1017)
- Ethylene oxide (UN1040)
- Hydrogen chloride (UN1050) and Hydrogen chloride, refrigerated liquid (UN2186)
- Hydrogen fluoride (UN1052)
- Sulfur dioxide/Sulphur dioxide (UN1079)

The materials are presented in alphabetical order and provide Initial Isolation and Protective Action Distances for large spills (more than 208 liters) involving different container types (therefore different volume capacities) for day time and night time situations and different wind speeds.

TABLE 3 - INITIAL ISOLATION AND PROTECTIVE ACTION DISTANCES FOR DIFFERENT QUANTITIES OF SIX COMMON TIH GASES

UN1005 Ammonia, anhydrous: Large Spills							
TRANSPORT CONTAINER	First ISOLATE in all Directions	Then PROTECT persons Downwind during					
		DAY			NIGHT		
	Meters (Feet)	Low wind ( $< 6$ mph = $< 10$ km/h) Km (Miles)	Moderate wind (6-12 mph = 10 - 20 km/h) Km (Miles)	High wind ( $> 12$ mph = $> 20$ km/h) Km (Miles)	Low wind ( $< 6$ mph = $< 10$ km/h) Km (Miles)	Moderate wind (6-12 mph = 10 - 20 km/h) Km (Miles)	High wind ( $> 12$ mph = $> 20$ km/h) Km (Miles)
	300 (1000)	2.3 (1.4)	1.3 (0.8)	1.0 (0.6)	6.3 (3.9)	2.6 (1.6)	1.3 (0.8)
Rail tank car	125 (400)	1.0 (0.6)	0.5 (0.3)	0.3 (0.2)	2.6 (1.6)	0.8 (0.5)	0.5 (0.3)
Highway tank truck or trailer	60 (200)	0.6 (0.4)	0.3 (0.2)	0.3 (0.2)	1.5 (0.9)	0.5 (0.3)	0.3 (0.2)
Agricultural nurse tank	30 (100)	0.3 (0.2)	0.2 (0.1)	0.2 (0.1)	0.8 (0.5)	0.3 (0.2)	0.2 (0.1)
Multiple small cylinders							
TRANSPORT CONTAINER	UN1017 Chlorine: Large Spills						
Rail tank car	1000 (3000)	11+ (7+)	9.0 (5.6)	5.5 (3.4)	11+ (7+)	11+ (7+)	7.1 (4.4)
Highway tank truck or trailer	1000 (3000)	10.6 (6.6)	3.5 (2.2)	2.9 (1.8)	11+ (7+)	5.5 (3.4)	4.2 (2.6)
Multiple ton cylinders	400 (1250)	4.0 (2.5)	1.5 (0.9)	1.1 (0.7)	7.9 (4.9)	2.7 (1.7)	1.5 (0.9)
Multiple small cylinders or single ton cylinder	250 (800)	2.6 (1.6)	1.0 (0.6)	0.8 (0.5)	5.6 (3.5)	1.8 (1.1)	0.8 (0.5)

"+" means distance can be larger in certain atmospheric conditions

TRANSPORT CONTAINER	UN1005 Ammonia, anhydrous: Large Spills						
	First ISOLATE in all Directions Meters (Feet)	Then PROTECT persons Downwind during					
		DAY			NIGHT		
		Low wind (< 6 mph < 10 km/h) Km (Miles)	Moderate wind (6-12 mph = 10 - 20 km/h) Km (Miles)	High wind (> 12 mph = > 20 km/h) Km (Miles)	Low wind (< 6 mph < 10 km/h) Km (Miles)	Moderate wind (6-12 mph = 10 - 20 km/h) Km (Miles)	High wind (> 12 mph = > 20 km/h) Km (Miles)
Rail tank car	200 (600)	1.4 (0.9)	0.8 (0.5)	0.6 (0.4)	4.0 (2.5)	1.4 (0.9)	0.8 (0.5)
Highway tank truck or tra	100 (300)	0.8 (0.5)	0.5 (0.3)	0.3 (0.2)	2.1 (1.3)	0.6 (0.4)	0.5 (0.3)
Multiple small cylinders or single ton cylinder	30 (100)	0.3 (0.2)	0.2 (0.1)	0.2 (0.1)	0.8 (0.5)	0.3 (0.2)	0.2 (0.1)
TRANSPORT CONTAINER	Un1050 Hydrogen Chlorine: Large Spills Un2186 Hydrogen Chlorine, refrigerated: Large Spills						
Rail tank car	600 (2000)	6.1 (3.8)	2.3 (1.4)	1.8 (1.1)	11+ (7+)	4.0 (2.5)	2.6 (1.6)
Highway tank truck or trailer	300 (1000)	3.1 (1.9)	1.1 (0.7)	0.8 (0.5)	7.4 (4.6)	2.1 (1.3)	1.0 (0.6)
Multiple ton cylinders	60 (200)	0.6 (0.4)	0.3 (0.2)	0.2 (0.1)	1.8 (1.1)	0.3 (0.2)	0.2 (0.1)
Multiple small cylinders or single ton cylinder	45 (150)	0.5 (0.3)	0.2 (0.1)	0.2 (0.1)	1.5 (0.9)	0.3 (0.2)	0.2 (0.1)

--

TRANSPORT CONTAINER	Un1052 Hydrogen fluoride: Large Spills						
	First ISOLATE in all Directions Meters (Feet)	Then PROTECT persons Downwind during					
		DAY			NIGHT		
		Low wind (< 6 mph < 10 km/h) Km (Miles)	Moderate wind (6-12 mph = 10 - 20 km/h) Km (Miles)	High wind (> 12 mph = > 20 km/h) Km (Miles)	Low wind (< 6 mph < 10 km/h) Km (Miles)	Moderate wind (6-12 mph = 10 - 20 km/h) Km (Miles)	High wind (> 12 mph = > 20 km/h) Km (Miles)
Rail tank car	400 (1250)	3.2 (2.0)	1.9 (1.2)	1.6 (1.0)	7.9 (4.9)	3.1 (1.9)	1.9 (1.2)
Highway tank truck or tra	210 (700)	0.8 (1.2)	1.5 (0.6)	0.8 (0.5)	3.9 (2.4)	1.6 (1.0)	1.0 (0.6)
Multiple small cylinders or single ton cylinder	100 (300)	0.8 (0.5)	0.3 (0.2)	0.3 (0.2)	1.6 (1.0)	0.5 (0.3)	0.3 (0.2)
TRANSPORT CONTAINER	Un1079 Sulfur dioxide/Sulphur dioxide: Large Spills						
Rail tank car	1000 (3000)	11+ (7+)	11+ (7+)	7.6 (4.7)	11+ (7+)	11+ (7+)	10.8 (6.7)
Highway tank truck or trailer	1000 (3000)	11+ (7+)	7.6 (4.7)	5.1 (3.2)	11+ (7+)	10 (6.2)	6.1 (3.8)
Multiple ton cylinders	600 (2000)	7.1 (4.4)	2.7 (1.7)	1.9 (1.2)	10.5 (6.5)	4.7 (2.9)	2.9 (1.8)
Multiple small cylinders or single ton cylinder	300 (1000)	5.3 (3.3)	1.6 (1.0)	1.1 (0.7)	7.9 (4.9)	2.7 (1.7)	1.5 (0.9)

"+" means distance can be larger in certain atmospheric conditions

## ERG2012 USER'S GUIDE

This guidebook has been redeveloped by GSDMA as per the Gujarat context on the basis of The 2012 Emergency Response Guidebook (ERG2012). Originally, the ERG2012 was developed jointly by Transport Canada (TC), the U.S. Department of Transportation (DOT), the Secretariat of Transport and Communications of Mexico (SCT) and with the collaboration of CIQUIME (Centro de Información Química para Emergencias) of Argentina, for use by fire fighters, police, and other emergency services personnel who may be the first to arrive at the scene of a transportation incident involving dangerous goods. It is primarily a guide to aid first responders in quickly identifying the specific or generic hazards of the material(s) involved in the incident, and protecting themselves and the general public during the initial response phase of the incident. For the purposes of this guidebook, the "initial response phase" is that period following arrival at the scene of an incident during which the presence and/or identification of dangerous goods is confirmed, protective actions and area securement are initiated, and assistance of qualified personnel is requested. It is not intended to provide information on the physical or chemical properties of dangerous goods.

This guidebook will assist responders in making initial decisions upon arriving at the scene of a dangerous goods incident. It should not be considered as a substitute for emergency response training, knowledge or sound judgment. ERG2012 does not address all possible circumstances that may be associated with a dangerous goods incident. It is primarily designed for use at a dangerous goods incident occurring on a highway or railroad. Be mindful that there may be limited value in its application at fixed facility locations.

ERG2012 incorporates dangerous goods lists from the most recent United Nations Recommendations as well as from other international and national regulations. Explosives are not listed individually by either proper shipping name or ID Number. They do, however, appear under the general heading "Explosives" on the first page of the ID Number index (yellow-bordered pages) and alphabetically in the Name of Material index (blue-bordered pages). Also, the letter (P) following the guide number in the yellow-bordered and blue-bordered pages identifies those materials which present a polymerization hazard under certain conditions, for example: Acrolein, stabilized 131P.

First responders at the scene of a dangerous goods incident should seek additional specific information about any material in question as soon as possible. The information received by contacting the appropriate emergency response agency, by calling the emergency response telephone number on the shipping document, or by consulting the information on or accompanying the shipping document, may be more specific and accurate than this guidebook in providing guidance for the materials involved.

**BEFORE AN EMERGENCY – BECOME FAMILIAR WITH THIS GUIDEBOOK!**

## GUIDEBOOK CONTENTS

**1-Yellow-bordered pages:** Index list of dangerous goods in numerical order of ID number. This section quickly identifies the guide to be consulted from the ID Number of the material involved. This list displays the 4-digit ID number of the material followed by its assigned emergency response guide and the material name.

For example:	ID No. 1090	GUIDE No. 127	Name of Material Acetone
--------------	----------------	------------------	-----------------------------

**2-Blue-bordered pages:** Index list of dangerous goods in alphabetical order of material name. This section quickly identifies the guide to be consulted from the name of the material involved. This list displays the name of the material followed by its assigned emergency response guide and 4-digit ID number.

For example:	Name of Material Sulfuric acid	GUIDE No. 137	ID No. 1830
--------------	-----------------------------------	------------------	----------------

**3-Orange-bordered pages:** This section is the most important section of the guidebook because it is where all safety recommendations are provided. It comprises a total of 62 individual guides, presented in a two-page format. Each guide provides safety recommendations and emergency response information to protect yourself and the public. The left hand page provides safety related information whereas the right hand page provides emergency response guidance and activities for fire situations, spill or leak incidents and first aid. Each guide is designed to cover a group of materials which possess similar chemical and toxicological characteristics.

The guide title identifies the general hazards of the dangerous goods covered.

For example: GUIDE 124 - Gases-Toxic and/or Corrosive-Oxidizing.

Each guide is divided into three main sections: the first section describes potential hazards that the material may display in terms of fire/explosion and health effects upon exposure. The highest potential is listed first. The emergency responder should consult this section first. This allows the responder to make decisions regarding the protection of the emergency response team as well as the surrounding population.

The second section outlines suggested public safety measures based on the situation at hand. It provides general information regarding immediate isolation of the incident site, recommended type of protective clothing and respiratory protection. Suggested evacuation distances are listed for small and large spills and for fire situations (fragmentation hazard). It also directs the reader to consult the tables listing Toxic Inhalation Hazard (TIH) materials, chemical warfare agents and water-reactive materials (green-bordered pages) when the material is highlighted in the yellow-bordered and blue-bordered pages.

The third section covers emergency response actions, including first aid. It outlines special precautions for incidents which involve fire, spill or chemical exposure. Several recommendations are listed under each part which will further assist in the decision making process. The information on first aid is general guidance prior to seeking medical care.

4-Green-bordered pages: This section contains three tables.

Table 1 lists, by ID number order, TIH materials, including certain chemical warfare agents, and water-reactive materials which produce toxic gases upon contact with water. This table provides two different types of recommended safe distances which are "Initial isolation distances" and "Protective action distances". The materials are highlighted in green for easy identification in both numeric (yellow-bordered pages) and alphabetic (blue-bordered pages) lists of the guidebook. This table provides distances for both small (approximately 208 liters or less for liquids and 300 kilograms (660 pounds) or less for solids when spilled in water) and large spills (more than 208 liters for liquids and more than 300 kilograms (660 pounds) for solids when spilled in water) for all highlighted materials. The list is further subdivided into daytime and nighttime situations. This is necessary due to varying atmospheric conditions which greatly affect the size of the hazardous area. The distances change from daytime to nighttime due to different mixing and dispersion conditions in the air. During the night, the air is generally calmer and this causes the material to disperse less and therefore create a toxic zone which is greater than would usually occur during the day. During the day, a more active atmosphere will cause a greater dispersion of the material resulting in a lower concentration of the material in the surrounding air. The actual area where toxic levels are reached will be smaller (due to increased dispersion). In fact, it is the quantity or concentration of the material Vapour that poses problems not its mere presence. The "Initial Isolation Distance" is a distance within which all persons should be considered for evacuation in all directions from the actual spill/leak source. It is a distance (radius) which defines a circle (Initial Isolation Zone) within which persons may be exposed to dangerous concentrations upwind of the source and may be exposed to life threatening concentrations downwind of the source. For example, in the case of Compressed gas, toxic, n.o.s., ID No. 1955, Inhalation Hazard Zone A, the isolation distance for small spills is 100 meters (300 feet), therefore, representing an evacuation circle of 200 meters (600 feet) in diameter. For the same material, the "Protective Action Distance" for a small spill is 0.5 kilometers (0.3 mile) for a daytime incident and 2.2 kilometers (1.4 miles) for a nighttime incident, these distances represent a downwind distance from the spill/leak source within which Protective Actions could be implemented. Protective Actions are those steps taken to preserve the health and safety of emergency responders and the public. People in this area could be evacuated and/or sheltered in-place. For more information, consult pages 285 to 291.

What is a TIH? It is a gas or volatile liquid which is known to be so toxic to humans as to pose a hazard to health during transportation, or in the absence of adequate data on human toxicity, is presumed to be toxic to humans because when tested on laboratory animals it has a Lethal Concentration 50 (LC50) value of not more than 5000 ppm.

It is important to note that even though the term zone is used, the hazard zones do not represent any actual area or distance. The assignment of the zones is strictly a function of their Lethal Concentration 50 (LC50); for example, TIH Zone A is more toxic than Zone D. All distances which are listed in the green-bordered pages are calculated by the use of mathematical models for each TIH material. For the assignment of hazard zones refer to the glossary.

Table 2 lists, by ID number order, materials that produce large amounts of Toxic Inhalation Hazard (TIH) gases when spilled in water and identifies the TIH gases produced. These Water Reactive materials are easily identified in Table 1 as their name is immediately followed by (when spilled in water). Some Water Reactive materials are also TIH materials themselves (e.g., Bromine trifluoride (1746), Thionyl chloride (1836), etc.). In these instances, two entries are provided in Table 1 for land-based and water-based spills. If the Water Reactive material is NOT a TIH and this material is NOT spilled in water, Table 1 and Table 2 do not apply and safety distances will be found within the appropriate orange-bordered guide.

Table 3 provides, by alphabetical order of material name, initial isolation and protective action distances for six Toxic Inhalation Hazard materials that may be more commonly encountered.

The selected materials are:

- Ammonia, anhydrous (UN1005)
- Chlorine (UN1017)
- Ethylene oxide (UN1040)
- Hydrogen chloride (UN1050) and Hydrogen chloride, refrigerated liquid (UN2186)
- Hydrogen fluoride (UN1052)
- Sulfur dioxide/Sulphur dioxide (UN1079)

The table provides Initial Isolation and Protective Action Distances for large spills (more than 208 liters) involving different container types (therefore different volume capacities) for day time and night time situations and different wind speeds.

## ISOLATION AND EVACUATION DISTANCES

Isolation or evacuation distances are shown in the guides (orange-bordered pages) and in the Table 1 - Initial Isolation and Protective Action Distances (green-bordered pages). This may confuse users not thoroughly familiar with ERG2012. It is important to note that some guides refer only to non-TIH materials (36 guides), some refer to both TIH and non-TIH materials (21 guides) and some (5 guides) refer only to TIH or Water-reactive materials (WRM). A guide refers to both TIH and non-TIH materials (for example see GUIDE 131) when the following sentence appears under the title EVACUATIONSpill: "See Table 1 - Initial Isolation and Protective Action Distances for highlighted materials. For non-highlighted materials, increase, in the downwind direction, as necessary, the isolation distance shown under 'PUBLIC SAFETY.'" A guide refers only to TIH or WRM materials (for example see GUIDE 124) when the following sentence appears under the title EVACUATION-Spill: "See Table 1 - Initial Isolation and Protective Action Distances". If the previous sentences do not appear in a guide, then this particular guide refers only to non-TIH materials (for example see GUIDE 128).

In order to identify appropriate isolation and protective action distances, use the following: If you are dealing with a TIH/WRM/Chemical warfare material (highlighted entries in the index lists), the isolation and evacuation distances are found directly in the green-bordered pages. The guides (orange-bordered pages) also remind the user to refer to the green-bordered pages for evacuation specific information involving highlighted materials.

If you are dealing with a non-TIH material but the guide refers to both TIH and non-TIH materials, an immediate isolation distance is provided under the heading PUBLIC SAFETY as a precautionary measure to prevent injuries. It applies to the non-TIH materials only. In addition, for evacuation purposes, the guide informs the user under the title EVACUATIONSpill to increase, for non-highlighted materials, in the downwind direction, if necessary, the immediate isolation distance listed under "PUBLIC SAFETY". For example, GUIDE 131 – Flammable Liquids-Toxic, instructs the user to: "As an immediate precautionary measure, isolate spill or leak area for at least 50 meters (150 feet) in all directions." In case of a large spill, the isolation area could be expanded from 50 meters (150 feet) to a distance deemed as safe by the On-scene commander and emergency responders.

If you are dealing with a non-TIH material and the guide refers only to non-TIH materials, the immediate isolation and evacuation distances are specified as actual distances in the guide (orange-bordered pages) and are not referenced in the green-bordered pages.

Note 1: If an entry is highlighted in green in either the yellow-bordered or blue-bordered pages AND THERE IS NO FIRE, go directly to Table 1 - Initial Isolation and Protective Action Distances (green-bordered pages) and look up the ID number and name of material to obtain initial isolation and protective action distances. IF THERE IS A FIRE, or IF A FIRE IS INVOLVED, ALSO CONSULT the assigned guide (orange-bordered pages) and apply as appropriate the evacuation information shown under PUBLIC SAFETY.

Note 2: If the name in Table 1 is shown with "When Spilled In Water", these materials produce large amounts of Toxic Inhalation Hazard (TIH) gases when spilled in water. Some Water Reactive materials are also TIH materials themselves (e.g., Bromine trifluoride (1746), Thionyl chloride (1836), etc.). In these instances, two entries are provided in Table 1 for land-based and water-based spills. If the Water Reactive material is NOT a TIH and this material is NOT spilled in water, Table 1 and Table 2 do not apply and safety distances will be found within the appropriate orange-bordered guide.

## PROTECTIVE CLOTHING

Street Clothing and Work Uniforms. These garments, such as uniforms worn by police and emergency medical services personnel, provide almost no protection from the harmful effects of dangerous goods.

Structural Fire Fighters' Protective Clothing (SFPC). This category of clothing, often called turnout or bunker gear, means the protective clothing normally worn by fire fighters during structural fire fighting operations. It includes a helmet, coat, pants, boots, gloves and a hood to cover parts of the head not protected by the helmet and facepiece. This clothing must be used with full-facepiece positive pressure self-contained breathing apparatus (SCBA). This protective clothing should, at a minimum, meet the OSHA Fire Brigades Standard (29 CFR 1910.156). Structural fire fighters' protective clothing provides limited protection from heat and cold, but may not provide adequate protection from the harmful Vapours or liquids that are encountered during dangerous goods incidents. Each guide includes a statement about the use of SFPC in incidents involving those materials referenced by that guide. Some guides state that SFPC provides limited protection. In those cases, the responder wearing SFPC and SCBA may be able to perform an expedient, that is quick "in-and-out", operation. However, this type of operation can place the responder at risk of exposure, injury or death. The incident commander makes the decision to perform this operation only if an overriding benefit can be gained (i.e., perform an immediate rescue, turn off a valve to control a leak, etc.). The coverall-type protective clothing customarily worn to fight fires in forests or wildlands is not SFPC and is not recommended nor referred to elsewhere in this guidebook.

Positive Pressure Self-Contained Breathing Apparatus (SCBA). This apparatus provides a constant, positive pressure flow of air within the facepiece, even if one inhales deeply while doing heavy work. Chemical-cartridge respirators or other filtering masks are not acceptable substitutes for positive pressure self-contained breathing apparatus. Demand-type SCBA does not meet the OSHA 29 CFR 1910.156 (f)(1)(i) of the Fire Brigades Standard. If it is suspected that a Chemical Warfare Agent (CW) is involved, the use of NIOSH-certified respirators with CBRN protection are highly recommended.

Chemical Protective Clothing and Equipment. Safe use of this type of protective clothing and equipment requires specific skills developed through training and experience. It is generally not available to, or used by, first responders. This type of special clothing may protect against one chemical, yet be readily permeated by chemicals for which it was not designed. Therefore, protective clothing should not be used unless it is compatible with the released material. This type of special clothing offers little or no protection against heat and/or cold. Examples of this type of equipment have been described as (1) Vapour Protective Suits (NFPA 1991), also known as Totally-Encapsulating Chemical Protective (TECP) Suits or Level A\* protection (OSHA 29 CFR 1910.120, Appendix A & B), and (2) Liquid-Splash

Protective Suits (NFPA 1992 & 1993), also known as Level B\* or C\* protection (OSHA 29 CFR 1910.120, Appendix A & B) or suits for chemical/biological terrorism incidents (NFPA 1994), class 1, 2 or 3 Ensembles and Standard CAN/CGSB/CSA-Z1610-11 – Protection of first responders from chemical, biological, radiological, and nuclear (CBRN) events (2011). No single protective clothing material will protect you from all dangerous goods. Do not assume any protective clothing is resistant to cold and/or heat or flame exposure unless it is so certified by the manufacturer (NFPA 1991 5-3 Flammability Resistance Test and 5-6 Cold Temperature Performance Test).

\* Consult glossary for additional protection levels under the heading “Protective Clothing”.

## FIRE AND SPILL CONTROL

### FIRE CONTROL

Water is the most common and generally most available fire extinguishing agent. Exercise caution in selecting a fire extinguishing method since there are many factors to be considered in an incident. Water may be ineffective in fighting fires involving some materials; its effectiveness depends greatly on the method of application. Fires involving a spill of flammable liquids are generally controlled by applying a fire fighting foam to the surface of the burning material. Fighting flammable liquid fires requires foam concentrate which is chemically compatible with the burning material, correct mixing of the foam concentrate with water and air, and careful application and maintenance of the foam blanket. There are two general types of fire fighting foam: regular and alcohol-resistant. Examples of regular foam are protein-base, fluoroprotein, and aqueous film forming foam (AFFF). Some flammable liquids, including many petroleum products, can be controlled by applying regular foam. Other flammable liquids, including polar solvents (flammable liquids which are water soluble) such as alcohols and ketones, have different chemical properties. A fire involving these materials cannot be easily controlled with regular foam and requires application of alcohol-resistant foam. Polar-solvent fires may be difficult to control and require a higher foam application rate than other flammable liquid fires (see NFPA/ANSI Standards 11 and 11A for further information). Refer to the appropriate guide to determine which type of foam is recommended. Although it is impossible to make specific recommendations for flammable liquids which have subsidiary corrosive or toxic hazards, alcohol-resistant foam may be effective for many of these materials. The emergency response telephone number on the shipping document, or the appropriate emergency response agency, should be contacted as soon as possible for guidance on the proper fire extinguishing agent to use. The final selection of the agent and method depends on many factors such as incident location, exposure hazards, size of the fire, environmental concerns, as well as the availability of extinguishing agents and equipment at the scene.

### WATER REACTIVE MATERIALS

Water is sometimes used to flush spills and to reduce or direct Vapours in spill situations. Some of the materials covered by the guidebook can react violently or even explosively with water. In these cases, consider letting the fire burn or leaving the spill alone (except to prevent its spreading by diking) until additional technical advice can be obtained. The applicable guides clearly warn you of these potentially dangerous reactions. These materials require technical advice since

- (1) water getting inside a ruptured or leaking container may cause an explosion;
- (2) water may be needed to cool adjoining containers to prevent their rupturing (exploding) or further spread of the fires;



- (3) water may be effective in mitigating an incident involving a water-reactive material only if it can be applied at a sufficient flooding rate for an extended period; and
- (4) the products from the reaction with water may be more toxic, corrosive, or otherwise more undesirable than the product of the fire without water applied.

When responding to an incident involving water-reactive materials, take into account the existing conditions such as wind, precipitation, location and accessibility to the incident, as well as the availability of the agents to control the fire or spill. Because there are variables to consider, the decision to use water on fires or spills involving water-reactive materials should be based on information from an authoritative source; for example, a producer of the material, who can be contacted through the emergency response telephone number or the appropriate emergency response agency.

#### Vapour CONTROL

Limiting the amount of Vapour released from a pool of flammable or corrosive liquids is an operational concern. It requires the use of proper protective clothing, specialized equipment, appropriate chemical agents, and skilled personnel. Before engaging in Vapour control, get advice from an authoritative source as to the proper tactics.

There are several ways to minimize the amount of Vapours escaping from pools of spilled liquids, such as special foams, adsorbing agents, absorbing agents, and neutralizing agents. To be effective, these Vapour control methods must be selected for the specific material involved and performed in a manner that will mitigate, not worsen, the incident.

Where specific materials are known, such as at manufacturing or storage facilities, it is desirable for the dangerous goods response team to prearrange with the facility operators to select and stockpile these control agents in advance of a spill. In the field, first responders may not have the most effective Vapour control agent for the material available. They are likely to have only water and only one type of fire fighting foam on their vehicles. If the available foam is inappropriate for use, they are likely to use water spray. Because the water is being used to form a Vapour seal, care must be taken not to churn or further spread the spill during application. Vapours that do not react with water may be directed away from the site using the air currents surrounding the water spray. Before using water spray or other methods to safely control Vapour emission or to suppress ignition, obtain technical advice, based on specific chemical name identification.

#### BLEVE (Boiling Liquid Expanding Vapour Explosion)

The following section presents, in a two-page format, background information on BLEVEs and includes a chart that provides important safety-related information to consider when confronted with this type of situation involving Liquefied Petroleum Gases (LPG), UN1075. LPGs include the following flammable gases; Butane, UN1011; Butylene, UN1012; Isobutylene, UN1055; Propylene, UN2077; Isobutane, UN1969; and Propane, UN1978.

What are the main hazards from a BLEVE?

The main hazards from a propane or LPG BLEVE are:

- fire
- thermal radiation from the fire
- blast
- projectiles

The danger from these decreases as you move away from the BLEVE centre. The furthest reaching hazard is projectiles.

This information was prepared for Transport Canada, the Canadian Association of Fire Chiefs and the Propane Gas Association of Canada Inc. by Dr. A. M. Birk, Queen's University, Kingston (Ontario) Canada.

For a free download or to order a DVD of the video BLEVE Response and Prevention, please visit <<http://www.tc.gc.ca/eng/tdg/bleve-1119.htm>> or contact us at 1-888-830-4911, or by Email: [MPS@tc.gc.ca](mailto:MPS@tc.gc.ca).

To download a free copy, first click on the green "View/Download" button and then left-click the video link to view the video or right-click to download a copy by selecting "Save target as" to save to your computer.

## BLEVE – SAFETY PRECAUTIONS

Use with caution. The following table gives a summary of tank properties, critical times, critical distances and cooling water flow rates for various tank sizes. This table is provided to give responders some guidance but it should be used with caution.

Tank dimensions are approximate and can vary depending on the tank design and application.

Minimum time to failure is based on *severe torch fire impingement* on the vapour space of a tank in good condition, and is approximate. Tanks may fail earlier if they are damaged or corroded. Tanks may fail minutes or hours later than these minimum times depending on the conditions. It has been assumed here that the tanks are not equipped with thermal barriers or water spray cooling.

Minimum time to empty is based on an engulfing fire with a properly sized pressure relief valve. If the tank is only partially engulfed then time to empty will increase (i.e., if tank is 50% engulfed then the tanks will take twice as long to empty). Once again, it has been assumed that the tank is not equipped with a thermal barrier or water spray.

Tanks equipped with thermal barriers or water spray cooling significantly increase the times to failure and the times to empty. A thermal barrier can reduce the heat input to a tank by a factor of ten or more. This means it could take ten times as long to empty the tank through the Pressure Relief Valve (PRV).

Fireball radius and emergency response distance is based on mathematical equations and is approximate. They assume spherical fireballs and this is not always the case.

Two safety distances for public evacuation. The minimum distance is based on tanks that are launched with a small elevation angle (i.e., a few degrees above horizontal). This is most common for horizontal cylinders. The preferred evacuation distance has more margin of safety since it assumes the tanks are launched at a 45 degree angle to the horizontal. This might be more appropriate if a vertical cylinder is involved. It is understood that these distances are very large and may not be practical in a highly populated area. However, it should be understood that the risks increase rapidly the closer you are to a BLEVE. Keep in mind that the furthest reaching projectiles tend to come off in the zones 45 degrees on each side of the tank ends.

Water flow rate is based on  $5 \sqrt{\text{capacity (USgal)}} = \text{usgal/min}$  needed to cool tank metal.

Warning: the data given are approximate and should only be used with extreme caution. For example, where times are given for tank failure or tank emptying through the pressure relief valve – these times are typical but they can vary from situation to situation. Therefore, never risk life based on these times.

BLEVE (USE WITH CAUTION)										
Capacity	Diameter	Length	Propane Mass	Minimum time to failure for severe torch	Approximate time to empty for engulfing fire	Fireball radius	Emergency response distance	Minimum evacuation distance	Preferred evacuation distance	Cooling water flow rate
Litres (Gallons)	Meters (Feet)	Meters (Feet)	Kilograms (Lbs)	Minutes	Minutes	Meters (Feet)	Meters (Feet)	Meters (Feet)	Meters (Feet)	Litres/min USgal/min
100 (38.6)	0.3 (1)	1.5 (4.9)	40 (88)	4	8	10 (33)	90 (295)	154 (505)	307 (1007)	94.6 25
400 (154.4)	0.61 (2)	1.5 (4.9)	160 (353)	4	12	16 (53)	90 (295)	244 (801)	488 (1601)	189.3 50
2000 (772)	0.96 (3.2)	3 (9.8)	800 (1764)	5	18	28 (92)	111 (364)	417 (1368)	834 (2736)	424 112
4000 (1544)	1 (3.3)	4.9 (16.1)	1600 (3527)	5	20	35 (115)	140 (459)	525 (1722)	1050 (3445)	598 158
8000 (3088)	1.25 (4.1)	6.5 (21.3)	3200 (7055)	6	22	44 (144)	176 (577)	661 (2169)	1323 (4341)	848 224
22000 (8492)	2.1 (6.9)	6.7 (22)	8800 (19400)	7	28	62 (203)	247 (810)	926 (3038)	1852 (6076)	1404 371
42000 (16212)	2.1 (6.9)	11.8 (38.7)	16800 (37037)	7	32	77 (253)	306 (1004)	1149 (3770)	2200 (7218)	1938 512
82000 (31652)	2.75 (9)	13.7 (45)	32800 (72310)	8	40	96 (315)	383 (1257)	1435 (4708)	2200 (7218)	2710 716
140000 (54040)	3.3 (10.8)	17.2 (56.4)	56000 (123457)	9	45	114 (374)	457 (1499)	1715 (5627)	2200 (7218)	3539 935

CRIMINAL/TERRORIST USE OF CHEMICAL/BIOLOGICAL/RADIOLOGICAL AGENTS

The following is intended to supply information to first responders for use in making a preliminary assessment of a situation that they suspect involves criminal/terrorist use of chemical, biological agents and/or radioactive materials (CBRN). To aid in the assessment, a list of observable indicators of the use and/or presence of a CB agent or radioactive material is provided in the following paragraphs. This section ends with a Safe Standoff Distance Chart for various threats when Improvised Explosive Devices are involved.

DIFFERENCES BETWEEN A CHEMICAL, BIOLOGICAL AND RADIOLOGICAL AGENT

Chemical and biological agents as well as radioactive materials can be dispersed in the air we breathe, the water we drink, or on surfaces we physically contact. Dispersion methods may be as simple as opening a container, using conventional (garden) spray devices, or as elaborate as detonating an improvised explosive device.

Chemical Incidents are characterized by the rapid onset of medical symptoms (minutes to hours) and easily observed signatures (colored residue, dead foliage, pungent odor, dead insects and animals).

Biological Incidents are characterized by the onset of symptoms in hours to days. Typically, there will be no characteristic signatures because biological agents are usually odorless and colorless. Because of the delayed onset of symptoms in a biological incident, the area affected may be greater due to the movement of infected individuals.

Radiological Incidents are characterized by the onset of symptoms, if any, in days to weeks or longer. Typically, there will be no characteristic signatures because radioactive materials are usually odorless and colorless. Specialized equipment is required to determine the size of the affected area, and whether the level of radioactivity presents an immediate or longterm health hazard. Because radioactivity is not detectable without special equipment, the affected area may be greater due to the migration of contaminated individuals.

At the levels created by most probable sources, not enough radiation would be generated to kill people or cause severe illness. In a radiological incident generated by a "dirty bomb", or Radiological Dispersal Device (RDD), in which a conventional explosive is detonated to spread radioactive contamination, the primary hazard is from the explosion. However, certain radioactive materials dispersed in the air could contaminate up to several city blocks, creating fear and possibly panic, and requiring potentially costly cleanup.

INDICATORS OF A POSSIBLE CHEMICAL INCIDENT

Dead animals/birds/fish	Not just an occasional road kill, but numerous animals (wild and domestic, small and large), birds, and fish in the same area.
Lack of insect life	If normal insect activity (ground, air, and/or water) is missing, check the ground/water surface/shore line for dead insects. If near water, check for dead fish/aquatic birds.

INDICATORS OF A POSSIBLE CHEMICAL INCIDENT (Continued)

Unexplained odors	Smells may range from fruity to flowery to sharp/pungent to garlic/ horseradish-like to bitter almonds/peach kernels to new mown hay. It is important to note that the particular odor is completely out of character with its surroundings.
Unusual numbers of dying or sick people (mass casualties)	Health problems including nausea, disorientation, difficulty in breathing, convulsions, localized sweating, conjunctivitis (reddening of eyes/nerve agent symptoms), erythema (reddening of skin/vesicant symptoms) and death.
Pattern of casualties	Casualties will likely be distributed downwind, or if indoors, by the air ventilation system.
Blisters/rashes	Numerous individuals experiencing unexplained water-like blisters, weals (like bee stings), and/or rashes.
Illness in confined area	Different casualty rates for people working indoors versus outdoors dependent on where the agent was released.
Unusual liquid droplets	Numerous surfaces exhibit oily droplets/film; numerous water surfaces have an oily film. (No recent rain.)
Different looking areas	Not just a patch of dead weeds, but trees, shrubs, bushes, food crops, and/or lawns that are dead, discolored, or withered. (No current drought.)
Low-lying clouds	Low-lying cloud/fog-like condition that is not consistent with its surroundings.
Unusual metal debris	Unexplained bomb/munitions-like material, especially if it contains a liquid.

INDICATORS OF A POSSIBLE BIOLOGICAL INCIDENT

Unusual numbers of sick or dying people or animals	Any number of symptoms may occur. Casualties may occur hours to days after an incident has occurred. The time required before symptoms are observed is dependent on the agent used.
Unscheduled and unusual spray being disseminated	Especially if outdoors during periods of darkness.
Abandoned spray devices	Devices may not have distinct odors.

INDICATORS OF A POSSIBLE RADIOLOGICAL INCIDENT

Radiation Symbols	Containers may display a "propeller" radiation symbol.
Unusual metal debris	Unexplained bomb/munitions-like material.

## INDICATORS OF A POSSIBLE RADIOLOGICAL INCIDENT (continued)

Heat-emitting material	Material that is hot or seems to emit heat without any sign of an external heat source.
Glowing material	Strongly radioactive material may emit or cause radioluminescence.
Sick people/animals	In very improbable scenarios there may be unusual numbers of sick or dying people or animals. Casualties may occur hours to days or weeks after an incident has occurred. The time required before symptoms are observed is dependent on the radioactive material used, and the dose received. Possible symptoms include skin reddening or vomiting.

## PERSONAL SAFETY CONSIDERATIONS

When approaching a scene that may involve CB agents or radioactive materials, the most critical consideration is the safety of oneself and other responders. Protective clothing and respiratory protection of appropriate level of safety must be used. In incidents where it is suspected that CBRN materials have been used as weapons, NIOSH-certified respirators with CBRN protection are highly recommended. Be aware that the presence and identification of CB agents or radioactive materials may not be verifiable, especially in the case of biological or radiological agents. The following actions/measures to be considered are applicable to either a chemical, biological or radiological incident. The guidance is general in nature, not all encompassing, and its applicability should be evaluated on a case-by-case basis.

Approach and response strategies. Protect yourself and use a safe approach (minimize any exposure time, maximize the distance between you and the item that is likely to harm you, use cover as protection and wear appropriate personal protective equipment and respiratory protection). Identify and estimate the hazard by using indicators as provided above. Isolate the area and secure the scene; potentially contaminated people should be isolated and decontaminated as soon as possible. To the extent possible, take measures to limit the spread of contamination. In the event of a chemical incident, the fading of chemical odors is not necessarily an indication of reduced Vapour concentrations. Some chemicals deaden the senses giving the false perception that the chemical is no longer present.

If there is any indication that an area may be contaminated with radioactive materials, including the site of any non-accidental explosion, responder personnel should be equipped with radiation detection equipment that would alert them if they are entering a radiologically compromised environment, and should have received adequate training in its use. This equipment should be designed in such a way that it can also alert the responders when an unacceptable ambient dose rate or ambient dose has been reached.

## Initial actions to consider in a potential CBRN/Hazmat Terrorism Event:

- Avoid using cell phones, radios, etc. within 100 meters (300 feet) of a suspect device
- NOTIFY your local police by calling 108/100.
- Set up Incident command upwind and uphill of the area.
- Do NOT touch or move suspicious packages/containers.
- Be cautious regarding potential presence of secondary devices (e.g. Improvised Explosive Devices, IEDs).
- Avoid contamination.
- Limit access to only those responsible for rescue of victims or assessment of unknown materials or devices.
- Evacuate and isolate individuals potentially exposed to dangerous goods/hazardous materials.
- Isolate contaminated areas and secure the scene for analysis of material.

Decontamination measures. Emergency responders should follow standard decontamination procedures (flush-strip-flush). Mass casualty decontamination should begin as soon as possible by stripping (all clothing) and flushing (soap and water). If biological agents are involved or suspected, careful washing and use of a brush are more effective. If chemical agents are suspected, the most important and effective decontamination will be the one done within the first one or two minutes. If possible, further decontamination should be performed using a 0.5% hypochlorite solution (1 part household bleach mixed with 9 parts water). If biological agents are suspected, a contact time of 10 to 15 minutes should be allowed before rinsing. The solution can be used on soft tissue wounds, but must not be used in eyes or open wounds of the abdomen, chest, head, or spine. For further information contact the agencies listed in this guidebook.

For persons contaminated with radioactive material, remove them to a low radiation area if necessary. Remove their clothing and place it in a clearly marked sealed receptacle, such as a plastic bag, for later testing. Use decontamination methods described above, but avoid breaking the skin, e.g., from shaving, or overly vigorous brushing. External radiological contamination on intact skin surface rarely causes a high enough dose to be a hazard to either the contaminated person or the first responders. For this reason, except in very unusual circumstances, an injured person who is also radiologically contaminated should be medically stabilized, taking care to minimize the spread of the contamination to the extent possible, before decontamination measures are initiated.

Note : The above information was developed in part by the Department of National Defence (Canada), the U.S. Department of the Army, Aberdeen Proving Ground and the Federal Bureau of Investigation (FBI).

**Improvised Explosive Device (IED)  
SAFE STAND OFF DISTANCE**

	Threat Description	Explosives Mass (TNT equivalent) <sup>1</sup>		Building Evacuation Distance <sup>2</sup>		Outdoor Evacuation Distance <sup>3</sup>	
High Explosives (TNT Equivalent)	Pipe Bomb	5 lbs	2.3 kg	70 ft	21 m	850 ft	259 m
	Suicide Belt	10 lbs	4.5 kg	90 ft	27 m	1,080 ft	330 m
	Suicide Vest	20 lbs	9 kg	110 ft	34 m	1,360 ft	415 m
	Briefcase/Suitcase Bomb	50 lbs	23 kg	150 ft	46 m	1,850 ft	564 m
	Compact Sedan	500 lbs	227 kg	320 ft	98 m	1,500 ft	457 m
	Sedan	1,000 lbs	454 kg	400 ft	122 m	1,750 ft	534 m
	Passenger/Cargo Van	4,000 lbs	1 814 kg	640 ft	195 m	2,750 ft	838 m
	Small Moving Van/ Delivery Truck	10,000 lbs	4 536 kg	860 ft	263 m	3,750 ft	1 143 m
	Moving Van/Water Truck	30,000 lbs	13 608 kg	1,240 ft	375 m	6,500 ft	1 982 m
	Semitrailer	60,000 lbs	27 216 kg	1,570 ft	475 m	7,000 ft	2 134 m

	Threat Description	LPG Mass/ Volume <sup>1</sup>		Fireball Diameter <sup>4</sup>		Safe Distance <sup>5</sup>	
Liquefied Petroleum Gas (LPG - Butane or Propane)	Small LPG Tank	20 lbs/5 gal	9 kg/19 L	40 ft	12 m	160 ft	48 m
	Large LPG Tank	100 lbs/25 gal	45 kg/95 L	69 ft	21 m	276 ft	84 m
	Commercial/ Residential LPG Tank	2,000 lbs/500 gal	907 kg/1 893 L	184 ft	56 m	736 ft	224 m
	Small LPG Truck	8,000 lbs/2,000 gal	3 630 kg/7 570 L	292 ft	89 m	1,168 ft	356 m
	Semitanker LPG	40,000 lbs/10,000 gal	18 144 kg/37 850 L	499 ft	152 m	1,996 ft	608 m

1 Based on the maximum amount of material that could reasonably fit into a container or vehicle. Variations possible.

2 Governed by the ability of an unreinforced building to withstand severe damage or collapse.

3 Governed by the greater of fragment throw distance or glass breakage/falling glass hazard distance. These distances can be reduced for personnel wearing ballistic protection. Note that the pipe bomb, suicide belt/vest, and briefcase/ suitcase bomb are assumed to have a fragmentation characteristic that requires greater standoff distances than an equal amount of explosives in a vehicle.

4 Assuming efficient mixing of the flammable gas with ambient air.

5 Determined by U.S. firefighting practices wherein safe distances are approximately 4 times the flame height. Note that an LPG tank filled with high explosives would require a significantly greater standoff distance than if it were filled with LPG.

NOTES

## Glossary

AEGL(s)	Acute Exposure Guideline Level(s), AEGLs represent threshold exposure limits for the general public after a once-in-a-lifetime, or rare, exposure and are applicable to emergency exposure periods ranging from 10 minutes to 8 hours. Three levels AEGL-1, AEGL-2 and AEGL-3 are developed for each of five exposure periods (10 and 30 minutes, 1 hour, 4 hours, and 8 hours) and are distinguished by varying degrees of severity of toxic effects; see AEGL-1, AEGL-2 and AEGL-3.
AEGL-1	AEGL-1 is the airborne concentration (expressed as parts per million or milligrams per cubic meter [ppm or mg/m <sup>3</sup> ]) of a substance above which it is predicted that the general population, including susceptible individuals, could experience notable discomfort, irritation, or certain asymptomatic, non-sensory effects. However, the effects are not disabling and are transient and reversible upon cessation of exposure.
AEGL-2	AEGL-2 is the airborne concentration (expressed as ppm or mg/m <sup>3</sup> ) of a substance above which it is predicted that the general population, including susceptible individuals, could experience irreversible or other serious, long-lasting adverse health effects or an impaired ability to escape.
AEGL-3	AEGL-3 is the airborne concentration (expressed as ppm or mg/m <sup>3</sup> ) of a substance above which it is predicted that the general population, including susceptible individuals, could experience life-threatening health effects or death.
Alcohol resistant foam	A foam that is resistant to "polar" chemicals such as ketones and esters which may break down other types of foam. Biological agents Living organisms that cause disease, sickness and mortality in humans. Anthrax and Ebola are examples of biological agents. Refer to GUIDE 158.
Blister agents (vesicants)	Substances that cause blistering of the skin. Exposure is through liquid or Vapour contact with any exposed tissue (eyes, skin, lungs). Mustard (H), Distilled Mustard (HD), Nitrogen Mustard (HN) and Lewisite (L) are blister agents. Symptoms: Red eyes, skin irritation, burning of skin, blisters, upper respiratory damage, cough, hoarseness.

## Glossary

Blood agents	Substances that injure a person by interfering with cell respiration (the exchange of oxygen and carbon dioxide between blood and tissues). Hydrogen cyanide (AC) and Cyanogen chloride (CK) are blood agents.  Symptoms: Respiratory distress, headache, unresponsiveness, seizures, coma.
Burn	Refers to either a chemical or thermal burn, the former may be caused by corrosive substances and the latter by liquefied cryogenic gases, hot molten substances, or flames.
CBRN	Chemical, biological, radiological or nuclear warfare agent.
Choking agents	Substances that cause physical injury to the lungs. Exposure is through inhalation. In extreme cases, membranes swell and lungs become filled with liquid (pulmonary edema). Death results from lack of oxygen; hence, the victim is "choked". Phosgene (CG) is a choking agent.  Symptoms: Irritation to eyes/nose/throat, respiratory distress, nausea and vomiting, burning of exposed skin.
CO <sub>2</sub>	Carbon dioxide gas.
Cold zone	Area where the command post and support functions that are necessary to control the incident are located. This is also referred to as the clean zone, green zone or support zone in other documents. (EPA Standard Operating Safety Guidelines, OSHA 29 CFR 1910.120, NFPA 472)
Combustible liquid	Liquids which have a flash point greater than 60oC (140oF) and below 93oC (200oF). U.S. regulations permit a flammable liquid with a flash point between 38oC (100oF) and 60oC (140oF) to be reclassified as a combustible liquid.
Compatibility Group	Letters identify explosives that are deemed to be compatible. The definition of these Compatibility Groups in this Glossary are intended to be descriptive. Please consult the transportation of dangerous goods/hazardous materials or explosives regulations of your jurisdiction for the exact wording of the definitions. Class 1 materials are considered to be "compatible" if they can be transported together without significantly increasing either the probability of an incident or, for a given quantity, the magnitude of the effects of such an incident.  A Substances which are expected to mass detonate very soon after fire reaches them.



## Glossary

- B Articles which are expected to mass detonate very soon after fire reaches them.
- C Substances or articles which may be readily ignited and burn violently without necessarily exploding.
- D Substances or articles which may mass detonate (with blast and/or fragment hazard) when exposed to fire.
- E&F Articles which may mass detonate in a fire.
- G Substances and articles which may mass explode and give off smoke or toxic gases.
- H Articles which in a fire may eject hazardous projectiles and dense white smoke.
- J Articles which may mass explode.
- K Articles which in a fire may eject hazardous projectiles and toxic gases.
- L Substances and articles which present a special risk and could be activated by exposure to air or water.
- N Articles which contain only extremely insensitive detonating substances and demonstrate a negligible probability of accidental ignition or propagation.
- S Packaged substances or articles which, if accidentally initiated, produce effects that are usually confined to the immediate vicinity.

Control zones	Designated areas at dangerous goods incidents, based on safety and the degree of hazard. Many terms are used to describe control zones; however, in this guidebook, these zones are defined as the hot/exclusion/red/restricted zone, warm/contamination reduction/yellow/limited access zone, and cold/support/green/clean zone. (EPA Standard Operating Safety Guidelines, OSHA 29 CFR 1910.120, NFPA 472)
Cryogenic liquid	A refrigerated, liquefied gas that has a boiling point colder than -90oC (-130oF) at atmospheric pressure.
Dangerous Water	Produces significant toxic gas when it comes in contact with
Reactive Material	water.
Decomposition products	Products of a chemical or thermal break-down of a substance.

## Glossary

Decontamination	The removal of dangerous goods from personnel and equipment to the extent necessary to prevent potential adverse health effects. Always avoid direct or indirect contact with dangerous goods; however, if contact occurs, personnel should be decontaminated as soon as possible. Since the methods used to decontaminate personnel and equipment differ from one chemical to another, contact the chemical manufacturer, through the agencies listed on the inside back cover, to determine the appropriate procedure. Contaminated clothing and equipment should be removed after use and stored in a controlled area (warm/contamination reduction/yellow/limited access zone) until cleanup procedures can be initiated. In some cases, protective clothing and equipment cannot be decontaminated and must be disposed of in a proper manner.
Drychemical	A preparation designed for fighting fires involving flammable liquids, pyrophoric substances and electrical equipment. Common types contain sodium bicarbonate or potassium bicarbonate.
Edema	The accumulation of an excessive amount of watery fluid in cells and tissues. Pulmonary edema is an excessive buildup of water in the lungs, for instance, after inhalation of a gas that is corrosive to lung tissue.
ERPG(s)	Emergency Response Planning Guideline(s). Values intended to provide estimates of concentration ranges above which one could reasonably anticipate observing adverse health effects; see ERPG-1, ERPG-2 and ERPG-3.
ERPG-1	The maximum airborne concentration below which it is believed nearly all individuals could be exposed for up to 1 hour without experiencing more than mild, transient adverse health effects or without perceiving a clearly defined objectionable odor.
ERPG-2	The maximum airborne concentration below which it is believed nearly all individuals could be exposed for up to 1 hour without experiencing or developing irreversible or other serious health effects or symptoms that could impair an individual's ability to take protective action.
ERPG-3	The maximum airborne concentration below which it is believed nearly all individuals could be exposed for up to 1 hour without experiencing or developing life-threatening health effects.
Flammable liquid	A liquid that has a flash point of 60oC (140oF) or lower.

## Glossary

Flash point	Lowest temperature at which a liquid or solid gives off Vapour in such a concentration that, when the Vapour combines with air near the surface of the liquid or solid, a flammable mixture is formed. Hence, the lower the flash point, the more flammable the material.
Hazard zones (Inhalation Hazard Zones)	<p>HAZARD ZONE A: Gases: LC50 of less than or equal to 200 ppm, Liquids: V equal to or greater than 500 LC50 and LC50 less than or equal to 200 ppm,</p> <p>HAZARD ZONE B: Gases: LC50 greater than 200 ppm and less than or equal to 1000 ppm, Liquids: V equal to or greater than 10 LC50; LC50 less than or equal to 1000 ppm and criteria for Hazard Zone A are not met.</p> <p>HAZARD ZONE C: LC50 greater than 1000 ppm and less than or equal to 3000 ppm,</p> <p>HAZARD ZONE D: LC50 greater than 3000 ppm and less than or equal to 5000 ppm.</p>
Hot zone	Area immediately surrounding a dangerous goods incident which extends far enough to prevent adverse effects from released dangerous goods to personnel outside the zone. This zone is also referred to as exclusion zone, red zone or restricted zone in other documents. (EPA Standard Operating Safety Guidelines, OSHA 29 CFR 1910.120, NFPA 472)
IED	See "Improvised Explosive Device".
Immiscible	In this guidebook, means that a material does not mix readily with water.
Improvised Explosive Device	A bomb that is manufactured from commercial, military or homemade explosives.
Large spill	A spill that involves quantities that are greater than 208 liters for liquids and greater than 300 kilograms (660 pounds) for solids.
Lc50	Lethal concentration 50. The concentration of a material administered by inhalation that is expected to cause the death of 50% of an experimental animal population within a specified time. (Concentration is reported in either ppm or mg/m3)

## Glossary

Mass explosion	Explosion which affects almost the entire load virtually instantaneously.
mg/m3	Milligrams of a material per cubic meter of air.
Miscible	In this guidebook, means that a material mixes readily with water.
mL/m3	Milliliters of a material per cubic meter of air. (1 mL/m3 equals 1 ppm)
Nerve agents	Substances that interfere with the central nervous system. Exposure is primarily through contact with the liquid (via skin and eyes) and secondarily through inhalation of the Vapour. Tabun (GA), Sarin (GB), Soman (GD) and VX are nerve agents.  Symptoms: Pinpoint pupils, extreme headache, severe tightness in the chest, dyspnea, runny nose, coughing, salivation, unresponsiveness, seizures.
Non-polar	See "Immiscible".
n.o.s.	These letters refer to "not otherwise specified". The entries which use this description are generic names such as "Corrosive liquid, n.o.s." This means that the actual chemical name for that corrosive liquid is not listed in the regulations; therefore, a generic name must be used to describe it on shipping papers.
Noxious	In this guidebook, means that a material may be harmful or injurious to health or physical well-being.
Oxidizer	A chemical which supplies its own oxygen and which helps other combustible material burn more readily.
P	The letter (P) following a guide number in the yellow-bordered and blue-bordered pages identifies a material which may polymerize violently under high temperature conditions or contamination with other products. It is used to identify materials that have a strong potential for polymerization in the absence of an inhibitor or due to the inhibitor depletion caused by the accident conditions. This polymerization will produce heat and high pressure buildup in containers which may explode or rupture. (See polymerization below)
Packing Group	<p>The Packing Group (PG) is assigned based on the degree of danger presented by the hazardous material:</p> <p>PG I : Great danger</p> <p>PG II : Medium danger</p> <p>PG III : Minor danger</p>

## Glossary

PG	See Packing Group								
pH	pH is a value that represents the acidity or alkalinity of a water solution. Pure water has a pH of 7. A pH value below 7 indicates an acid solution (a pH of 1 is extremely acidic). A pH above 7 indicates an alkaline solution (a pH of 14 is extremely alkaline). Acids and alkalies (bases) are commonly referred to as corrosive materials.								
PIH	Poison Inhalation Hazard. Term used to describe gases and volatile liquids that are toxic when inhaled. (Same as TIH)								
Polar	See "Miscible".								
Polymerization	This term describes a chemical reaction which is generally associated with the production of plastic substances. Basically, the individual molecules of the chemical (liquid or gas) react with each other to produce what can be described as a long chain. These chains can be formed in many useful applications. A well known example is the styrofoam (polystyrene) coffee cup which is formed when liquid molecules of styrene react with each other or polymerize forming a solid, therefore changing the name from styrene to polystyrene (poly means many).								
ppm	Parts per million. (1 ppm equals 1 mL/m <sup>3</sup> )								
Protective clothing	Includes both respiratory and physical protection. One cannot assign a level of protection to clothing or respiratory devices separately. These levels were accepted and defined by response organizations such as U.S. Coast Guard, NIOSH, and U.S. EPA. <table border="0" style="margin-left: 20px;"> <tr> <td>Level A:</td><td>SCBA plus totally encapsulating chemical resistant clothing (permeation resistant).</td></tr> <tr> <td>Level B:</td><td>SCBA plus hooded chemical resistant clothing (splash suit).</td></tr> <tr> <td>Level C:</td><td>Full or half-face respirator plus hooded chemical resistant clothing (splash suit).</td></tr> <tr> <td>Level D:</td><td>Coverall with no respiratory protection.</td></tr> </table>	Level A:	SCBA plus totally encapsulating chemical resistant clothing (permeation resistant).	Level B:	SCBA plus hooded chemical resistant clothing (splash suit).	Level C:	Full or half-face respirator plus hooded chemical resistant clothing (splash suit).	Level D:	Coverall with no respiratory protection.
Level A:	SCBA plus totally encapsulating chemical resistant clothing (permeation resistant).								
Level B:	SCBA plus hooded chemical resistant clothing (splash suit).								
Level C:	Full or half-face respirator plus hooded chemical resistant clothing (splash suit).								
Level D:	Coverall with no respiratory protection.								
Pyrophoric	A material which ignites spontaneously upon exposure to air (or oxygen).								

## Glossary

Radiation Authority	As referred to in GUIDES 161 through 166 for radioactive materials, the Radiation Authority is either a Federal, state/provincial agency or state/province designated official. The responsibilities of this authority include evaluating radiological hazard conditions during normal operations and during emergencies. If the identity and telephone number of the authority are not known by emergency responders, or included in the local response plan, the information can be obtained from the agencies listed on the inside back cover. They maintain a periodically updated list of radiation authorities.
Radioactivity	The property of some substances to emit invisible and potentially harmful radiation.
Refrigerated liquid	See "Cryogenic liquid".
Small spill	A spill that involves quantities that are less than 208 liters for liquids and less than 300 kilograms (660 pounds) for solids.
Straight (solid) stream	Method used to apply or distribute water from the end of a hose. The water is delivered under pressure for penetration. In an efficient straight (solid) stream, approximately 90% of the water passes through an imaginary circle 38 cm (15 inches) in diameter at the breaking point. Hose (solid or straight) streams are frequently used to cool tanks and other equipment exposed to flammable liquid fires, or for washing burning spills away from danger points. However, straight streams will cause a spill fire to spread if improperly used or when directed into open containers of flammable and combustible liquids.
TIH	Toxic Inhalation Hazard. Term used to describe gases and volatile liquids that are toxic when inhaled. (Same as PIH)
V	Saturated Vapour concentration in air of a material in mL/m <sup>3</sup> (volatility) at 20°C and standard atmospheric pressure.
Vapour density	Weight of a volume of pure Vapour or gas (with no air present) compared to the weight of an equal volume of dry air at the same temperature and pressure. A Vapour density less than 1 (one) indicates that the Vapour is lighter than air and will tend to rise. A Vapour density greater than 1 (one) indicates that the Vapour is heavier than air and may travel along the ground.
Vapour pressure	Pressure at which a liquid and its Vapour are in equilibrium at a given temperature. Liquids with high Vapour pressures evaporate rapidly.

## Glossary

**Viscosity** Measure of a liquid's internal resistance to flow. This property is important because it indicates how fast a material will leak out through holes in containers or tanks.

**Warm zone** Area between Hot and Cold zones where personnel and equipment decontamination and hot zone support take place. It includes control points for the access corridor and thus assists in reducing the spread of contamination. Also referred to as the contamination reduction corridor (CRC), contamination reduction zone (CRZ), yellow zone or limited access zone in other documents. (EPA Standard Operating Safety Guidelines, OSHA 29 CFR 1910.120, NFPA 472)

**Water-sensitive** Substances which may produce flammable and/or toxic decomposition products upon contact with water.

**Water spray (fog)** Method or way to apply or distribute water. The water is finely divided to provide for high heat absorption. Water spray patterns can range from about 10 to 90 degrees. Water spray streams can be used to extinguish or control the burning of a fire or to provide exposure protection for personnel, equipment, buildings, etc. (This method can be used to absorb Vapours, knockdown Vapours or disperse Vapours. Direct a water spray (fog), rather than a straight (solid) stream, into the Vapour cloud to accomplish any of the above).

Water spray is particularly effective on fires of flammable liquids and volatile solids having flash points above 37.8oC (100oF).

Regardless of the above, water spray can be used successfully on flammable liquids with low flash points. The effectiveness depends particularly on the method of application. With proper nozzles, even gasoline spill fires of some types have been extinguished when coordinated hose lines were used to sweep the flames off the surface of the liquid. Furthermore, water spray carefully applied has frequently been used with success in extinguishing fires involving flammable liquids with high flash points (or any viscous liquids) by causing frothing to occur only on the surface, and this foaming action blankets and extinguishes the fire.

The Emergency Response Guidebook is normally revised and reissued regularly. However, in the event of a significant mistake, omission or change in the state of knowledge, special instructions to change the guidebook (in pen-and-ink, with paste-over stickers, or with a supplement) may be issued.

Users of this guidebook should check periodically to make sure their version is current. Changes should be annotated below. Contact:

GSDMA  
<http://gsdma.org/>

This guidebook incorporates changes dated:

---

---

---

## Emergency Response Telephone Numbers

Agency	Phone No.	Fax No.
Emergency Services (Medical, Police & Fire)	108	
Police	100	
Fire & Emergency Services	101	
District Emergency Operation Centre	(Dist. Code) + 1077 (from landline)	
State Emergency Operation Centre Block No. 2, Ground Floor, Sachivalaya Gandhinagar.	(079) 1070 (from landline) (079) 23251900 (079) 23251902	(079) 23251912 (079) 23251916
Regional Emergency Response Centre (Ahmedabad)	(079) 22148598 (079) 22148465 9327038754	(079) 22148598
Regional Emergency Response Centre (Vadodara)	(0265) 2413753 (0265) 2413635 9879615020	(0265) 2420881
Regional Emergency Response Centre (Rajkot)	9624703444 (0281) 2227222 9714503715	(0281) 2226185
Regional Emergency Response Centre (Surat)	(0261) 2414139 (0261) 2414195 9724345234	(0261) 2451935
Regional Emergency Response Centre (Gandhidham)	(02832) 252347	(02832) 224150
Central Control Room Material Bhavan, Ground Floor, RILVMD, Po. Petrochemicals, Dist. Vadodara- 391346	(0265) 2232327 (0265) 2230342 (0265) 2230556	
Relief Commissioner Block No. 2, Ground Floor, Sachivalaya Gandhinagar.	(079) 23251900	(079) 23251912 (079) 23251916
Gujarat State Disaster Management Authority Block No. 11, 5th Floor, Udyog Bhavan, Sector – 11, Gandhinagar – 382011.	(079) 23259283 (079) 23259246 (079) 23259303	(079) 23259302 (079) 23259275
Disaster Prevention & Management Centre GIDC - Ankleshwar	(02646) 220229 (02646) 653101	
Vapi Emergency Control Centre	(0260) 2433950	
Kakrapar Atomic Power Station Kakarapar Gujarat Site PO. Anumala, Via: Vyara Dist. Surat – 394651	(02626) 230328 (02626) 234245	(02626) 234266 (02626) 234268

## Emergency Response Telephone Numbers - District level

Sr. No.	District	Code	Collector		DDO	Police	
			Control Room	(O)	(O)	Control Room	(O)
01	Ahmedabad	079	27560511	27551681	25506487	2686091	22686398
02	Amreli	02792	230735	222307	222313	223498	222333
03	Anand	02692	243222	242871	241110	261033	260027
04	Banaskantha	02742	250627	257171	254060	252600	257015
05	Bharuch	02642	242300	240600	240603	269303	223633
06	Bhavnagar	0278	2521554-55	2428822	2426810	223499	2520050
07	Dahod	02673	239277	239001	239066	222400	222300
08	Dang	02631	220347	220201	220254	220322	220248
09	Gandhinagar	079	23256720 23256639	23259029 23259030	23256983	23210914	23210901
10	Jamnagar	0288	2553404	2555869	2553901	2550200	2554203
11	Junagadh	0285	2633446-7-8	2650201 2650202	2651001	2620603	2655633
12	Kheda	0268	2562799	2550856	2557262	25611800	2550150
13	Kutch	02832	252347	250020	250080	253593	250444
14	Mehsana	02762	222220	222200 222211	222301-2	222133	222122
15	Narmada	02640	224001 224911	222161	224820	222115	222167
16	Navsari	02637	259401	244999 256556	244299 248120	246070	245333 245334
17	Panchmahals	02672	242536	242800	253377	242504	242200
18	Patan	02766	224830	233303	223440	230502	223555
19	Porbandar	0286	2245800	2243800	2243804	2240922	2211222
20	Rajkot	0281	2471573	2473900 2479351	2477008	2445975	2446333
21	Sabarkantha	02772	230100249039	241001 240600	242350	241303	247333
22	Surat	0261	2465112	2471121 2472471	2422160	2463976	2463976 2463978
23	Surendranagar	02752	284300 283400	282200	283752	230452	282100
24	Tapi	02626	224401 223332	224400	222141		222700
25	Vadodara	0265	2427592	2423100	2432027	2419777	2412255
26	Valsad	02632	243238	253613 243417	253184	253333	254222 248053

## Emergency Response Telephone Numbers

Agency	Phone No.	Fax. No.
National Disaster Management Authority (NDMA) NDMA Bhawan, A-1, Safdarjung Enclave, New Delhi	(011) 26701700 (011) 26701728	(011) 26701729
Director General Factory Advice Service & Labour Institutes Ministry of Labour, Government of India, Sion, Mumbai - 400 022	(022) 24092203	(022) 24071986
National Institute of Occupational Health Meghani Nagar, Ahmedabad – 380 016	(079) 22686351 (079) 22686352	
Director Industrial safety & Health, Gujarat 3rd & 5th Floor, Shram Bhavan, Nr. Gun House, Khanpur, Ahmedabad	(079) 25502349 (079) 25502346 (079) 25502356	(079) 2550 2357
Gujarat Pollution Control Board Paryavaran Bhavan, Sector – 10 A Gandhinagar - 382010	(079) 2323 2152	(079) 2323 2156 (079) 2322 2784
Gujarat Industrial Development Corporation Udyog Bhavan, Gandhinagar	(079) 23250581 (079) 23250636 (079) 23250637	(079) 2325 0582
Petroleum & Explosive Safety Organization 8th Floor, Yash Kamal Building, Sayajigunj Vadodara - 390001	(0265) 2225159 (0265) 2361035	
Ministry of Chemicals & Fertilizers Janpath Bhawan, 3rd Floor, B-Wing, Janpath, New Delhi-110001	(011) 23715370	(011) 23725114
Ministry of Petroleum & Natural Gas Shastri Bhavan, New Delhi - 110001	(011) 23386965	(011) 23383100
Ministry of Environment & Forests Paryavaran Bhavan CGO Complex, Lodhi Road New Delhi - 110 003	(011) 24361669 (011) 24362064	
Council of Scientific and Industrial Research Anusandhan Bhawan, 2 Rafi Marg, New Delhi-110001, India	(011) 23710138 (011) 23710144 (011) 23710158	
National Safety Council Plot No.98-A, Institutional Area, Sector 15, CBD Belapur, Navi Mumbai - 400 614	(022) 2757 9924	(022) 27577351
Disaster Management Institute Paryavaran Parisar, E-5, Arera Colony, PB No. 563 Bhopal-462016, MP (India)	(0755) 2466715 (0755) 2461348	(0755) 2466653
Gujarat Safety Council Midway Height, 4th Floor, Beside Panchmukhi Hanuman Temple, Tilak Road, Kalaghoda, Vadodara- 390 001	(0265) 2429589 (0265) 6596727	(0265) 2425202
Indian Institute of Chemical Technology Uppal Road, Tarnaka, Hyderabad - 500 007	(040) 27193030	(040) 27160387
Industrial Toxicology Research Centre Post Box No. 80, Mahatma Gandhi Marg Lucknow - 226 001, India	(0522) 2621856 (0522) 2628227	(0522) 2628227 (0522) 2611547

## NOTES